GREENHURST


F1101/67603


PATIO AWNING

CONTENTS

YOUR DELIVERY CARTON CONTAINS THE FOLLOWING COMPONENTS:

1 x PRE-ASSEMBLED FRAME AND FABRIC AWNING (2.5m. 3m. or 3.5m. version)
2 x MOUNTING BRACKETS & 2 x RETAINING NUTS, BOLTS AND WASHERS (3 for 3.5m Awning)
4 x 14mm EXPANDING WALL BOLTS with flat and spring washers (6 for 3.5m Awning)
1 x DETACHABLE WINDING HANDLE

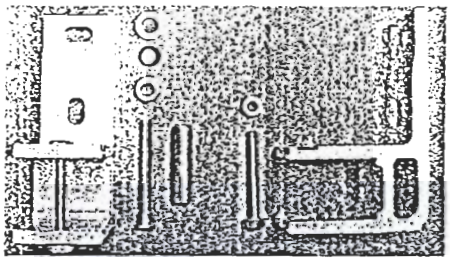

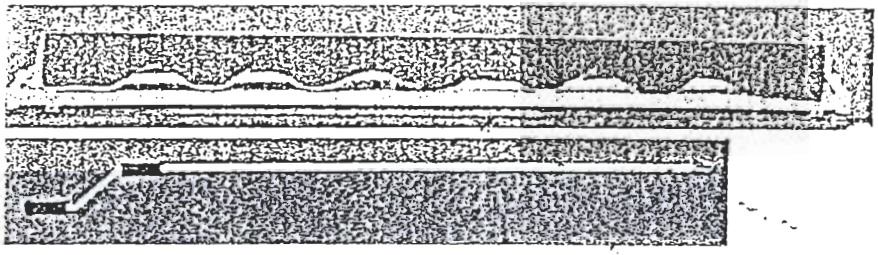


ASSEMBLY INSTRUCTIONS

The Greenhurst sun awning is easily erected in about 60 minutes. For safe and easy location of the awning frame we recommend that 2 people are required for lifting and positioning the awning into place. Please ensure that there is no damage to the awning or missing parts prior to installation and read and familiarise yourself with the fitting procedure and parts prior to commencing or engaging contractors.

Tools required:

- Power drill
- 14 mm Masonry drill bit
- Spirit level
- Adjustable spanner

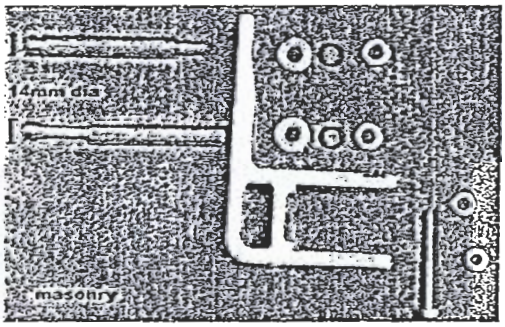

Bracket fixing
Drill 14mm dia. hole to full depth of bolt sleeve
Insert bolt & sleeve into hole (tapered head and slots to rear)
Locate bracket over bolts, position steel washer, spring washer and nut then tighten

METHOD


- Determine at what height the awning is required, taking into account door clearances, angle of slope etc. and mark a horizontal line on the wall. (the maximum drop of a 2.5m awning is around 54" and a 3.5m around 60" - the angle of slope is variable between horizontal and around 50° depression)

- Fixings are supplied for standard masonry only, alternative locations (wood, soffits, pelmets, eaves etc.) may require alternative fixings which should be obtained from a DIY store or builders merchants.

- Brackets can be mounted either way up according to preference and location restrictions - Fix two brackets onto the wall in line with the horizontal mark – for optimum weight distribution the brackets should be approximately 5 - 75 cms from the outer ends of the awning according to width, location and preference ENSURE THE POSITIONING OF THE WALL BRACKETS DOES NOT COINCIDE WITH THE FIXED ARM RETAINING BRACKETS OR THE END BRACKETS ON THE FRAME (For 3.5m awning the third bracket should be located centrally) – The expanding bolts will be more secure if located in brickwork rather than mortar

- Lift and locate the awning into position carefully in the brackets (ensuring that the fabric is the correct way up i.e. roller higher than the back bar) and secure using the 2 (or 3 for 3.5m awning) retaining bolts and washers

OPERATION

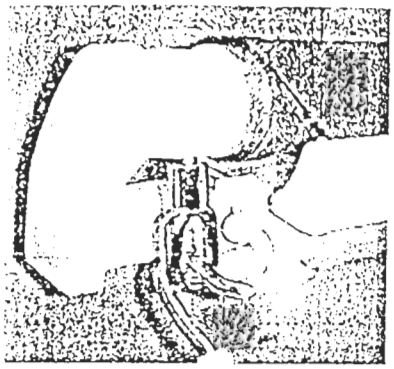

To extend the awning attach the winding handle to the winding ring loop and turn clockwise until fully opened

To retract the awning turn the handle anti-clockwise

The winding handle can be removed when the awning is not in use

ADJUSTMENT


If after first extension the awning appears uneven, this can be easily adjusted by first removing the white plastic nut caps, then slackening the adjustment bolts at each side of the awning frame, and repositioning the extending arm to the appropriate angle (a spirit level is located on the front bar), before re-tightening the bolts and setting the stopper bolt.
The overall angle of the awning slope can be determined and set in the same way

N.B. THE ARMS DO NOT EXTEND FULLY AND ARE DESIGNED TO REMAIN ANGLED FOR EXTRA STABILITY



<u>To level awning</u>
- adjust one or both arms by slackening the locking bolts and raising or lowering the angle by adjusting the arms using the stopper bolt and observing the attached spirit level

<u>To adjust pitch</u>
- adjust both arms to required angle of pitch and level in the same way as above

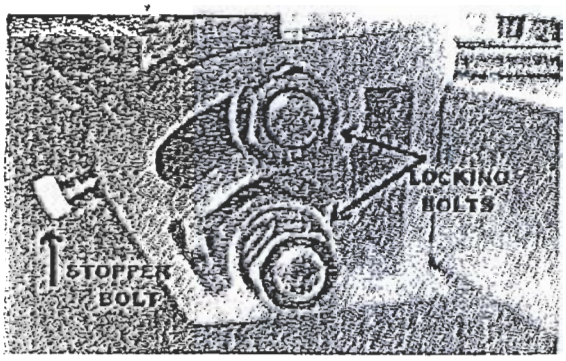

GENERAL CARE AND PRECAUTIONS

Greenhurst patio awnings are constructed from weather resistant powder-coated metal and hard-wearing PU / UV treated polyester fabric, and are designed to give many years of service. Stains and bird droppings etc. should not be left for prolonged periods and can easily be washed or sponged away, using a mild detergent or specialist cleaning materials suitable for man-made fibres

The awning is intended to provide shade from direct sunlight, not protection from the harsher elements such as rain and wind, and should always be retracted in such conditions or when not in use in case the weather should change for the worse

The awning can be easily removed from the brackets for winter storage.

CUSTOMER SERVICE & HELPLINE

Should you require further details or assistance, please contact our customer care line on 01905-7704

Answers to FAQ's – Awnings

FITTING

- Greenhurst Awnings come in 3 standard sizes 2.5m wide x 2m max extension, 3m wide x 2m max extension, 3.5m wide x 2.5m max extension – this is the overall width of the complete frame – canvas width approx.15cm less

- Fitting is achieved by firstly fixing the 2 (or 3) wall brackets to the wall then locating the awning back bar into the brackets and securing with 2 retaining bolts (full fitting instructions supplied)

- An average suggested fitting height is approx. 8'6" (260cm) above ground level, however this is dependent upon personal preference, the space available, and the desired pitch / angle of depression

- The desired pitch / angle of depression can be set anywhere between horizontal and 40° – this is achieved by loosening the 2 bolts on each arm, adjusting the stopper bolt to the desired angle and re-tightening the bolt (shown in instruction sheet)

- Brackets can be mounted at any sensible distance apart, as the awning back bar simply slides into the jaws of the brackets

- Only standard brackets and expanding masonry fixings are available from Greenhurst – alternative types of bracket and / or fixings can be sourced separately by customers

- The aluminium "F" shaped brackets can be mounted either way up! (2 supplied with 2.5m / 3m awnings and 3 with 3.5m) – pairs of additional brackets available from Greenhurst @ £13 per pair inc. p&p

FITTING TO BUNGALOW / CONFINED SPACE

- The bracket "footprint" is 6" x 2 1/2" (150mm x 65mm) overall when retracted the end section is 7" x 7" (180mm x 180mm)

- As it is a DIY product customers must always themselves ensure the method / location for fixing is adequate – weights are 15kg / 17kg / 20kg approx. A spreader plate / back runner etc can be fitted to the wall to help weight distribution

OPERATION

- The winder is always on the left hand side facing (and cannot be moved to right side)

- The arms do not fully straighten, they are designed to stay at an angle for added strength

- Side curtains and spare fabric are NOT available

- If the fabric appears to be "underneath" the roller instead of rolled over the top – extend the awning fully and keep winding in the same direction – fabric will re-roll *over* the roller

- Levelling is done via the 2 side adjusting bolts and stopper bolt

- If fabric rolls back unevenly, this may be resolved by a few opening / closings, however the usual causes are movement of one of the fixed arm brackets (customer may be able to re-align and tighten), incorrect seam tension on fabric or unequal tension in the arms (both are faults which cannot be rectified by the customer)

- Full technical helpline available on 01905 779922

- CARE
- Joints can be lubricated with oil / WD40 etc if squeaking – best way to lubricate winding mechanism is to take awning down from brackets – invert, and let lubricant run down winder stem

- Normal stains / soiling should be removed as soon as possible using mild detergent and a stiff brush – if a proprietary fabric cleaner is used it should be compatible with man made fibres / polyester

- Whilst the awning can be left up all year we suggest to prolong its life and appearance it is removed from the brackets and stored in its original packaging throughout the winter months

- Inevitable weathering will occur, particularly to the exposed fringe, if left out in prolonged inclement winter conditions

- As Greenhurst implement a constant programme of updating and improvement, models are periodically enhanced and it is therefore essential that the specific model number is quoted in addition to colour and size

Invoice to:

ORDER

Tel:
E-Mail:

Sun Awning Direct Delivery Order Form


Code	Description	Colour	Size	Quantity
4317	Sun Awning *Henley*	(green/white)	2.5m	
4319	Sun Awning *Ascot*	(green/beige)	2.5m	
4342	Sun Awning *Windsor*	(yellow/grey)	2.5m	
4337	Sun Awning *Kingston (terracotta stripe)*		2.5m	

£229



4340	Sun Awning *Henley*	(green/white)	3m	
4341	Sun Awning *Ascot*	(green/beige)	3m	
4343	Sun Awning *Windsor*	(yellow/grey)	3m	
4338	Sun Awning *Kingston (terracotta stripe)*		3m	


£259

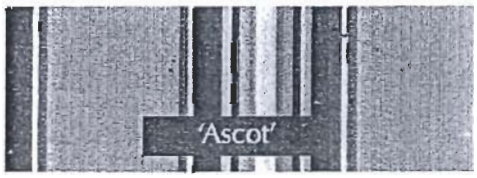



4320	Sun Awning *Henley*	(green/white)	3.5m	
4321	Sun Awning *Ascot*	(green/beige)	3.5m	
4344	Sun Awning *Windsor*	(yellow/grey)	3.5m	
4339	Sun Awning *Kingston (terracotta stripe)*		3.5m	

£329

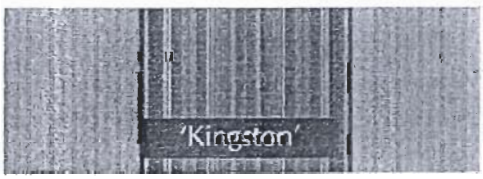

Customer name	Date
Address	
Street	Mobile phone
District	Daytime phone
Town	Alternative phone/E-mail address
County	
Post code	

Fax to Gablemere on 01905 794666

FOR CENTRE USE ONLY	
Centre Name	
Centre P.O. No.	
Order Taken By	
Customer Receipt No.	