

Notes
Report any discrepancies to the author.

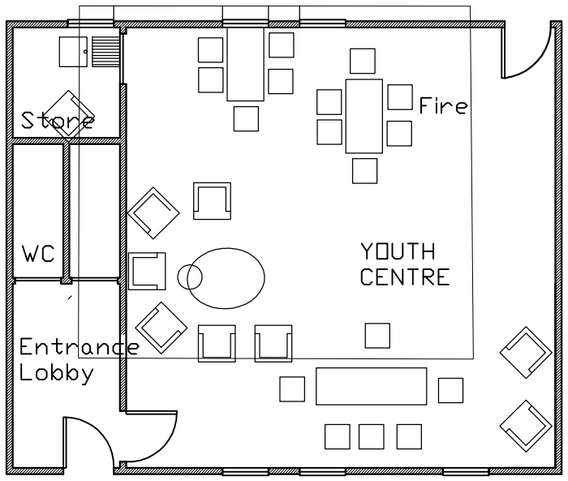


Proposed Plan

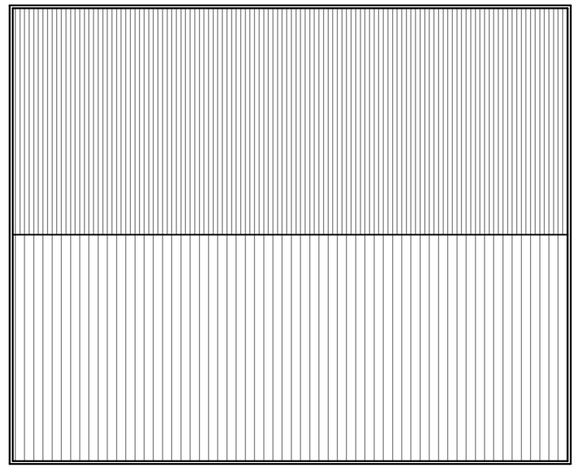


Proposed Roof Plan

1 0 1 2 3 4 5


SCALE

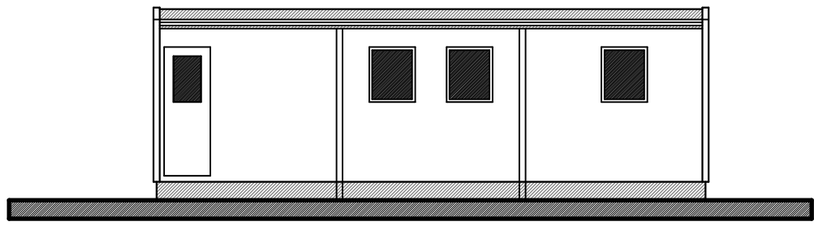


Rear Elevation

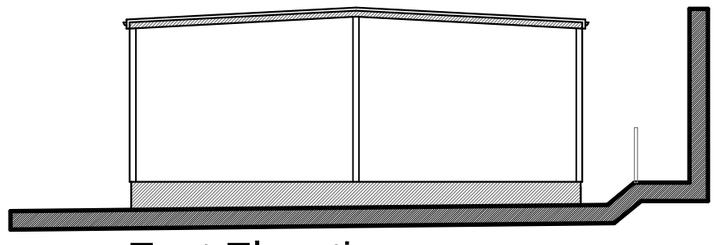

East Elevation

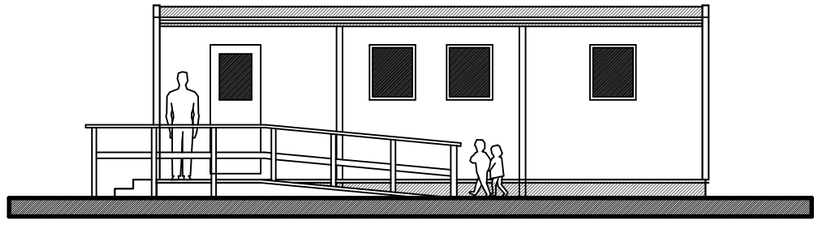

Front Elevation - South

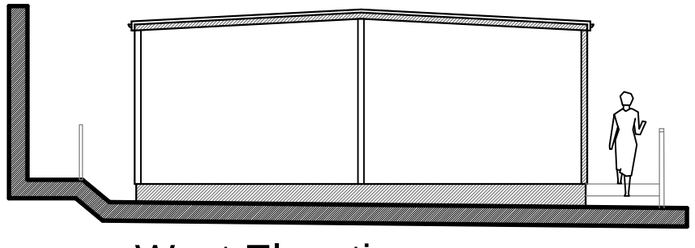

West Elevation

Notes

The proposed Centre is to be a prefabricated modular building

Foundations

The building is supported on steel posts which will sit partly on the concrete slab of the existing garage and partly on 6 new 600x600x150 shallow concrete pad foundations

Finishes

The building is constructed in pre-finished grey colour coated metal panels

White painted aluminium window frames

Painted timber doors

Painted plywood skirt to hide support steel

Roof

Single-ply dark grey membrane with black PVC gutters and down-pipes

Access ramp to be treated softwood with a natural stain finish

Rev	Description	Date
A	Planning Application issue	01 05 13

Temple Ford Design Ltd
templeforddesign@gmail.com

Client
St Martin in the Wood
Queens Road Chandlers Ford

Project
Proposed Temporary Youth Centre

Drawing
Plans and Elevations as Proposed

Scale	Sheet Size	Date
1:100	A3	April 2013

Project No	Drawing No	Revision
1447	004	A