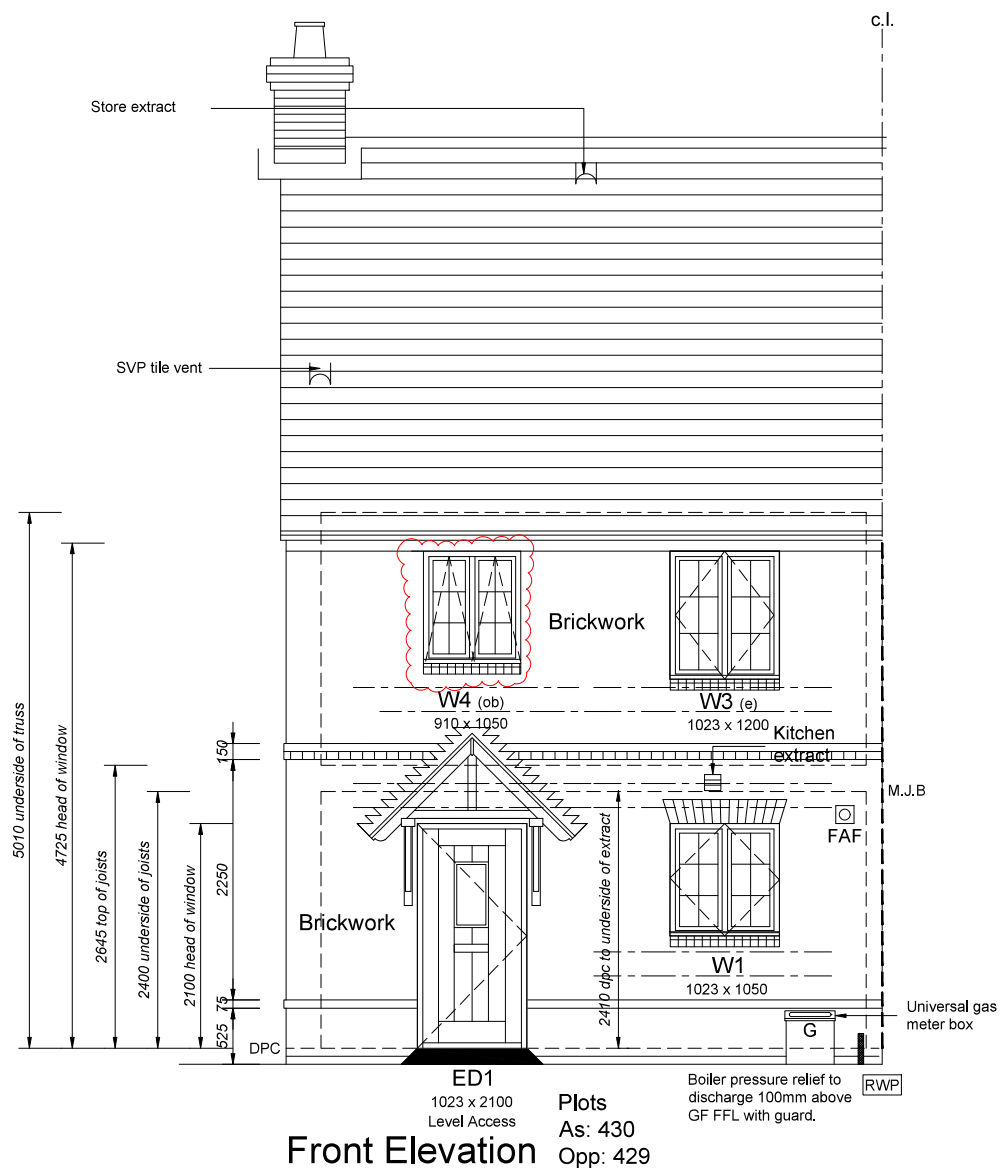


Sales Floor Area

93.69m² / 1007 sq ft

Affordable Homes Layout:

A31 3B5P

**BED JOINT REINFORCEMENT LEGEND**

BED JOINT REINFORCEMENT TO SUIT FENESTRATION DETAIL:
On units with reconstructed stone or Render finish install 2 rows of Brickforce SBF35W60 bed joint reinforcement at 225mm vertical ctrs and extend min 600mm past the structural opening. Refer to the Technical specification for further information.

BRICKTOR BED JOINT REINFORCEMENT:
Where specified install 2 rows of Bricktor SBT60CCR bed joint reinforcement at 225mm vertical ctrs and extend min 600mm past the structural opening. Refer to the Technical specification for further information.

NOTES: THIS DRAWING IS TO BE READ IN CONJUNCTION WITH THE LINDEN HOMES TECHNICAL SPECIFICATION.

ELEVATION LEGEND

c.l.	Centre line
M.J.B	Movement joint in Brick
M.J.R	Movement joint in Render / Recon Stone
RWP	Rainwater pipe
DPC	Damp proof course
FAF	Fan assisted flue
SVP	Soil vent pipe
(e)	Emergency egress window
(SG)	Safety glass to windows & doors
(ob)	Obscure glazing
★	Fixed casement
(g)	Guarding to inside of window
G	Gas meter box
	Extract fan ducted within floor zone
	Tile vent for extract fan or SVP.

Linden GallifordTry
HOMES

© 2015 Linden Limited All Rights Reserved

PROJECT

Affordable Homes Layouts

For Linden Homes

Boorley Green, Phase 2, Parcel B6

DRAWING

Front Elevation

House Type A31 3B5P

SCALE	DATE	AUTHOR	CHK'D
1:50 @ A3	April 2019	KIM	WKB
JOB NO.	DRAWING NO.	REV	
LHS307	A31-600	P13	
CLIENT REF.			

NOTE: For bed joint reinforcement.
Elevations shown as Brick, no bed joint reinforcement required. Setting out for Render/Recon Stone coursing heights may be adjusted depending on openings.

NOTE: Emergency egress windows to have a clear opening of 450 x 735mm (0.33m²), openable part of windows to be located within 800 to 1100mm from finished floor level.

NOTE: For rainwater downpipe locations, refer to plot specific drawings.

NOTE: For recon stone units, ensure mortar is colour matched to the stone.

Sales Floor Area

93.69m² / 1007 sq ft

Affordable Homes Layout:

A31 3B5P

NOTES: THIS DRAWING IS TO BE READ IN CONJUNCTION WITH THE LINDEN HOMES TECHNICAL SPECIFICATION.


BED JOINT REINFORCEMENT LEGEND

BED JOINT REINFORCEMENT TO SUIT FENESTRATION DETAIL:
On units with reconstructed stone or Render finish install 2 rows of Brickforce SBF35W60 bed joint reinforcement at 225mm vertical ctrs and extend min 600mm past the structural opening. Refer to the Technical specification for further information.

BRICKTOR BED JOINT REINFORCEMENT:
Where specified install 2 rows of Bricktor SBT60CCR bed joint reinforcement at 225mm vertical ctrs and extend min 600mm past the structural opening. Refer to the Technical specification for further information.

ELEVATION LEGEND

c.l.	Centre line
M.J.B	Movement joint in Brick
M.J.R	Movement joint in Render / Recon Stone
RWP	Rainwater pipe
DPC	Damp proof course
FAF	Fan assisted flue
SVP	Soil vent pipe
(e)	Emergency egress window
(SG)	Safety glass to windows & doors
(ob)	Obscure glazing
★	Fixed casement
(g)	Guarding to inside of window
G	Gas meter box
	Extract fan ducted within floor zone
	Tile vent for extract fan or SVP.

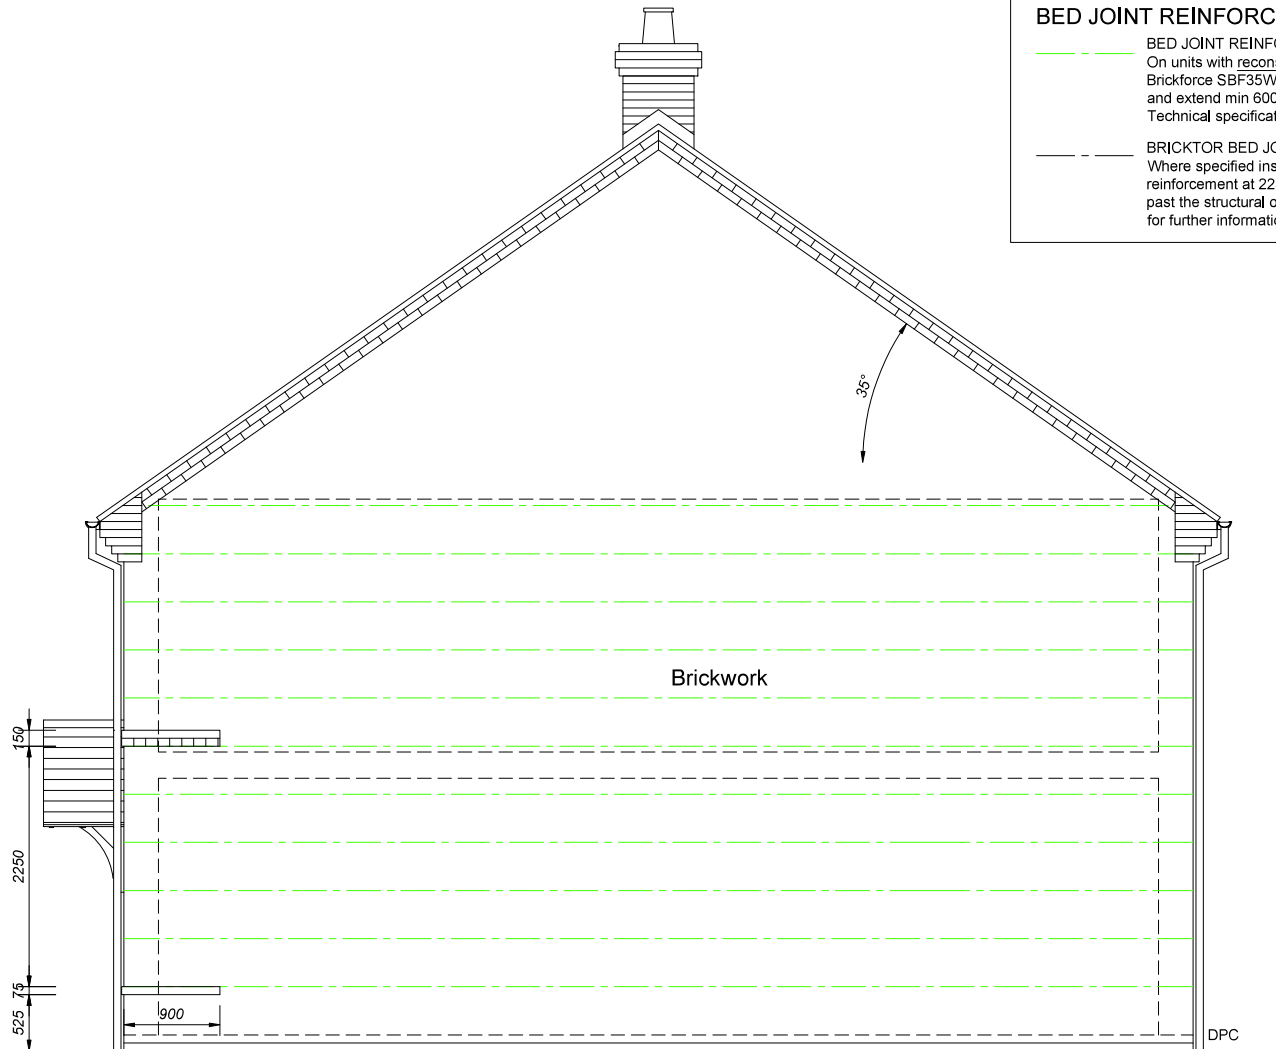

Side Elevation Plots Opp: 429

NOTE: For rainwater downpipe locations, refer to plot specific drawings.

NOTE: For recon stone units, ensure mortar is colour matched to the stone.

NOTE: Emergency egress windows to have a clear opening of 450 x 735mm (0.33m²), openable part of windows to be located within 800 to 1100mm from finished floor level.

NOTE: For bed joint reinforcement. Elevations shown as Brick, no bed joint reinforcement required. Setting out for Render/Recon Stone coursing heights may be adjusted depending on openings.

Linden GallifordTry
HOMES

© 2015 Linden Limited All Rights Reserved

PROJECT

Affordable Homes Layouts

For Linden Homes

Boorley Green, Phase 2, Parcel B6

DRAWING

Side Elevation

House Type A31 3B5P


SCALE	DATE	AUTHOR	CHK'D
1:50 @ A3	April 2019	KIM	WKB
JOB NO.	DRAWING NO.	REV	
LHS307	A31-601	P13	
CLIENT REF.			

Sales Floor Area

93.69m² / 1007 sq ft

Affordable Homes Layout:

A31 3B5P

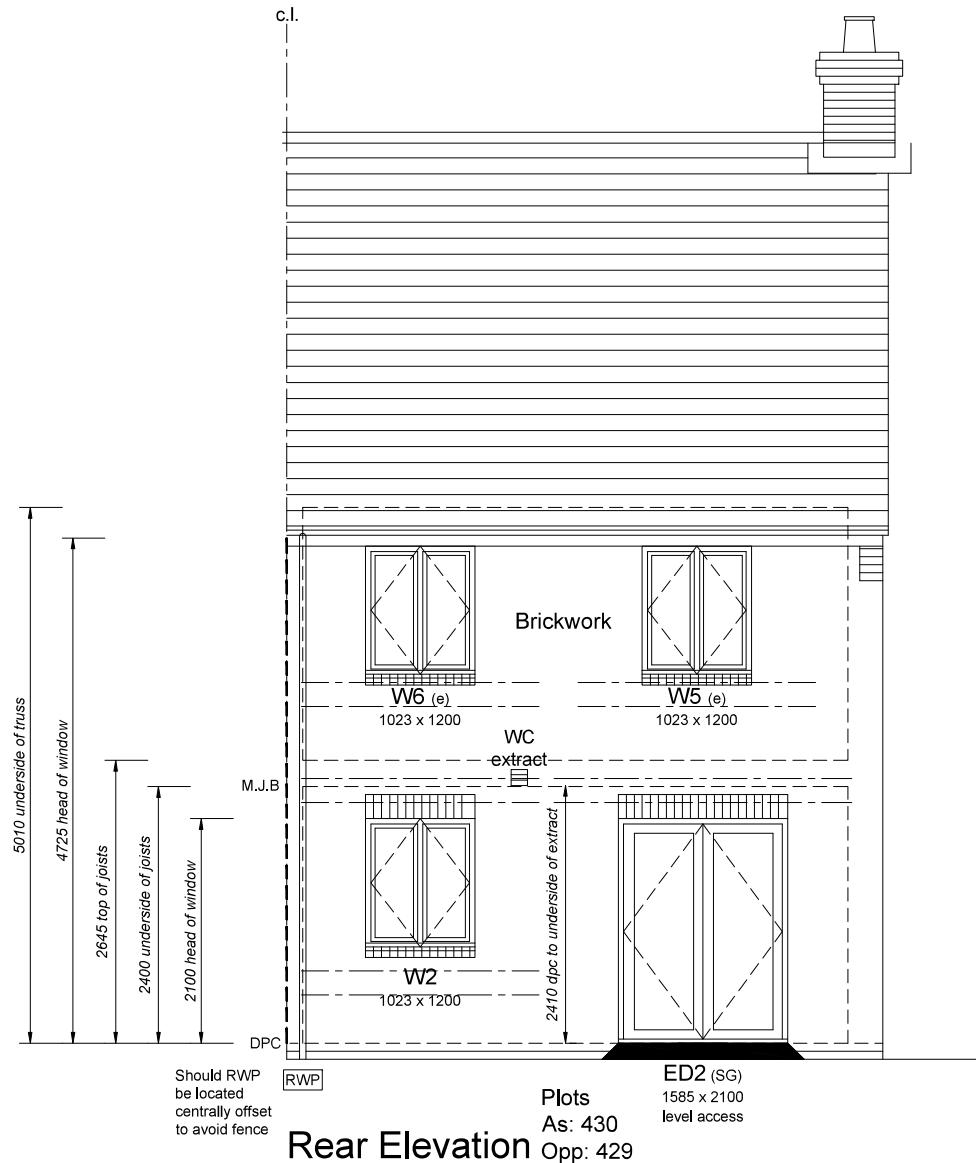

Rear Elevation

NOTE: For bed joint reinforcement.
Elevations shown as Brick, no bed joint reinforcement required. Setting out for Render/Recon Stone coursing heights may be adjusted depending on openings.

NOTE: Emergency egress windows to have a clear opening of 450 x 735mm (0.33m²), openable part of windows to be located within 800 to 1100mm from finished floor level.

BED JOINT REINFORCEMENT LEGEND

BED JOINT REINFORCEMENT TO SUIT FENESTRATION DETAIL:
On units with reconstructed stone or Render finish install 2 rows of Brickforce SBF35W60 bed joint reinforcement at 225mm vertical ctrs and extend min 600mm past the structural opening. Refer to the Technical specification for further information.

BRICKTOR BED JOINT REINFORCEMENT:
Where specified install 2 rows of Bricktor SBT60CCR bed joint reinforcement at 225mm vertical ctrs and extend min 600mm past the structural opening. Refer to the Technical specification for further information.

NOTES: THIS DRAWING IS TO BE READ IN CONJUNCTION WITH THE LINDEN HOMES TECHNICAL SPECIFICATION.

ELEVATION LEGEND

c.l.	Centre line
M.J.B	Movement joint in Brick
M.J.R	Movement joint in Render / Recon Stone
RWP	Rainwater pipe
DPC	Damp proof course
FAF	Fan assisted flue
SVP	Soil vent pipe
(e)	Emergency egress window
(SG)	Safety glass to windows & doors
(ob)	Obscure glazing
★	Fixed casement
(g)	Guarding to inside of window
G	Gas meter box
	Extract fan ducted within floor zone
	Tile vent for extract fan or SVP.

Linden GallifordTry
HOMES

© 2015 Linden Limited All Rights Reserved

PROJECT

Affordable Homes Layouts

For Linden Homes

Boorley Green, Phase 2, Parcel B6

DRAWING

Rear Elevation

House Type A31 3B5P

SCALE	DATE	AUTHOR	CHK'D
1:50 @ A3	April 2019	KIM	WKB
JOB NO.	DRAWING NO.	REV	
LHS307	A31-602	P13	
CLIENT REF.			

NOTE: For rainwater downpipe locations, refer to plot specific drawings.


NOTE: For recon stone units, ensure mortar is colour matched to the stone.

Sales Floor Area

93.69m² / 1007 sq ft

Affordable Homes Layout:

A31 3B5P

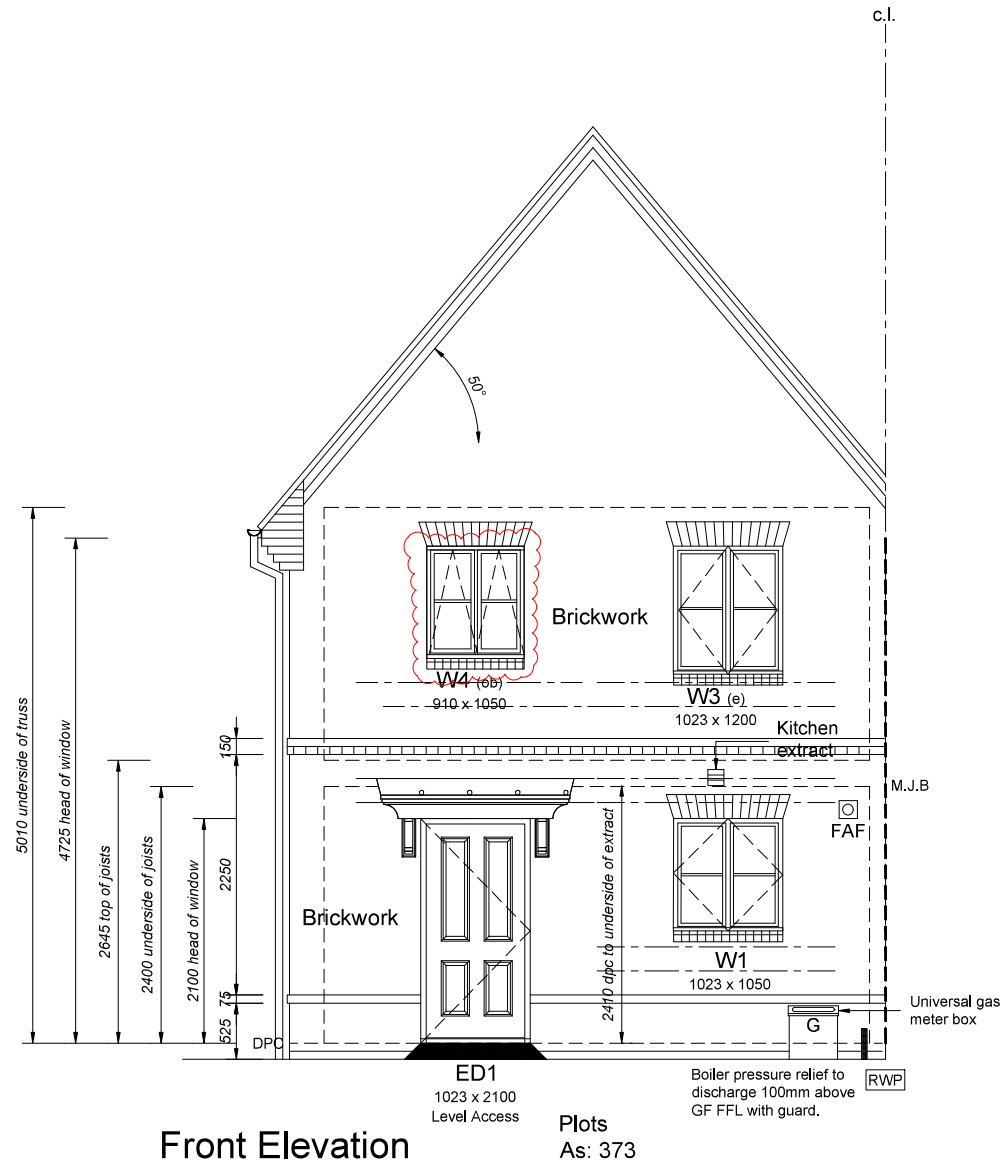

Front Elevation

Plots
As: 373

NOTE: For bed joint reinforcement.
Elevations shown as Brick, no bed joint reinforcement required. Setting out for Render/Recon Stone coursing heights may be adjusted depending on openings.

NOTE: Emergency egress windows to have a clear opening of 450 x 735mm (0.33m²), openable part of windows to be located within 800 to 1100mm from finished floor level.

BED JOINT REINFORCEMENT LEGEND

BED JOINT REINFORCEMENT TO SUIT FENESTRATION DETAIL:
On units with reconstructed stone or Render finish install 2 rows of Brickforce SBF35W60 bed joint reinforcement at 225mm vertical ctrs and extend min 600mm past the structural opening. Refer to the Technical specification for further information.

BRICKTOR BED JOINT REINFORCEMENT:
Where specified install 2 rows of Bricktor SBT60CCR bed joint reinforcement at 225mm vertical ctrs and extend min 600mm past the structural opening. Refer to the Technical specification for further information.

NOTES: THIS DRAWING IS TO BE READ IN CONJUNCTION WITH THE LINDEN HOMES TECHNICAL SPECIFICATION.

ELEVATION LEGEND

c.l.	Centre line
M.J.B	Movement joint in Brick
M.J.R	Movement joint in Render / Recon Stone
RWP	Rainwater pipe
DPC	Damp proof course
FAF	Fan assisted flue
SVP	Soil vent pipe
(e)	Emergency egress window
(SG)	Safety glass to windows & doors
(ob)	Obscure glazing
★	Fixed casement
(g)	Guarding to inside of window
G	Gas meter box
	Extract fan ducted within floor zone
	Tile vent for extract fan or SVP.

Linden GallifordTry
HOMES

© 2015 Linden Limited All Rights Reserved

PROJECT

Affordable Homes Layouts

For Linden Homes

Boorley Green, Phase 2, Parcel B6

DRAWING

Front Elevation - Plot 373

House Type A31 3B5P

SCALE	DATE	AUTHOR	CHK'D
1:50 @ A3	April 2019	KIM	WKB
JOB NO.	DRAWING NO.	REV	
LHS307	A31-603	P13	
CLIENT REF.			

NOTE: For rainwater downpipe locations, refer to plot specific drawings.


NOTE: For recon stone units, ensure mortar is colour matched to the stone.

Sales Floor Area

93.69m² / 1007 sq ft

Affordable Homes Layout:

A31 3B5P

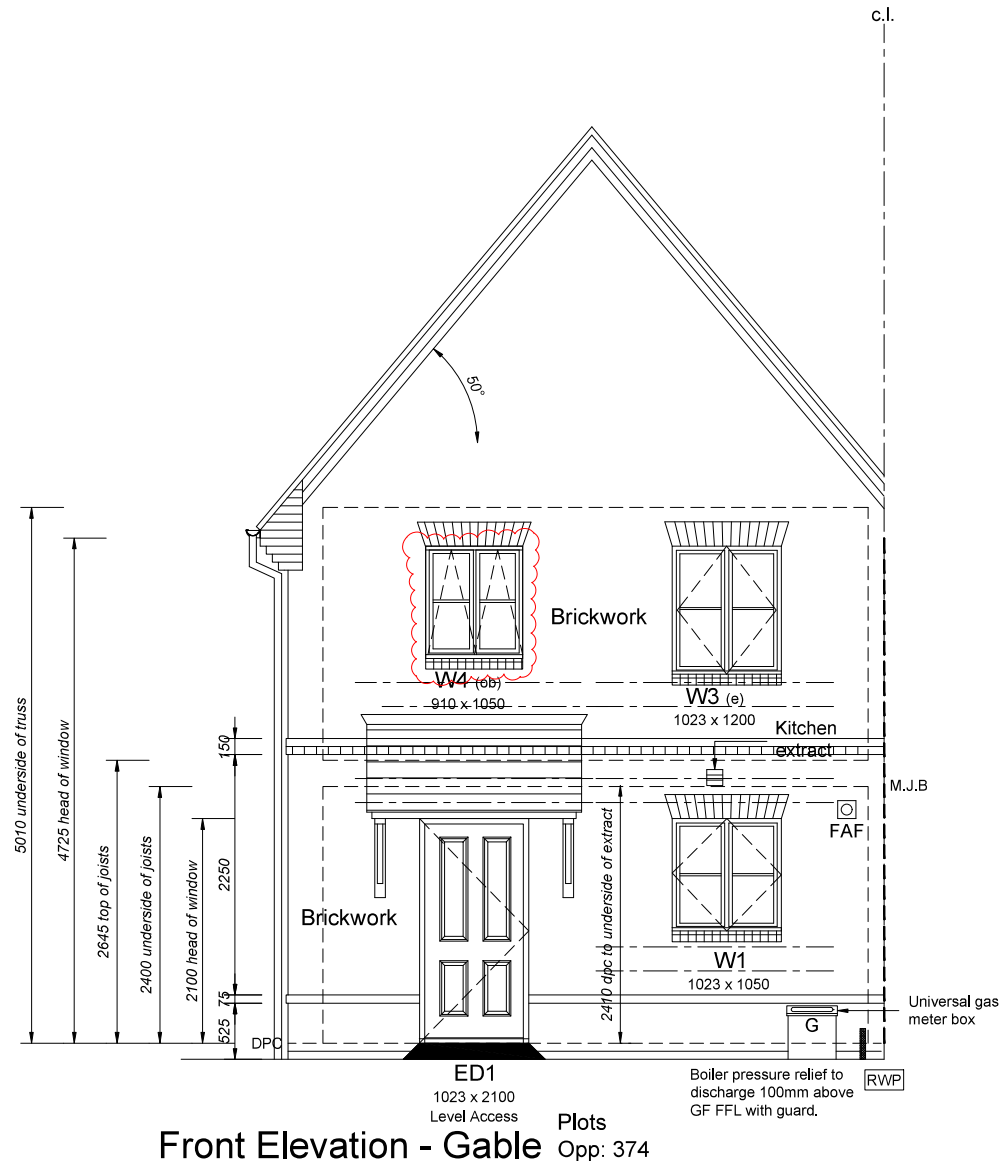**BED JOINT REINFORCEMENT LEGEND****BED JOINT REINFORCEMENT TO SUIT FENESTRATION DETAIL:**

On units with reconstructed stone or Render finish install 2 rows of Brickforce SBF35W60 bed joint reinforcement at 225mm vertical ctrs and extend min 600mm past the structural opening. Refer to the Technical specification for further information.

BRICKTOR BED JOINT REINFORCEMENT:

Where specified install 2 rows of Bricktor SBT60CCR bed joint reinforcement at 225mm vertical ctrs and extend min 600mm past the structural opening. Refer to the Technical specification for further information.

NOTES: THIS DRAWING IS TO BE READ IN CONJUNCTION WITH THE LINDEN HOMES TECHNICAL SPECIFICATION.

ELEVATION LEGEND

c.l.	Centre line
M.J.B	Movement joint in Brick
M.J.R	Movement joint in Render / Recon Stone
RWP	Rainwater pipe
DPC	Damp proof course
FAF	Fan assisted flue
SVP	Soil vent pipe
(e)	Emergency egress window
(SG)	Safety glass to windows & doors
(ob)	Obscure glazing
★	Fixed casement
(g)	Guarding to inside of window
G	Gas meter box
	Extract fan ducted within floor zone
	Tile vent for extract fan or SVP.

Linden GallifordTry
HOMES

© 2015 Linden Limited All Rights Reserved

PROJECT

Affordable Homes Layouts

For Linden Homes

Boorley Green, Phase 2, Parcel B6

DRAWING

Front Elevation - Plot 374

House Type A31 3B5P

SCALE	DATE	AUTHOR	CHK'D
1:50 @ A3	April 2019	KIM	WKB
JOB NO.	DRAWING NO.	REV	
LHS307	A31-604	P13	
CLIENT REF.			

NOTE: For bed joint reinforcement. Elevations shown as Brick, no bed joint reinforcement required. Setting out for Render/Recon Stone coursing heights may be adjusted depending on openings.

NOTE: Emergency egress windows to have a clear opening of 450 x 735mm (0.33m²), openable part of windows to be located within 800 to 1100mm from finished floor level.

NOTE: For rainwater downpipe locations, refer to plot specific drawings.

NOTE: For recon stone units, ensure mortar is colour matched to the stone.

Sales Floor Area

93.69m² / 1007 sq ft

Affordable Homes Layout:

A31 3B5P

BED JOINT REINFORCEMENT LEGEND

 BED JOINT REINFORCEMENT TO SUIT FENESTRATION DETAIL:
On units with reconstructed stone or Render finish install 2 rows of Brickforce SBF35W60 bed joint reinforcement at 225mm vertical ctrs and extend min 600mm past the structural opening. Refer to the Technical specification for further information.

 BRICKTOR BED JOINT REINFORCEMENT:
Where specified install 2 rows of Bricktor SBT60CCR bed joint reinforcement at 225mm vertical ctrs and extend min 600mm past the structural opening. Refer to the Technical specification for further information.

NOTES: THIS DRAWING IS TO BE READ IN CONJUNCTION WITH THE LINDEN HOMES TECHNICAL SPECIFICATION.

ELEVATION LEGEND

c.l.	Centre line
M.J.B	Movement joint in Brick
M.J.R	Movement joint in Render / Recon Stone
RWP	Rainwater pipe
DPC	Damp proof course
FAF	Fan assisted flue
SVP	Soil vent pipe
(e)	Emergency egress window
(SG)	Safety glass to windows & doors
(ob)	Obscure glazing
★	Fixed casement
(g)	Guarding to inside of window
G	Gas meter box
	Extract fan ducted within floor zone
	Tile vent for extract fan or SVP.

Linden HOMES | **GallifordTry**

© 2015 Linden Limited All Rights Reserved

PROJECT

Affordable Homes Layouts

For Linden Homes

Boorley Green, Phase 2, Parcel B6

DRAWING

Side Elevation - Gable

House Type A31 3B5P


SCALE	DATE	AUTHOR	CHK'D
1:50 @ A3	April 2019	KIM	WKB

JOB NO.	DRAWING NO.	REV
LHS307	A31-605	P13

CLIENT REF.

Bathroom extract

SVP tile vent

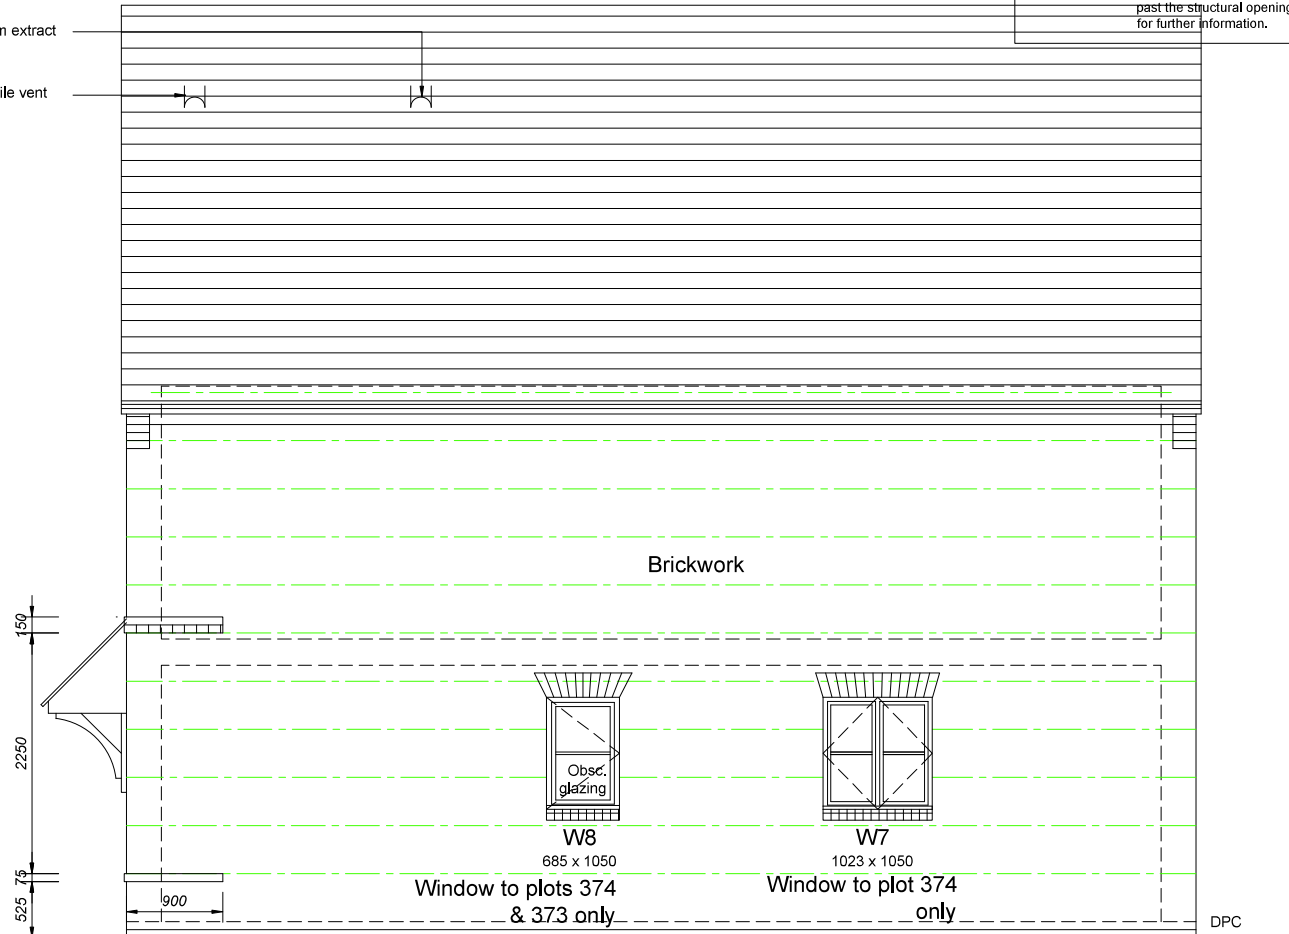

Side Elevation - Gable

Plots
As: 373
Opp: 374

NOTE: For rainwater downpipe locations, refer to plot specific drawings.

NOTE: For recon stone units, ensure mortar is colour matched to the stone.

NOTE: Emergency egress windows to have a clear opening of 450 x 735mm (0.33m²), openable part of windows to be located within 800 to 1100mm from finished floor level.

NOTE: For bed joint reinforcement. Elevations shown as Brick, no bed joint reinforcement required. Setting out for Render/Recon Stone coursing heights may be adjusted depending on openings.

93.69m² / 1007 sq ft

A31 3B5P



NOTE: Emergency egress windows to have a clear opening of 450 x 735mm (0.33m²), openable part of windows to be located within 800 to 1100mm from finished floor level.

BRICKTOR BED JOINT REINFORCEMENT:
Where specified install 2 rows of Bricktor SBT60CCR bed joint reinforcement at 225mm vertical ctrs and extend min 600mm past the structural opening. Refer to the Technical specification for further information.

c.I.	Centre line
M.J.B	Movement joint in Brick
M.J.R	Movement joint in Render / Recon Stone
RWP	Rainwater pipe
DPC	Damp proof course
FAF	Fan assisted flue
SVP	Soil vent pipe
(e)	Emergency egress window
(SG)	Safety glass to windows & doors
(ob)	Obscure glazing
★	Fixed casement
(g)	Guarding to inside of window
G	Gas meter box
	Extract fan ducted within floor zone
	Tile vent for extract fan or SVP.



© 2015 Linden Limited All Rights Reserved

PROJECT

Affordable Homes Layouts

For Linden Homes

Boorley Green, Phase 2, Parcel B

DRAWING

Rear Elevation - Gable
House Type A31 3B5P

SCALE	DATE	AUTHOR	CHK'D
1:50 @ A3	April 2019	KIM	WKE
JOB NO.	DRAWING NO.	REV	
LHS307	A31-606	P13	
CLIENT REF.			