


Sales Floor Area
77.82m²/838 sq ft

2301

NOTES: THIS DRAWING IS TO BE READ IN
CONJUNCTION WITH THE LINDEN HOMES
TECHNICAL SPECIFICATION.

ELEVATION LEGEND

Centre line	c.l.
Movement joint in Brick	M.J.B
Movement joint in Render / Recon Stone	M.J.R
Rainwater pipe	RWP
Damp proof course	DPC
Fan assisted flue	FAF
Soil vent pipe	SVP
Emergency egress window	(e)
Safety glass to windows & doors	(SG)
Obscure glazing	(ob)
Fixed casement	*
Guarding to inside of window	(g)
Gas meter box	G
Extract fan ducted within floor zone	
Tile vent for extract fan or SVP.	

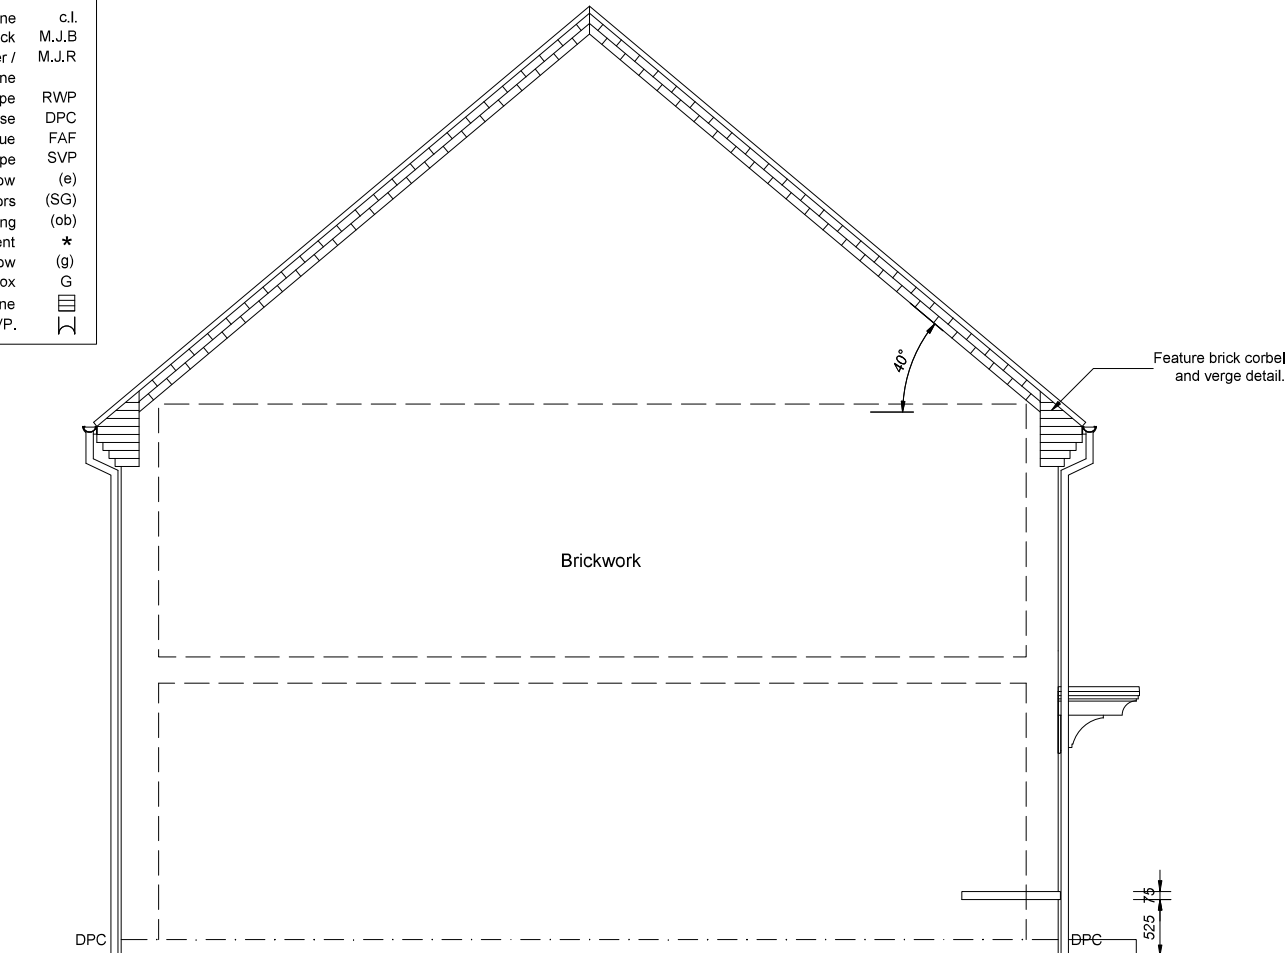

ELEVATION LEGEND

c.l.	Centre line
M.J.B	Movement joint in Brick
M.J.R	Movement joint in Render / Recon Stone
RWP	Rainwater pipe
DPC	Damp proof course
FAF	Fan assisted flue
SVP	Soil vent pipe
(e)	Emergency egress window
(SG)	Safety glass to windows & doors
(ob)	Obscure glazing
*	Fixed casement
(g)	Guarding to inside of window
G	Gas meter box
	Extract fan ducted within floor zone
	Tile vent for extract fan or SVP.

Plots

As: 337, 338 & 339

Opp:



© 2015 Linden Limited All Rights Reserved

PROJECT

Affordable Homes Layouts

For Linden Homes

Boorley Green Phase 2 Parcel B5

DRAWING

House Type 2301

Side Elevation

SCALE	DATE	AUTHOR	CHK'D
1:50 @ A3	April 2019	SGS	WKB

JOB NO.	DRAWING NO.	REV
LHS306	2301-603	C10

CLIENT REF.

NOTE: For rainwater downpipe locations,
refer to plot specific drawings.

NOTE: For recon stone units, ensure
mortar is colour matched to the stone.

NOTE: Emergency egress windows to have a clear
opening of 450 x 735mm (0.33m²), openable part
of windows to be located within 800 to 1100mm
from finished floor level.

NOTE: For bed joint reinforcement.
Elevations shown as Brick, no bed joint reinforcement
required. Setting out for Render/Recon Stone coursing
heights may be adjusted depending on openings.

Side Elevation