


Sales Floor Area
77.82m²/838 sq ft

2301

NOTES: THIS DRAWING IS TO BE READ IN CONJUNCTION WITH THE LINDEN HOMES TECHNICAL SPECIFICATION.

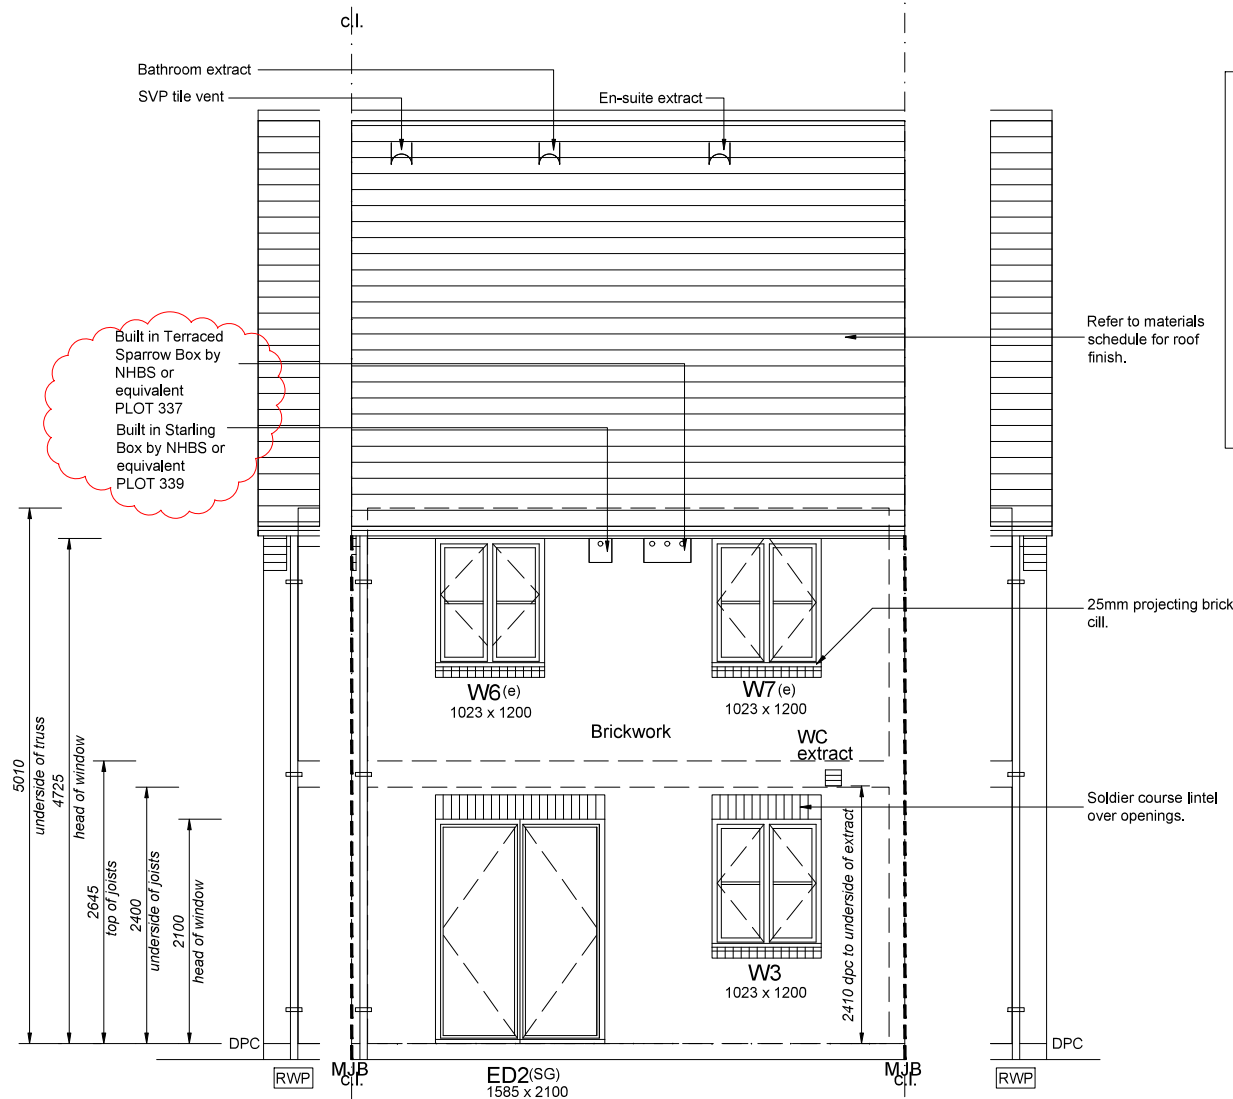

ELEVATION LEGEND

c.l.	Centre line
M.J.B	Movement joint in Brick
M.J.R	Movement joint in Render / Recon Stone
RWP	Rainwater pipe
DPC	Damp proof course
FAF	Fan assisted flue
SVP	Soil vent pipe
(e)	Emergency egress window
(SG)	Safety glass to windows & doors
(ob)	Obscure glazing
*	Fixed casement
(g)	Guarding to inside of window
G	Gas meter box
[Symbol]	Extract fan ducted within floor zone
[Symbol]	Tile vent for extract fan or SVP.

ELEVATION LEGEND

c.l.	Centre line
M.J.B	Movement joint in Brick
M.J.R	Movement joint in Render / Recon Stone
RWP	Rainwater pipe
DPC	Damp proof course
FAF	Fan assisted flue
SVP	Soil vent pipe
(e)	Emergency egress window
(SG)	Safety glass to windows & doors
(ob)	Obscure glazing
*	Fixed casement
(g)	Guarding to inside of window
G	Gas meter box
[Symbol]	Extract fan ducted within floor zone
[Symbol]	Tile vent for extract fan or SVP.

Plots
As: 337, 338 & 339
Opp:

Linden GallifordTry
HOMES

© 2015 Linden Limited All Rights Reserved

PROJECT
Affordable Homes Layouts
For Linden Homes
Boorley Green Phase 2 Parcel B5

DRAWING
House Type 2301
Rear Elevation

SCALE	DATE	AUTHOR	CHK'D
1:50 @ A3	April 2019	SGS	WKB
JOB NO.	DRAWING NO.	REV	
LHS306	2301-602	C10	
CLIENT REF.			

Rear Elevation

NOTE: For bed joint reinforcement.
Elevations shown as Brick, no bed joint reinforcement required. Setting out for Render/Recon Stone coursing heights may be adjusted depending on openings.

NOTE: Emergency egress windows to have a clear opening of 450 x 735mm (0.33m²), openable part of windows to be located within 800 to 1100mm from finished floor level.

NOTE: For rainwater downpipe locations, refer to plot specific drawings.

NOTE: For recon stone units, ensure mortar is colour matched to the stone.