


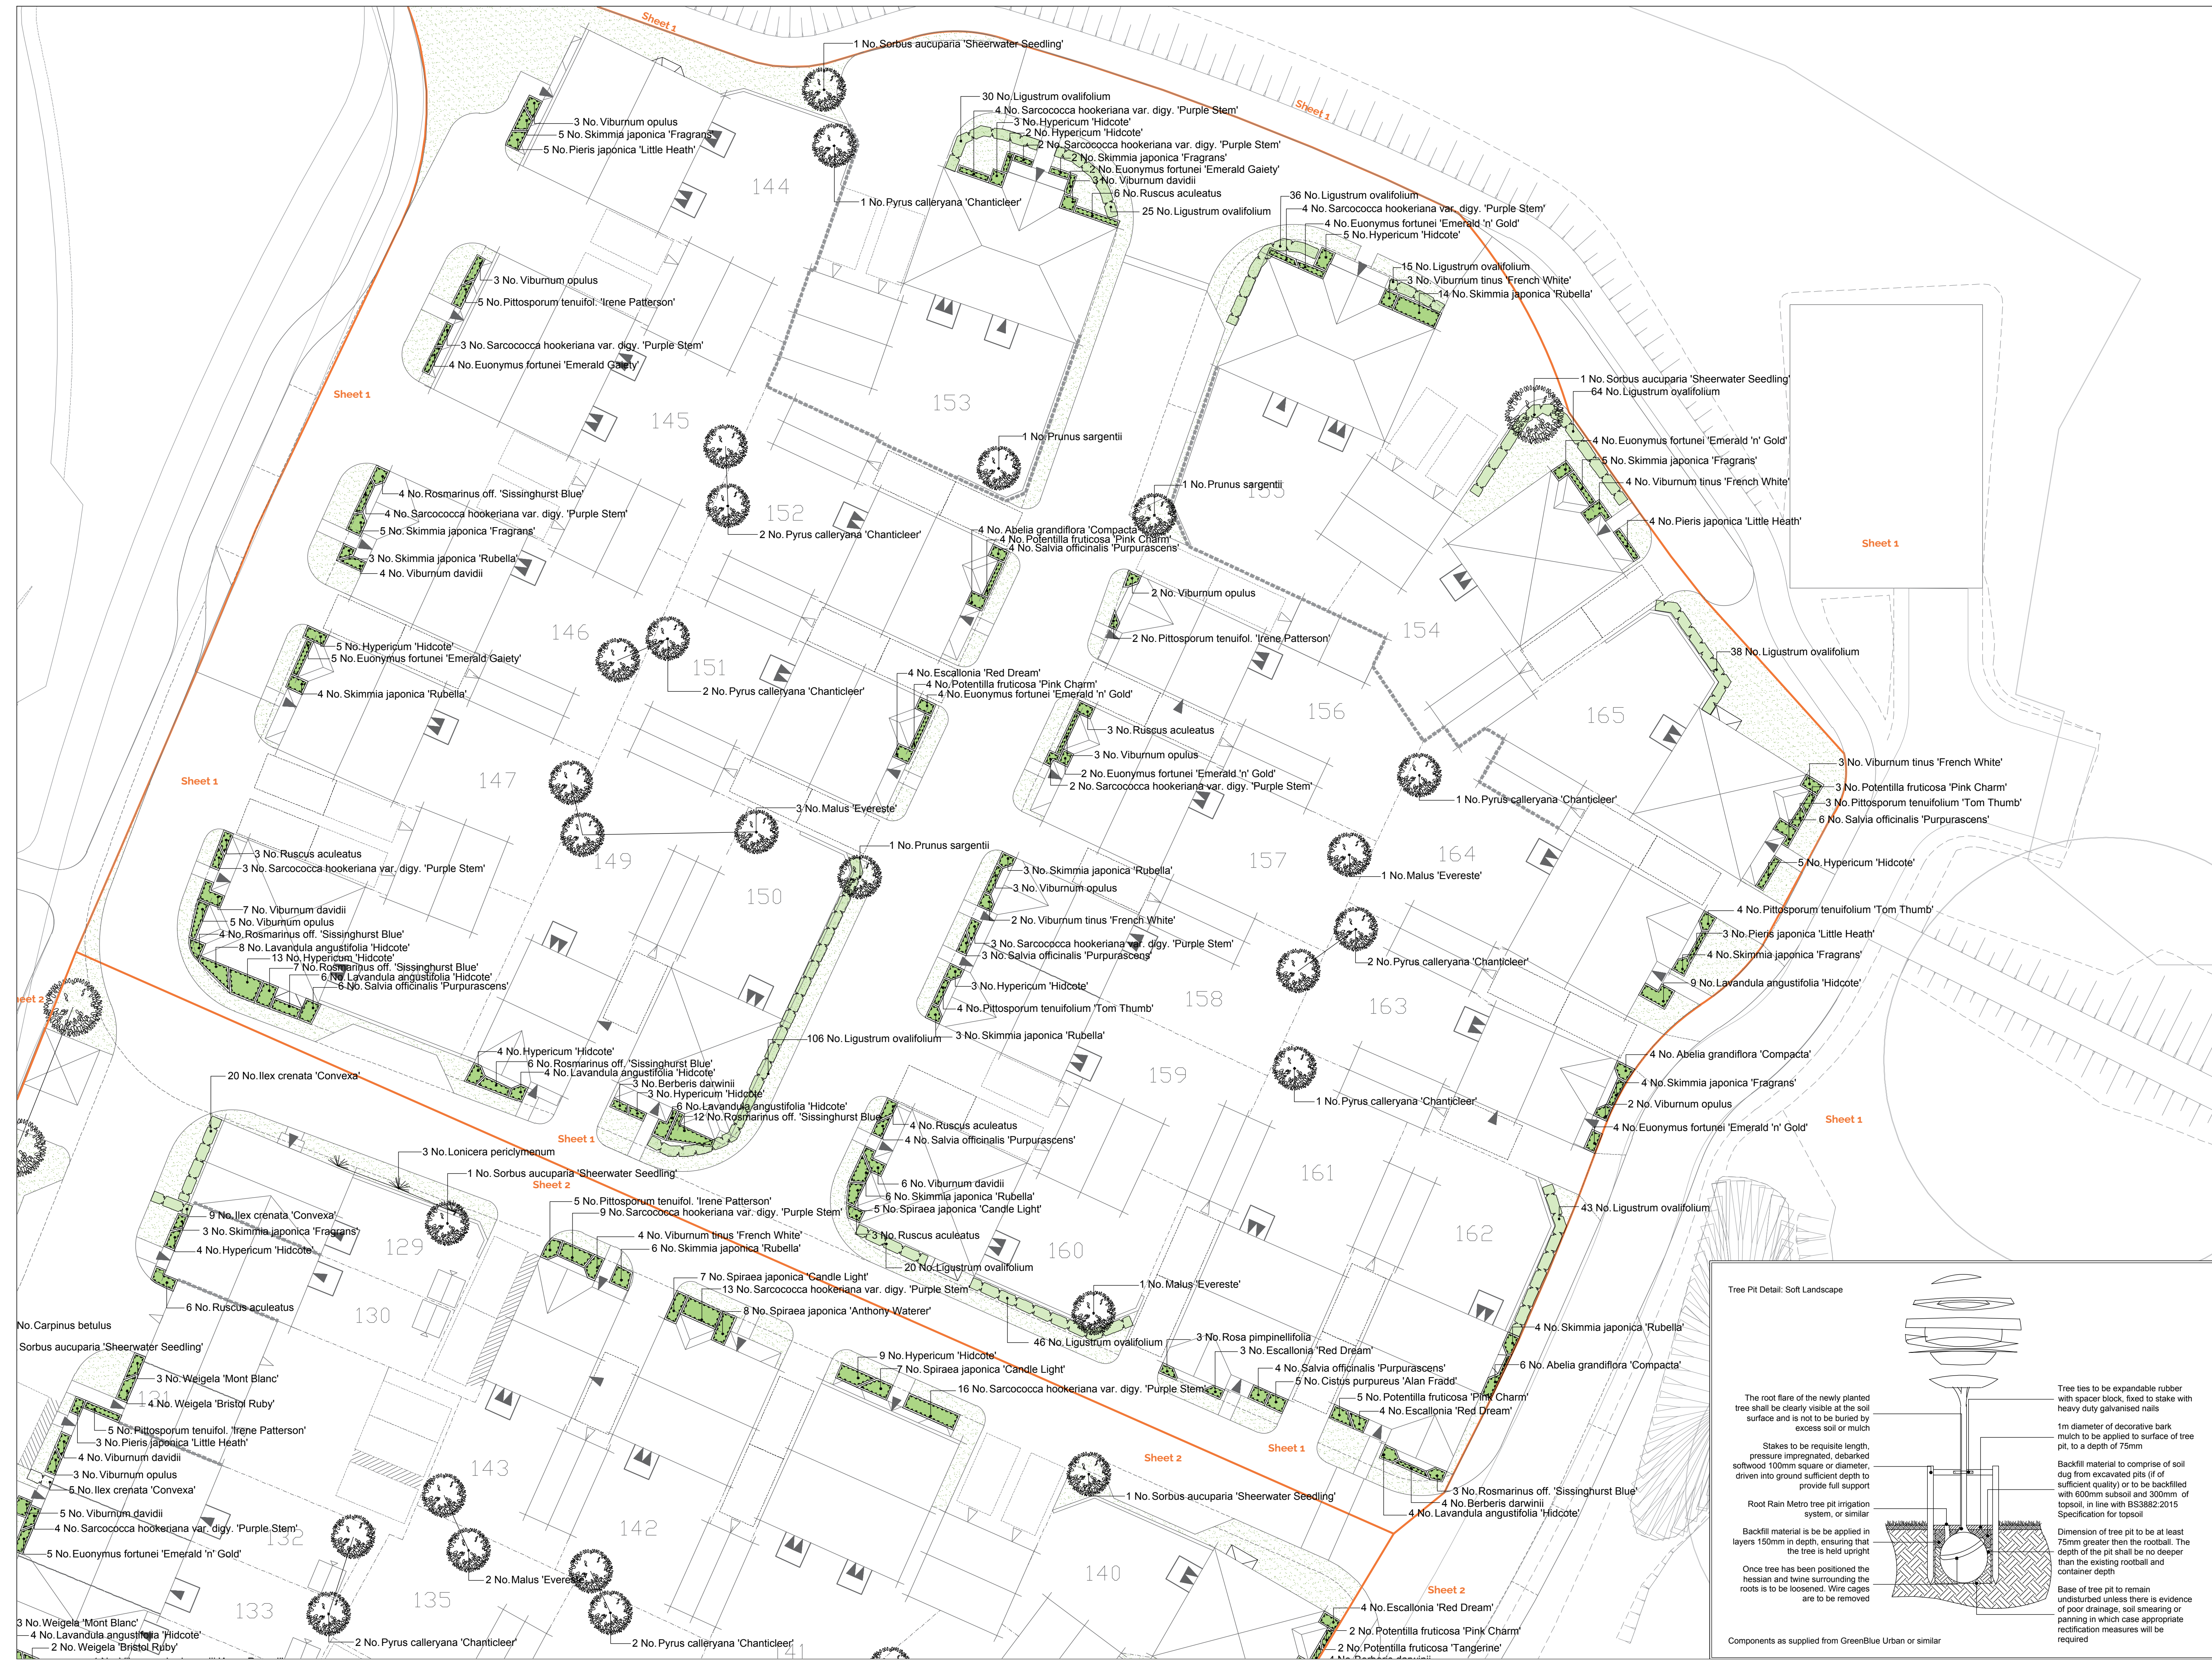

SPECIFICATION
All works generally, to comply with the written Soft Landscape Specification.

NOTES:
DO NOT SCALE FROM DRAWING
NOT FOR CONSTRUCTION, FOR PLANNING PURPOSES ONLY

Legend

- Proposed tree planting within soft landscape. See detail.
- Proposed Ligustrum (privet) hedge planting to be planted in a double staggered row 300mm apart and at 600mm centres in each row. To be maintained at 1m height
- Proposed hedge planting to be planted in a single row at 300mm centres. Maintained at 600mm height
- Proposed shrub planting to receive 75mm bark mulch after planting operations
- Proposed grass areas to receive good quality amenity grass turves laid in line with good horticultural practices
- Cut lines
- Proposed climbing plants to be trained up adjacent wall/ fence/pergola with galvanised wires and hook set 250mm apart with support canes removed prior to planting

Rev Date Details Drawn

ACD ENVIRONMENTAL
HEAD OFFICE
Rodbourne Rail Business Centre, Grange Lane,
Malmesbury, SN16 0ES
Tel: 01666 825646
Courtyard House, Mill Lane, Godalming, GU7 1EY
Tel: 01483 425714
Suite 6, Crescent House, Yonge Close, Eastleigh, SO50 9SX
Tel: 02382 026300
email: mail@acdenv.co.uk
www.acdenvironmental.co.uk

BOVIS HOMES
scheme: Boorley Green
Botley
client: Bovis Homes
drawing: Landscape Proposals
date: November 2018
scale: 1:200@A1
drawing no: BOV22193 Sheet 1
drawn: SC checked: JS

Copyright of ACD Environmental Ltd. All rights described in Chapter IV of the Copyright, Designs and Patents Act 1988 have been generally asserted. 2011. Copyright of this plan remains with ACD until all fees have been paid in full.

Tree Pit Detail: Soft Landscape

The root flare of the newly planted tree shall be clearly visible at the soil surface and is not to be buried by excess soil or mulch

Stakes to be requisite length, pressure impregnated, debarked softwood 100mm square or diameter, driven into ground sufficient depth to provide full support

Root Rain Metro tree pit irrigation system, or similar

Backfill material is to be applied in layers 150mm in depth, ensuring that the tree is held upright

Once tree has been positioned the hessian and twine surrounding the roots is to be loosened. Wire cages are to be removed

Tree ties to be expandable rubber with spacer block, fixed to stake with heavy duty galvanised nails

1m diameter of decorative bark mulch to be applied to surface of tree pit, to a depth of 75mm

Backfill material to comprise of soil dug from excavated pits (if of sufficient quality) or to be backfilled with 600mm subsoil and 300mm of topsoil, in line with BS3882:2015 Specification for topsoil

Dimension of tree pit to be at least 75mm greater than the rootball. The depth of the pit shall be no deeper than the existing rootball and container depth

Base of tree pit to remain undisturbed unless there is evidence of poor drainage, soil smearing or panning in which case appropriate rectification measures will be required

Components as supplied from GreenBlue Urban or similar