


The wood or metal pile, iron rail and attached ring are the property of the Licensor **NOTE: Additional works or fastenings must not be affixed to the Pile, Iron, or ring**

Pontoon eyebolts, sub-frame & cleats must be secure and in a serviceable condition. Floats must be securely fastened, complete (casings undamaged) & offer sufficient stability.


Chain between 17mm – 22mm (recommended 19mm) – Chain must be of adequate length to allow for all state of tides.

There **must** only be four (4) compliant shackles on the pile ring (i.e. two pontoon chain connections & a single safety line for each vessel sharing the mooring) Secure shackle pins with quality UV resistant CABLE TIES – DO NOT use Stainless steel wire
Replace any shackle where wear is greater than 50%
Do not loop chain around ring or secure with rope directly to ring.

Pile Safety Line –
spliced polyester line min 16mm & a metal thimble (NOT stainless steel)

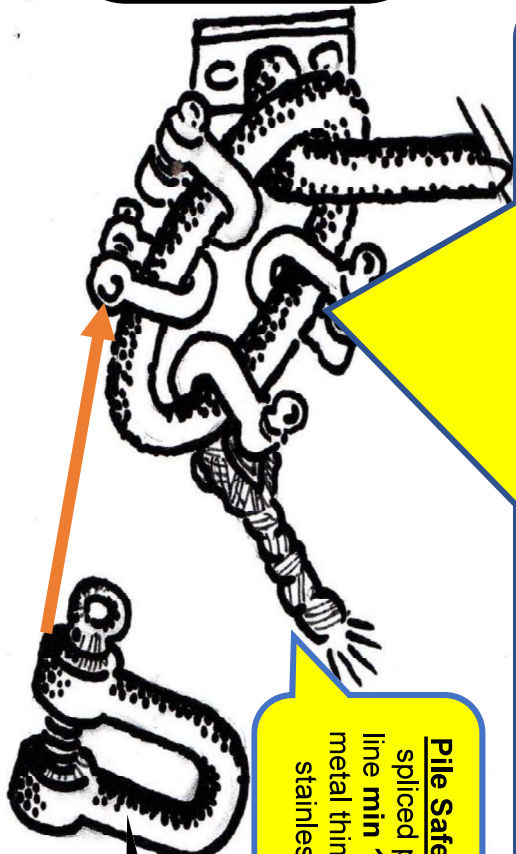

Larger shackle BS 22x25mm required to connect to pile ring



Decking must be secure and free from rot. Regular cleaning should be carried out to prevent slip hazards.
Nothing to be stored on or fixed to the pontoon (including Tenders, Wind Generators or Solar Panels)

Shackles Approved BS 19x22mm

Links must be replaced if more than 50% worn