


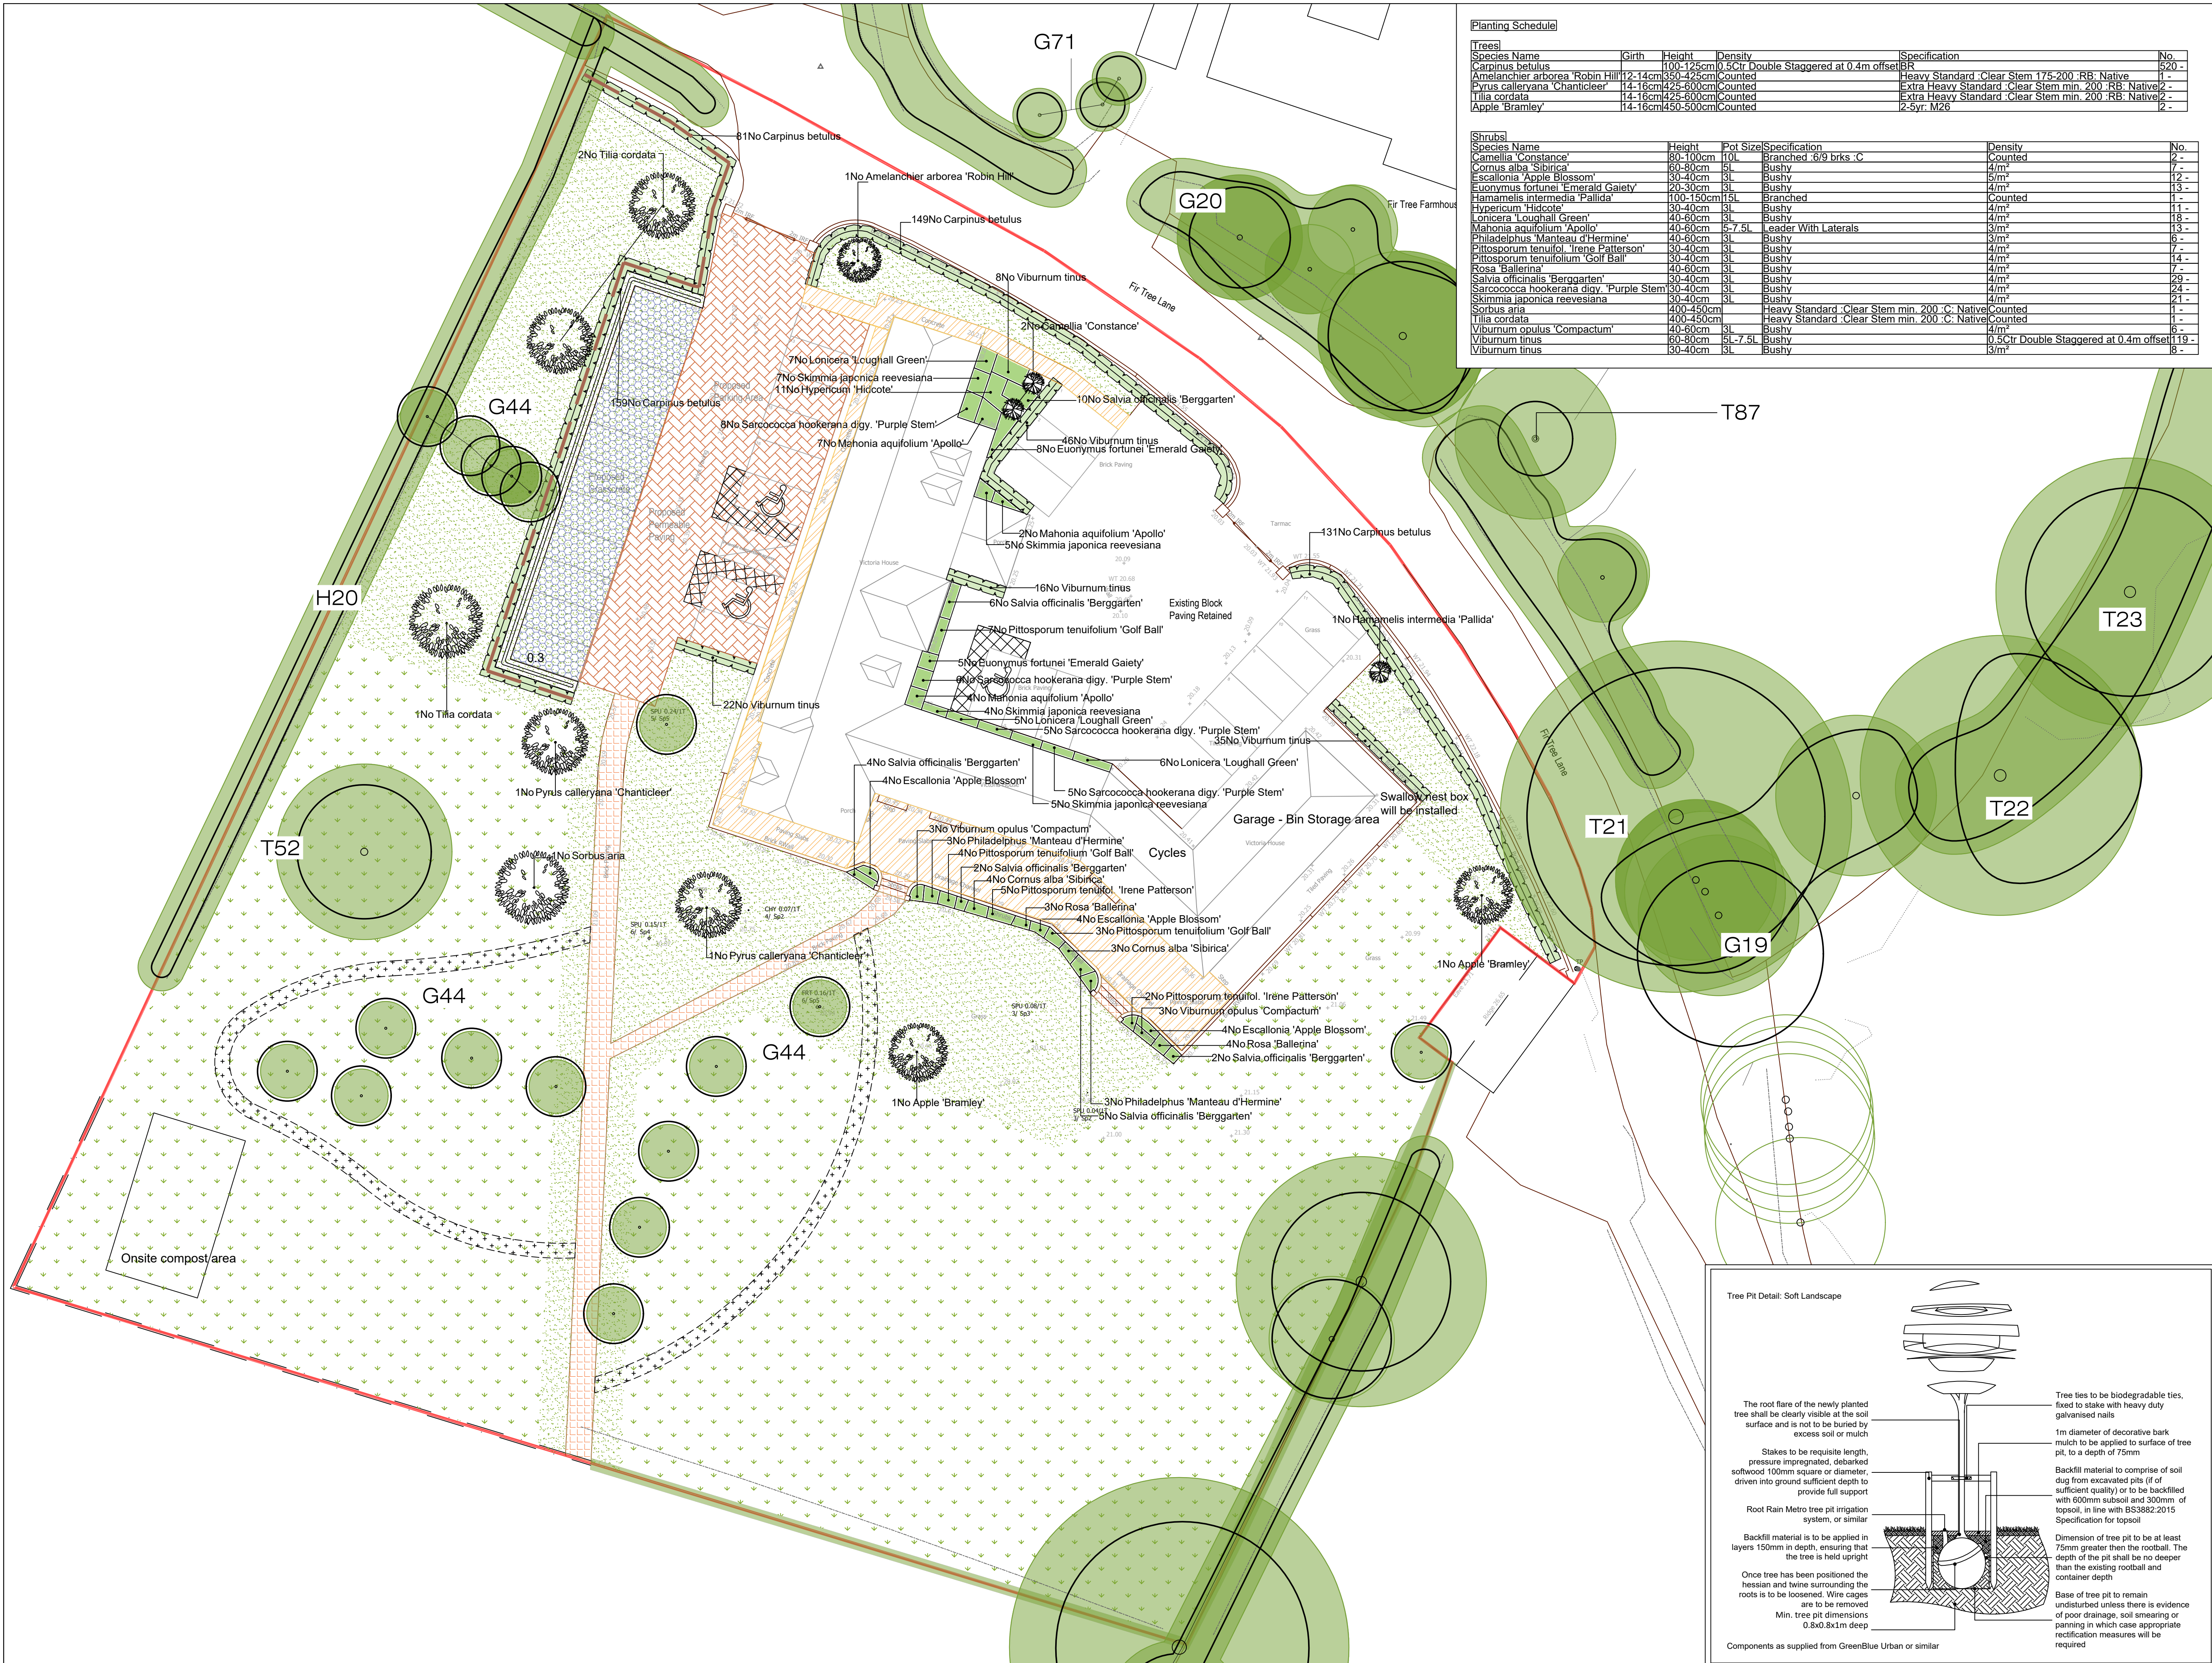

Planting Schedule					
Trees					
Species Name	Girth	Height	Density	Specification	No.
Carpinus betulus	100-125cm	0.5Ctr	Double Staggered at 0.4m offset	1	520
Amelanchier arborea 'Robin Hill'	12-14cm	350-425cm	Counted	Heavy Standard 'Clear Stem 175-200 'RB: Native	1
Pyrus calleryana 'Chanticleer'	14-16cm	425-600cm	Counted	Extra Heavy Standard 'Clear Stem min. 200 'RB: Native	2
Tilia cordata	14-16cm	425-600cm	Counted	Extra Heavy Standard 'Clear Stem min. 200 'RB: Native	2
Apple 'Bramley'	14-16cm	450-500cm	Counted	2-syr. M26	2
Shrubs					
Species Name	Height	Pot Size	Specification	Density	No.
Camellia 'Constance'	80-100cm	10L	Branched 6/9 brks :C	Counted	2
Cornus alba 'Sibirica'	60-80cm	5L	Bushy	4/m²	7
Escallonia 'Apple Blossom'	30-40cm	3L	Bushy	5/m²	12
Euonymus fortunei 'Emerald Gaiety'	20-30cm	3L	Bushy	4/m²	13
Hamamelis intermedia 'Pallida'	100-150cm	15L	Branched	Counted	1
Hypericum 'Hidcote'	30-40cm	3L	Bushy	4/m²	11
Lonicera 'Loughall Green'	40-60cm	3L	Bushy	4/m²	18
Mahonia aquifolium 'Apollo'	40-60cm	3L	Leader With Laterals	3/m²	13
Philadelphus 'Manteau d'Hermine'	40-60cm	3L	Bushy	3/m²	6
Pittosporum tenuifolium 'Irene Patterson'	30-40cm	3L	Bushy	4/m²	7
Pittosporum tenuifolium 'Golf Ball'	30-40cm	3L	Bushy	4/m²	14
Rosa 'Ballerina'	40-60cm	3L	Bushy	4/m²	7
Salvia officinalis 'Berggarten'	30-40cm	3L	Bushy	4/m²	29
Skimmia japonica reevesiana	30-40cm	3L	Bushy	4/m²	24
Sorbus aria	400-450cm	Heavy Standard	'Clear Stem min. 200 'C: Native	Counted	1
Tilia cordata	400-450cm	Heavy Standard	'Clear Stem min. 200 'C: Native	Counted	1
Viburnum opulus 'Compactum'	40-60cm	3L	Bushy	4/m²	6
Viburnum tinus	60-80cm	5L-7.5L	Bushy	0.5Ctr Double Staggered at 0.4m offset	119
Viburnum tinus	30-40cm	3L	Bushy	3/m²	8

SPECIFICATION
All works generally, to comply with the written Soft Landscape Specification.

NOTES:
DO NOT SCALE FROM DRAWING
NOT FOR CONSTRUCTION, FOR PLANNING PURPOSES ONLY

Legend

- Existing trees to be retained and protected during construction
- Proposed tree planting within soft landscape. All new trees in grass must have a strimmer guard. All trees within grassed areas should receive a 75mm deep bark mulch, 1m diameter circle around. See detail on sheet Proposed specimen shrub planting to receive short angular staking on half standards with expandable tree ties.
- Proposed Carpinus (hornbeam) hedge planting to be planted in a double staggered row 300mm apart and at 400mm centres in each row. To be maintained at 1m height
- Proposed shrub planting to receive 75mm bark mulch after planting operations
- Existing grass to be retained. Any bare patches to receive good quality amenity grass turves laid in line with good horticultural practices
- Proposed wildflower grassland areas, to be seeded with WFG18 'Butterfly and Honeybee' seed mix as supplied by Germinal Seeds and sown at 5 grams per msq, or similar and approved.
- Proposed Mown Grass Path, where bare patches are to be seeded with EM2 Mixture as supplied by Emorsgate and sown at 4 grams per msq, or similar and approved
- Priora permeable paving in brindle laid in herringbone pattern natural color blocks. Laid in line with engineer's details.
- Grass grid reinforcement to be honeycomb from COREgravel or similar
- Proposed private footpaths to house bound buff gravel or similar. Laid to engineer's details.
- Saxon concrete paving slabs 450x450mm in buff laid in stack bond from Marshalls or similar and approved. Laid in line with engineer's details.
- 0.9m High Driven Post & 3 Strained Wire Fence down center line of hedging

Tree Pit Detail: Soft Landscape

The root flare of the newly planted tree shall be clearly visible at the soil surface and is not to be buried by excess soil or mulch

Slakes to be requisite length, pressure impregnated, detailed softwood 100mm square or diameter, driven into ground sufficient depth to provide full support

Root Rain Metro tree pit irrigation system, or similar

Backfill material is to be applied in layers 150mm in depth, ensuring that the tree is held upright

Once tree has been positioned the hessian and twine surrounding the roots is to be loosened. Wire cages are to be removed

Min. tree pit dimensions 0.8x0.8x1m deep

Components as supplied from GreenBlue Urban or similar

Tree ties to be biodegradable ties, fixed to stake with heavy duty galvanised nails

1m diameter of decorative bark mulch to be applied to surface of tree pit, to a depth of 75mm

Backfill material to comprise of soil dug from excavated pits (if of sufficient quality) or to be backfilled with 600mm subsoil and 300mm of topsoil, in line with BS3882:2015 Specification for topsoil

Dimension of tree pit to be at least 75mm greater than the rootball. The depth of the pit shall be no deeper than the existing rootball and container depth

Base of tree pit to remain undisturbed unless there is evidence of poor drainage, soil smearing or panning in which case appropriate rectification measures will be required

A	19.07.22	Client comments	RP
Rev	Date	Details	Drawn

ACD ENVIRONMENTAL

HEAD OFFICE
Rodbourne Rail Business Centre, Grange Lane,
Malmesbury, SN16 0ES
Tel: 01666 825646

4 & 5 The Old Mill, Fry's Yard, Bridge Street,
Codalming, CU7 1HP
Tel: 01485 425714

Suite 6, Crescent House, Yonge Close,
Eastleigh, SO50 9SX
Tel: 02382 026300

email: mail@acdenv.co.uk
www.acdenvironmental.co.uk

scheme: Victoria House
Horton Heath
client: Eastleigh Borough Council
drawing: Landscape Proposals
date: July 2022
scale: 1:200@A1
drawing no: EB22850 11
drawn: LS checked: DKM

Copyright of ACD Environmental Ltd. All rights described in Chapter IV of the Copyright, Designs and Patents Act 1988 have been generally asserted. 2011. Copyright of this plan remains with ACD until all fees have been paid in full.