



NOTES

1. Existing levels based on topographical information.

2. Proposed levels based on designs submitted for planning.

3. Underbuild an level of 0mm is taken to be 150mm below FFL

4. Retaining wall heights shown are above finished ground level and height is shown on the low side of the wall.

LEGEND


UNDERBUILD

RETAINING WALL (450mm or higher above ground)

W 0.5m

W 0.3m

Wall (450mm or lower above ground)

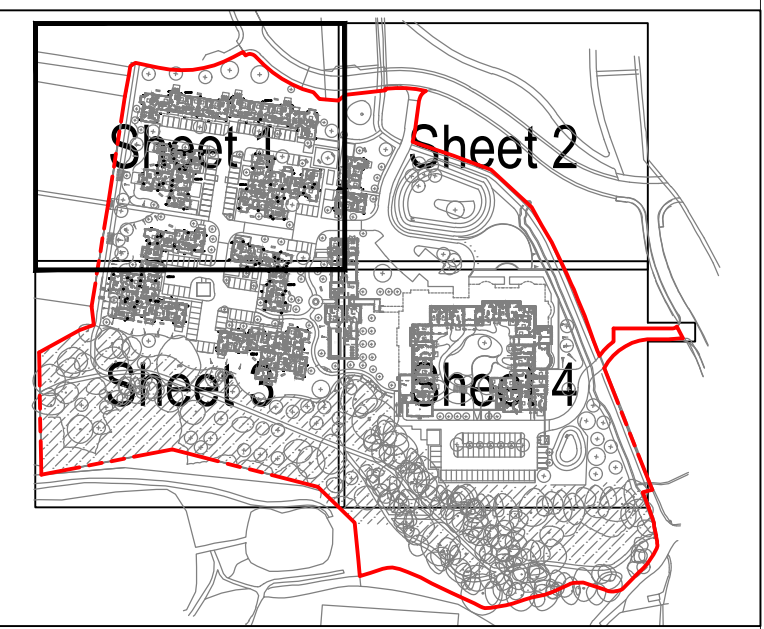

|                                                                                  |          |              |            |      |
|----------------------------------------------------------------------------------|----------|--------------|------------|------|
| T1                                                                               | 30.06.22 | Tender issue | JPH        | RL   |
| Rev                                                                              | Date     | Description  | By         | Apvd |
| PROJECT:<br>CCRC STONEHAM                                                        |          |              |            |      |
| TITLE:<br>EXTERNAL WORKS<br>SHEET 1                                              |          |              |            |      |
| CLIENT:<br>MEEDHURST PROJECT MANAGEMENT                                          |          |              |            |      |
| SCALE@A1:<br>1:500                                                               |          |              |            |      |
| PROJECT REF:<br>22133                                                            |          |              |            |      |
| DRAWING No:<br>JUBB_XX_XX_DR_C_0601                                              |          |              | REV:<br>T1 |      |
| Revision Referencing<br>P = Preliminary A = Approval T = Tender C = Construction |          |              |            |      |