


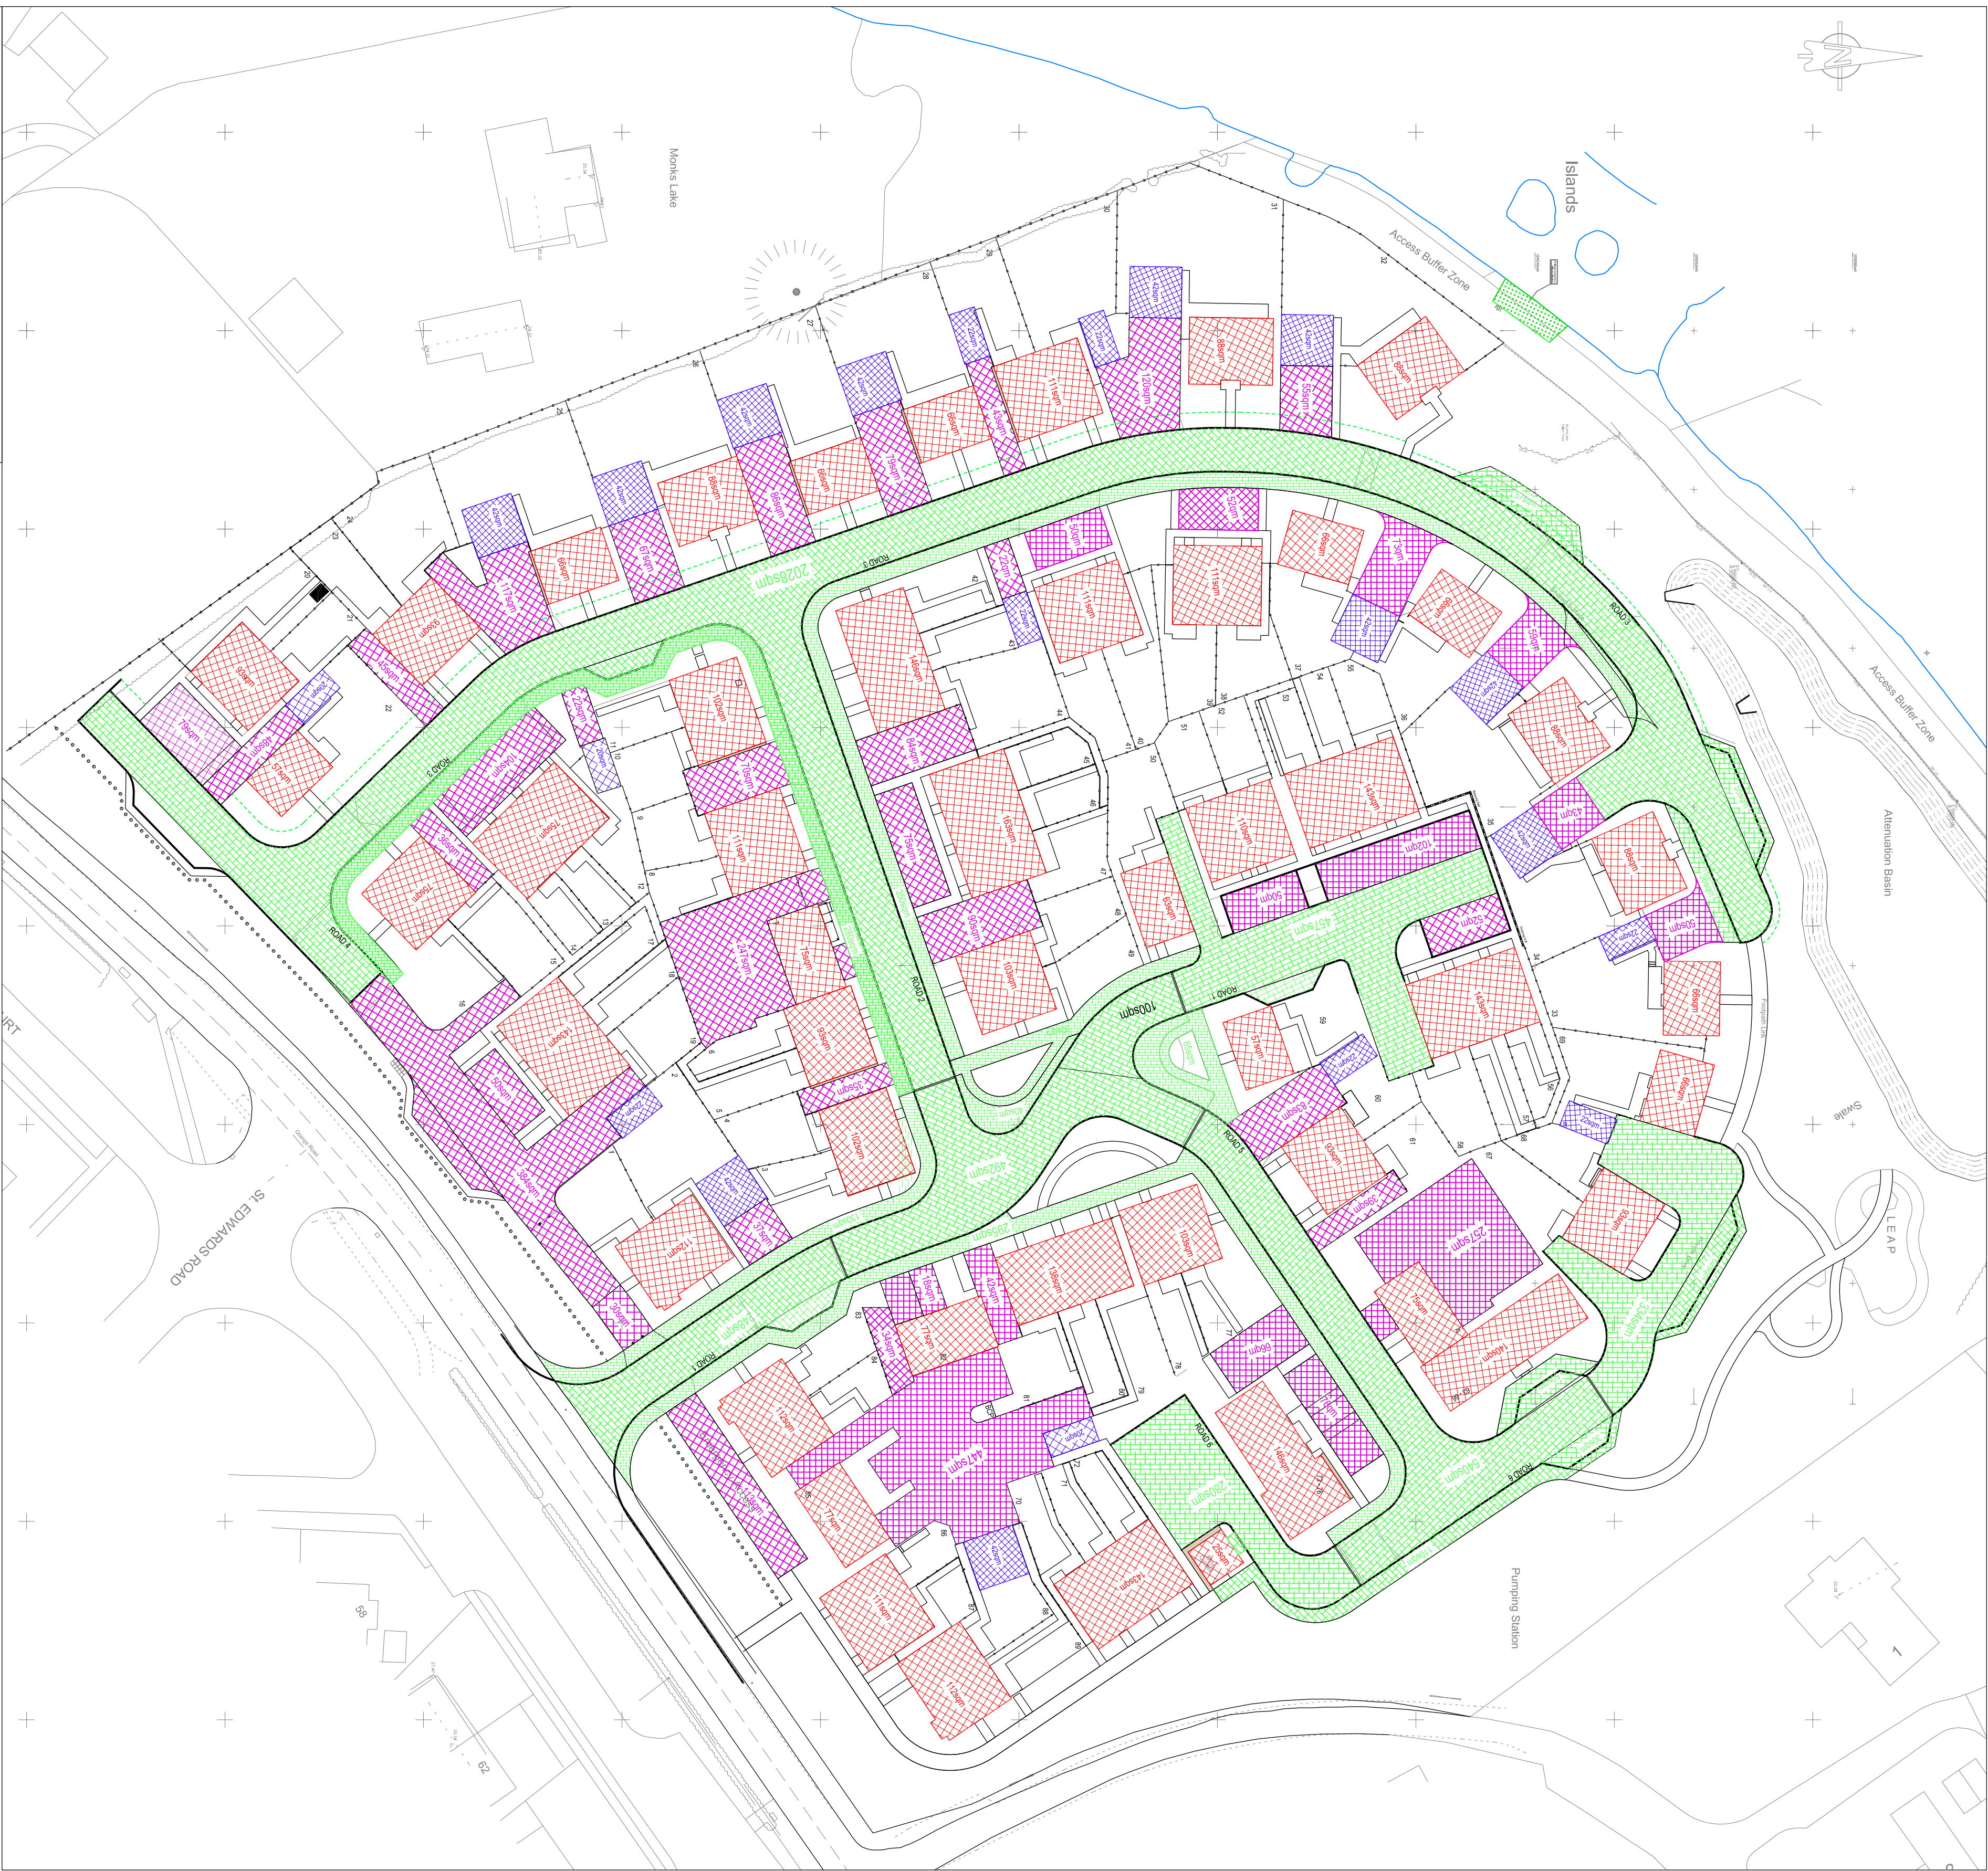

Key: Drained Areas- West Draining to Pond

623sqm	275m²	Carriageway construction
352sqm	2226m²	Drives construction
240sqm	528m²	Garages
158sqm	2226m² + 10% UC = 2452m²	Drained area from properties and garages

Total Area = 7759m²

Key: Drained Areas- East to Swale A

623sqm	2471m²	Carriageway construction
352sqm	1242m²	Drives construction
240sqm	148m²	Garages
158sqm	1746m² + 10% UC = 1920m²	Drained area from properties

Total Area = 5781m²

Key: Drained Areas- East to Swale B

623sqm	0m²	Carriageway construction
352sqm	0m²	Drives construction
240sqm	22m²	Garages
158sqm	88m² + 10% UC = 97m²	Drained area from properties

Total Area = 119m²

Key: Drained Areas to Central Attenuation

623sqm	622m²	Carriageway construction
352sqm	204m²	Drives construction
240sqm	0m²	Garages
158sqm	459m² + 10% UC = 505m²	Drained area from properties

Total Area = 1331m²

B	10.01.23	Areas re-configured	KN
A	30.11.22	First Issue	KN
Rev	Date	Details	Notes

FOR INFORMATION

Project
GRANGE ROAD
NETLEY

Client





KAZYS NARBUTAS
CONSULTING
Civil Engineering Consultancy
Unit 410, Banger Industrial Estate, Gwentville Road, Banger, Wales, NP23 5BE
Telephone: 01495 223196 Email: kazy@kazys-consult.co.uk

Drawing Title			
Engineering Details			
Drained Areas			
Drawn	Checked	Scale	Page Size
KN		1:500	A1
30.11.22	13.10.22	Drawing No.	Revision
KN/C2/114	500-02		B