

PAC-IF013B-E R410A

Air Handling Unit Controller

Mr. SLIM™

The Air Handling Unit Controller can interface Mitsubishi Electric Mr Slim outdoor units to third party air handling units.

Up to six Mr Slim outdoor units can be used on a single air handling unit providing a wide range of heating and cooling capacities.



Key Features & Benefits:

- Simpler installation with Mr Slim being a single source of heating and cooling BEMS external monitoring and control can be achieved through direct Modbus, digital switches or analogue input
- Intelligent Multiple Outdoor Unit Control (IMOU) of up to six Mr Slim outdoor units when operated in external manual control, this can include two different capacities or a series of Mr Slim outdoor units
- Anti-cycling measures incorporated into the design to extend the life of the outdoor units
- Capacity control of up to 11 individual steps ensures high comfort levels
- SD card installed to record history and facilitate software upgrades
- Maximum airflow of up to 5 x standard Mr Slim specification
- Complete AHU systems incorporating this pre-installed controller are also available



Air Conditioning Product Information

PAC-IF013B-E R410A

Air Handling Unit Controller




CONTROLLER		PAC-IF013B-E
DIMENSIONS (mm)	Width x Depth x Height	336 x 69 x 278
WEIGHT (kg)		2.5
CONTROL OPTIONS	Automatic	Remote Controller Set
	Manual Input	Modbus
		0-10V
		1-5V
		4-20mA
		0-10kΩ

OUTDOOR UNIT(S)		PUHZ-ZRP 35VKA	PUHZ-ZRP 50VKA	PUHZ-ZRP 60VKA	PUHZ-ZRP 71VKA	PUHZ-ZRP 100VKA2/YKA2	PUHZ-ZRP 125VKA2/YKA2	PUHZ-ZRP 140VKA2/YKA2	PUHZ-ZRP 200VKA	PUHZ-ZRP 250VKA	PHZ-P 200VKA	PHZ-P 250VKA
CAPACITY (kW)	Heating (nominal)	4.1	6	7	8	11.2	14	16	22.4	27	22.4	27
	Cooling (nominal)	3.5	5	6	7.1	10	12.5	14	20	25	20	25
WEIGHT (kg)		43	46	70	67	116 / 123	116 / 125	118 / 131	135	135	127	135
DIMENSIONS (mm)	Width x Depth x Height	809 x 300 x 630	809 x 300 x 630	950 x 330 x 943	950 x 330 x 943	1050 x 330 x 1338	1050 x 330 x 1338	1050 x 330 x 1338	1050 x 330 x 1338	1050 x 330 x 1338	1050 x 330 x 1338	1050 x 330 x 1338
SOUND PRESSURE LEVEL (dBA)	Heating / Cooling	46 / 44	46 / 44	48 / 47	48 / 47	51 / 49	52 / 50	52 / 50	62 / 59	62 / 59	60 / 58	62 / 59
		12.7 (1/2")	12.7 (1/2")	15.88 (5/8")	15.88 (5/8")	15.88 (5/8")	15.88 (5/8")	15.88 (5/8")	28.58 (1 1/8")	28.58 (1 1/8")	28.58 (1 1/8")	28.58 (1 1/8")
PIPE SIZE (mm) (in)	Gas	6.35 (1/4")	6.35 (1/4")	9.52 (3/8")	9.52 (3/8")	9.52 (3/8")	9.52 (3/8")	9.52 (3/8")	9.52 (3/8")	9.52 (3/8")	9.52 (3/8")	9.52 (3/8")
	Liquid	6.35 (1/4")	6.35 (1/4")	9.52 (3/8")	9.52 (3/8")	9.52 (3/8")	9.52 (3/8")	9.52 (3/8")	9.52 (3/8")	9.52 (3/8")	9.52 (3/8")	9.52 (3/8")
HEAT EXCHANGER REQUIREMENTS	Max Volume (dm ³)	>30m pipe run	1.05	1.5	1.8	2.13	3	3.75	4.2	6	7.5	7.5
		20m pipe run	1.35	1.8	2.7	3.03	3.9	4.65	5.1	7.8	9.3	7.8
		10m pipe run	1.65	2.1	3.6	3.93	4.8	5.55	6	9.6	11.1	9.6
	Min Volume (dm ³)		0.35	0.5	0.6	0.71	1	1.25	1.4	2	2.5	2
	Header Diameter (mm)	Max	3/4"	3/4"	3/4"	3/4"	1 1/8"	1 1/8"	1 1/8"	1 1/8"	1 1/8"	1 1/8"
	Pressure (MPa)	Design	4.15	4.15	4.15	4.15	4.15	4.15	4.15	4.15	4.15	4.15
	Burst		> 12.45	> 12.45	> 12.45	> 12.45	> 12.45	> 12.45	> 12.45	> 12.45	> 12.45	> 12.45

Notes: One air handling unit controller is required per outdoor unit. Cooling: Indoor 27°C DB/19°C WB, Outdoor 35°C DB/24°C WB. Heating: Indoor 20°C DB, Outdoor 7°C DB/6°C WB.

EXAMPLE:

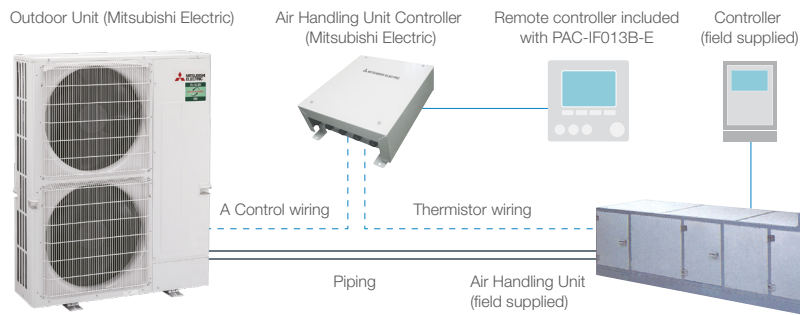

Notes:

One air handling unit controller is required per heat exchanger. If using more than one air handling unit controller on a single AHU, there are two options:

1. Connect 1 x PAC-IF013B-E unit per heat exchanger - these will operate as separate circuits with a controller on each which is included.
2. Connect 1 x PAC-IF013B-E for the first heat exchanger, then up to 5 additional slave PAC-SIF013B-E units. The included controller with the PAC-IF013B-E will additionally control the slave units

For further information of this feature please consult your local sales office.


PAC-IF013B-E DIMENSIONS

For product dimensions please visit:

https://library.mitsubishielectric.co.uk/pdf/book/2020_Product_Catalogue#page-87



Telephone: 01707 282880
email: air.conditioning@meuk.mee.com
les.mitsubishielectric.co.uk



UNITED KINGDOM Mitsubishi Electric Europe Living Environment Systems Division, Travellers Lane, Hatfield, Hertfordshire, AL10 8XB, England. Telephone: 01707 282880 Fax: 01707 278881
IRELAND Mitsubishi Electric Europe, Westgate Business Park, Ballymount, Dublin 24, Ireland. Telephone: (01) 419 8800 Fax: (01) 419 8890 International code: (003531)

Country of origin: United Kingdom - Japan - Thailand - Malaysia. ©Mitsubishi Electric Europe 2020. Mitsubishi and Mitsubishi Electric are trademarks of Mitsubishi Electric Europe B.V. The company reserves the right to make any variation in technical specification to the equipment described, or to withdraw or replace products without prior notification or public announcement. Mitsubishi Electric is constantly developing and improving its products. All descriptions, illustrations, drawings and specifications in this publication present only general particulars and shall not form part of any contract. All goods are supplied subject to the Company's General Conditions of Sale, a copy of which is available on request. Third-party product and brand names may be trademarks or registered trademarks of their respective owners.

Note: The fuse rating is for guidance only. Please refer to the relevant databook for detailed specification. It is the responsibility of a qualified electrician/electrical engineer to select the correct cable size and fuse rating based on current regulation and site specific conditions. Mitsubishi Electric's air conditioning equipment and heat pump systems contain a fluorinated greenhouse gas, R410A (GWP:2088), R32 (GWP:675), R407C (GWP:1774), R134a (GWP:1430), R513A (GWP:831), R454B (GWP:466), R1234ze (GWP:7) or R1234yf (GWP:4). *These GWP values are based on Regulation (EU) No 517/2014 from IPCC 4th edition. In case of Regulation (EU) No.626/2011 from IPCC 3rd edition, these are as follows. R410A (GWP:1975), R32 (GWP:550), R407C (GWP:1650) or R134a (GWP:1300).

Effective as of September 2020

