
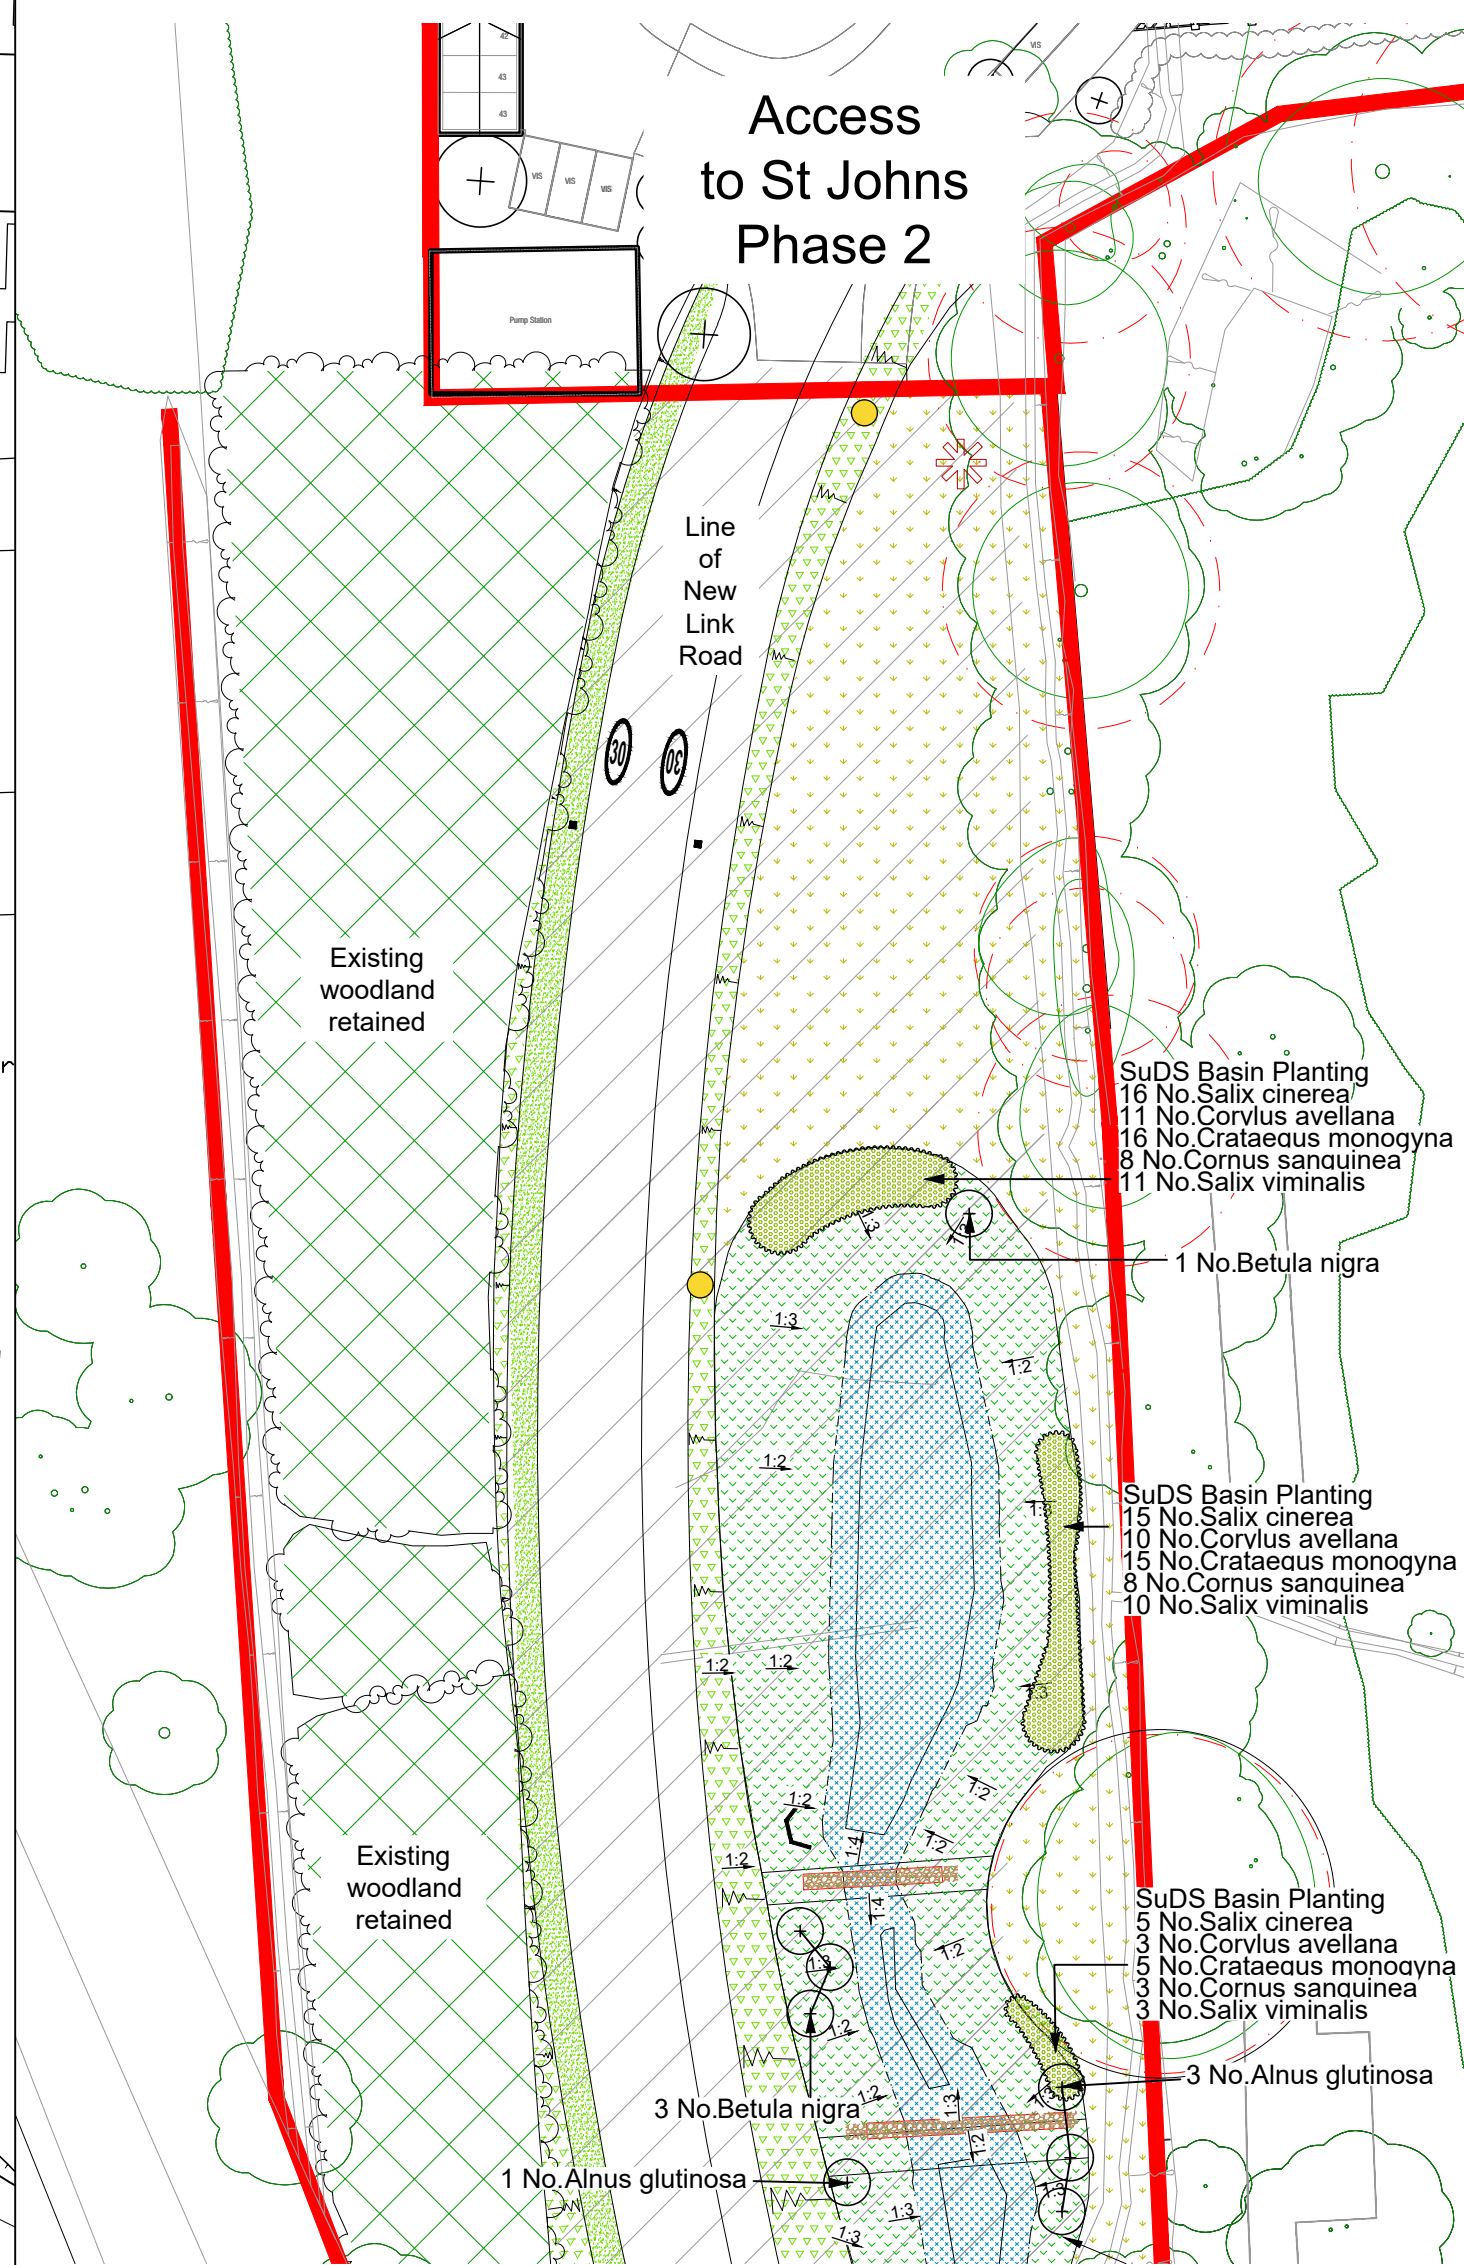


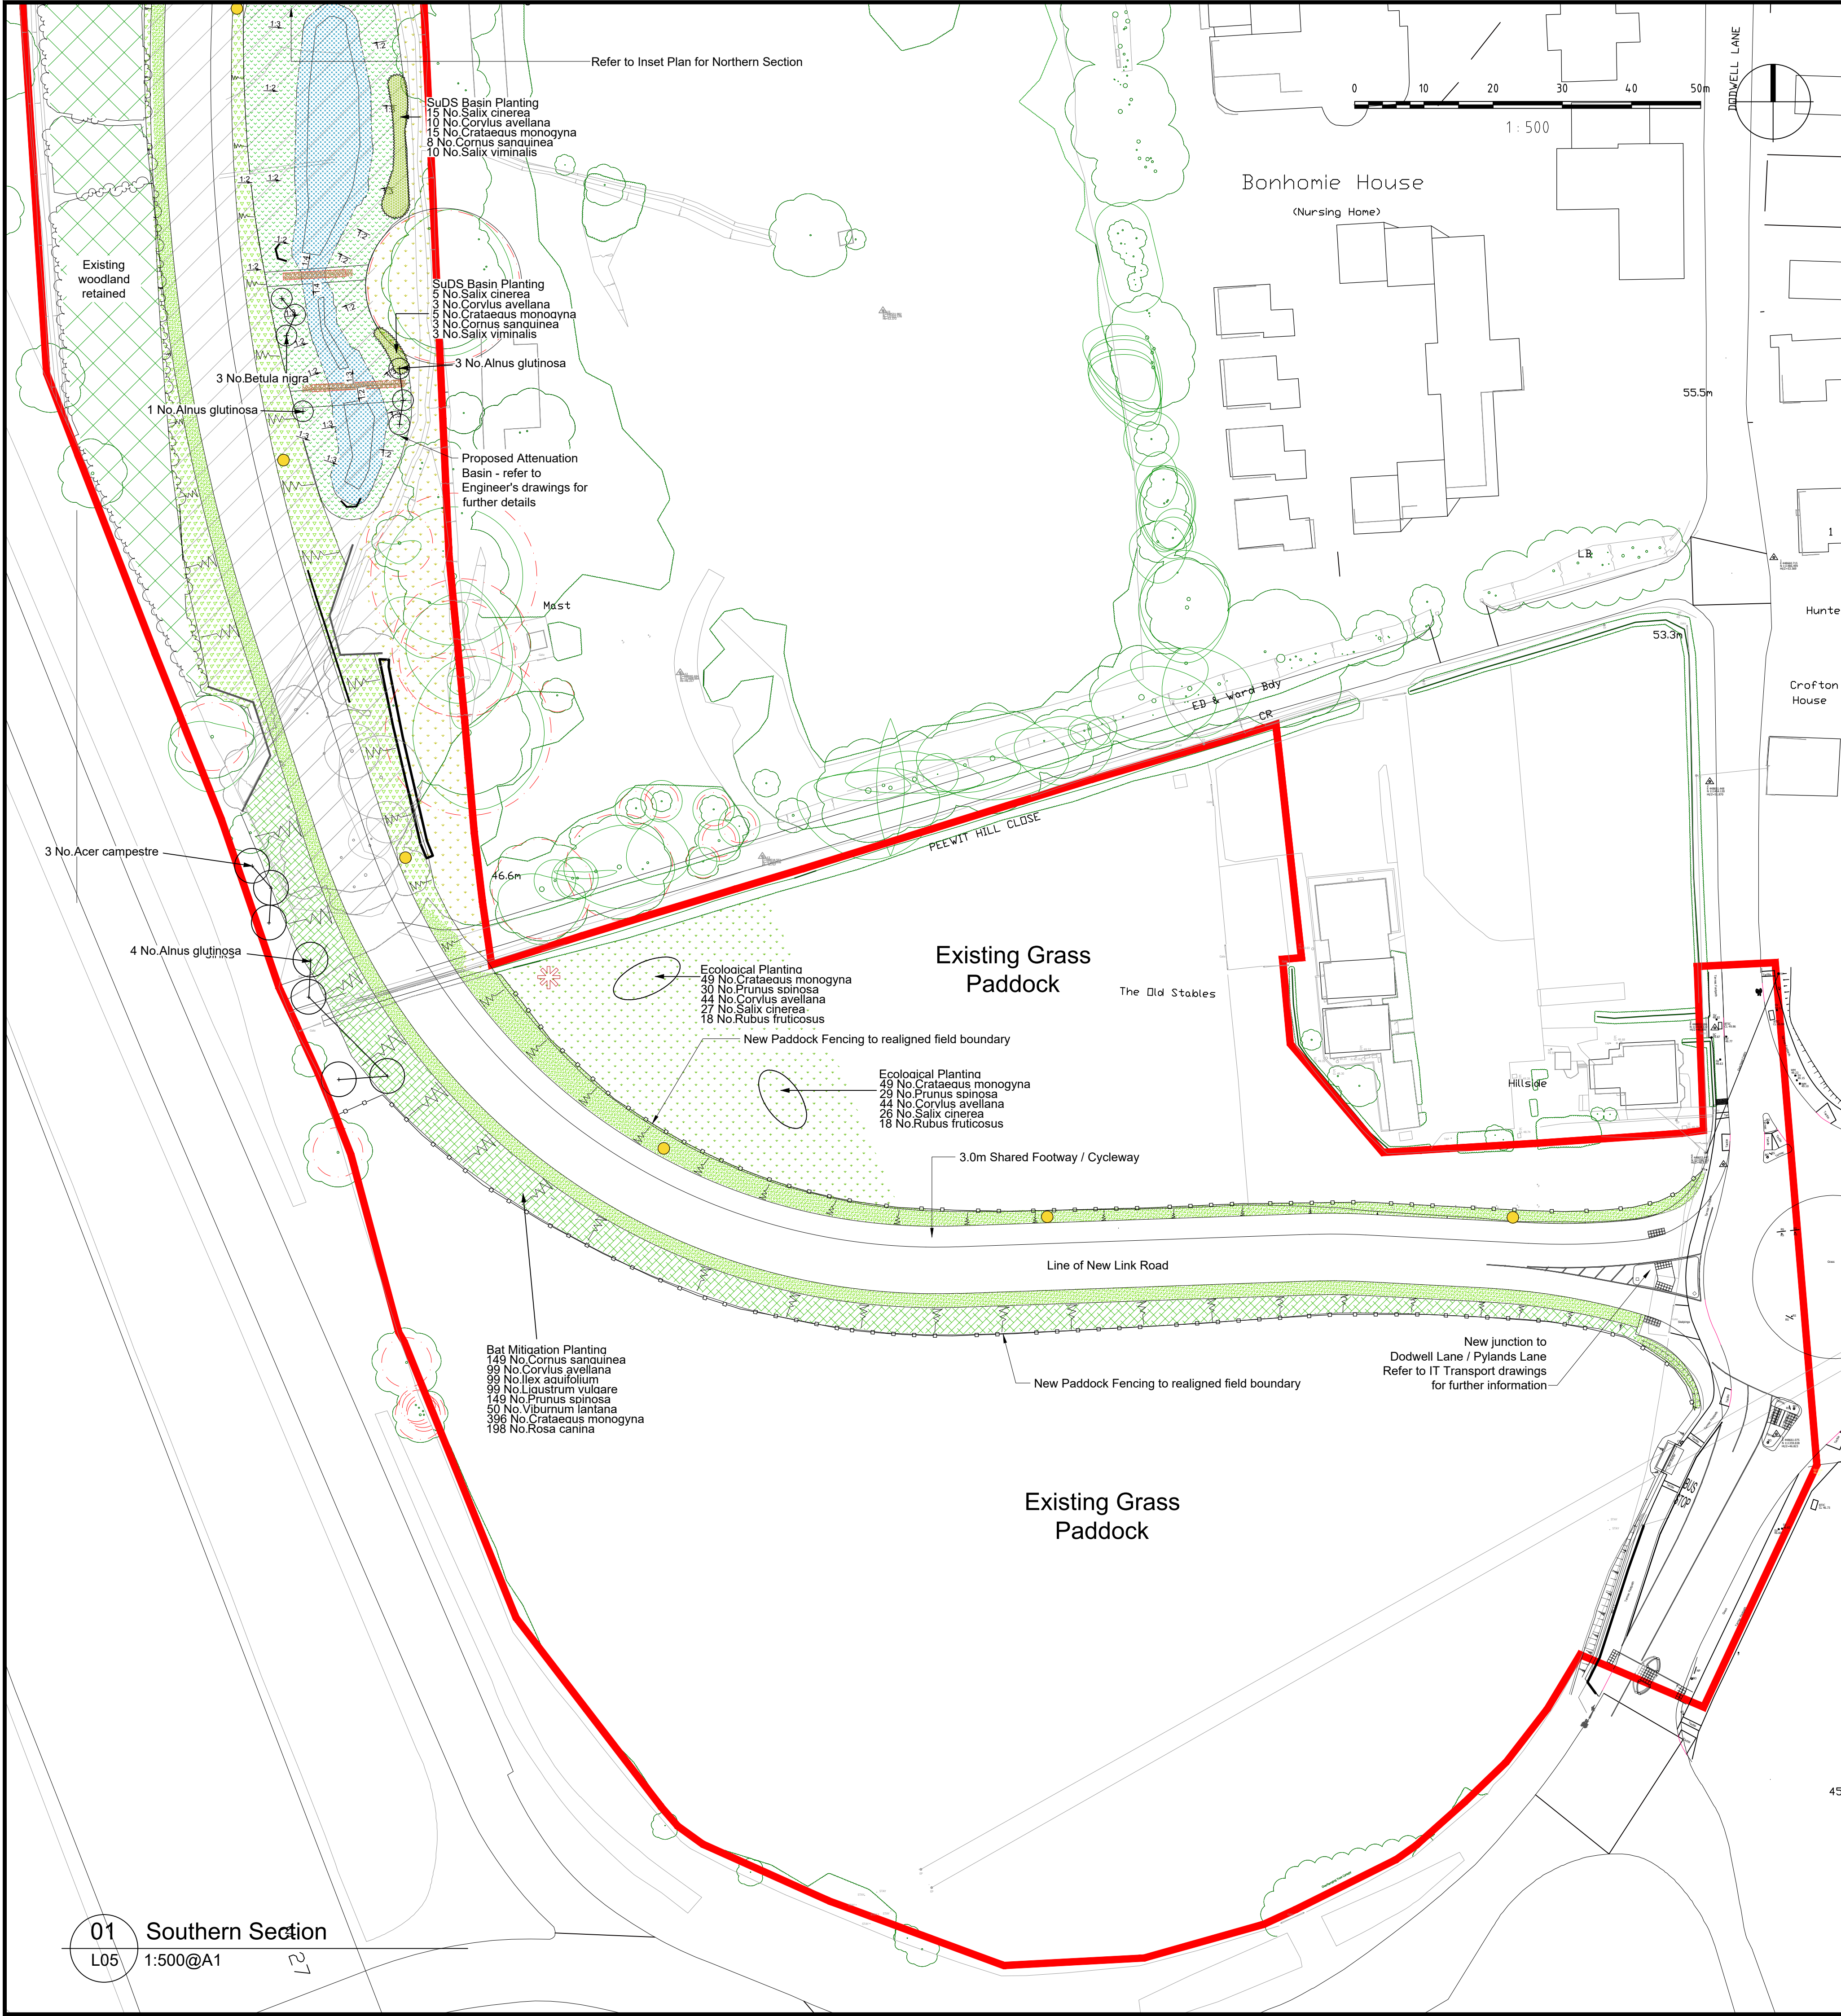

DD130 New Link Road Planting Schedule

Trees						
No.	Species Name	Common Name	Specification	Density	Girth	Height
3 No.	Acer campestre	Common Maple	Extra Heavy Standard :RB	Counted	14-16cm	
4 No.	Alnus glutinosa	Common Alder	BR	Counted	12-14cm	
4 No.	Alnus glutinosa	Common alder	Feather :RB	Counted	12-14cm	
4 No.	Betula nigra	River Birch	BR	Counted	12-14cm	
36 No.	Crataegus monogyna	Common Hawthorn	Whip :SuDS Basin Planting	2/m ²		80-100cm
98 No.	Crataegus monogyna	Common Hawthorn	BR :Ecological Planting	5/m ²		
396 No.	Crataegus monogyna	Common Hawthorn	Whip :Buffer Planting	2/m ²		80-100cm
99 No.	Ilex aquifolium	Common Holly	Whip :Buffer Planting	1/m ²		60-90cm
59 No.	Prunus spinosa	Sloe	BR :Ecological Planting	5/m ²		
24 No.	Salix viminalis		Whip :SuDS Basin Planting	1/m ²		
Total :727 No.						

Shrubs (Plant in random groups of 1,3,5 and 7's)						
No.	Species Name	Common Name	Specification	Density	Pot Size	Height
19 No.	Cornus sanguinea	Common Dogwood	Whip :SuDS Basin Planting	1/m ²		80-100cm
149 No.	Cornus sanguinea	Common Dogwood	Whip :Buffer Planting	1/m ²		80-100cm
24 No.	Corylus avellana	Common Hazel	Whip :SuDS Basin Planting	1/m ²		60-80cm
88 No.	Corylus avellana	Common Hazel	BR :Ecological Planting	5/m ²		
99 No.	Corylus avellana	Common Hazel	Whip :Buffer Planting	1/m ²		60-80cm
99 No.	Ligustrum vulgare	Common Privet	Whip :Buffer Planting	1/m ²		60-80cm
149 No.	Prunus spinosa	Blackthorn	Whip :Buffer Planting	1/m ²		80-100cm
198 No.	Rosa canina	Don Rose	Whip :Buffer Planting	2/m ²		60-80cm

Outline Landscape Specification

Implementation

All planting to be carried out at appropriate time within the first planting season post completion and maintained for a period of up to 5 years to ensure successful establishment. Recommended planting times.

- Wildflower Meadow mixes - First sow (April to June) / Secondary (August - September)
- Container Grown Planting - All year round (except during periods of frosts)
- Bareroot/Rootball Stock - November (After first frost) - March

It is the contractor's responsibility to check for services in this area before groundworks commence.

Growing Medium

Existing topsoil, ripped to a depth of 300mm, the full remaining depth replaced with BS 3882 imported topsoil supplemented with PAS100 compost of spent mushroom compost at a depth of 50mm. Topsoil should be friable.

Trees and shrubs to be grown in accordance with NPS.

Trees - tree pits to be 300mm larger than the rootball on all sides with the base of the pit broken up. All trees to be double staked.

Planting Shrubs - to be planted in prepared beds, back filled and firmed to nursery level. After planting all trees and shrubs are to be well watered, lightly firmed, mulched with 50mm of FSC certified medium grade mulch ensuring no damage to the plants.

Rabbit proof fencing maybe required to protect the establishment of the tree and shrub planting. Contractor to advise on site.

Hedgerows / Bat Mitigation Planting - Once established the maintenance for hedgerows/bat mitigation planting should be carried out on 3-year rotation (each side and top in successive years) to provide a continuous supply of flowers, fruit and seeds to be available for wildlife.

NOTES:

1. This drawing is to be read in conjunction with all relevant contract drawings and specifications with any conflicting information to be brought to the attention of Deacon Design before works commence on site.

2. Do not scale from this drawing, always work to noted dimensions.

3. All given dimensions in mm.

KEY

Application Site boundary

Soft Landscape

Existing woodland vegetation to be retained
Hoglat Hedgehog Homes provision within the retained woodland areas to the west of the link road - refer to ecologist's report for further details

Existing woodland vegetation to be removed

Existing tree to be retained. Redline denotes Root Protection Area (RPA) to be read in accordance with Sapling Arboriculture Report Tree Report

Proposed Native Tree Planting
Nest boxes provision within retained trees - refer to ecologist's report for further details

Bat Mitigation Planting in accordance with Ecologist's recommendations

Existing managed Grassland (G4) to be retained in accordance with Ecologist's recommendations

Existing Rush Pasture Habitat (F2b) to be retained in accordance with Ecologist's recommendations

Proposed General Purpose Meadow Mixture to highway verge / Service margin / Grass Paddock reinstatement. Emorsgate EM2 or similar approved

Proposed Woodland Edge mixture to earthworks outside of service margin against retained woodland Emorsgate EH1 or similar and approved

Proposed water meadow mix to basin banks - Emorsgate EM8 Meadow Mixture for wetlands or similar and approved.

1 No. Corsica insects lodges to be installed adjacent to the SuDS feature - refer to ecologist's report for further details

Proposed wildflower mixture to basin bottom - Emorsgate EP1 Pond edge Mixture or similar and approved with additional marginal planting (subject to Engineer's confirmation on water levels)

Indicative proposed shrub planting mix to basin banks

Boundary Treatments

1.2m high post 'n' Rail paddock Fencing to realigned grass paddocks

Lighting

Proposed lighting column (indicative location) - refer to Engineer's drawings for further details

Ecological Enhancements

Approximate location of proposed Hibernacula - refer to Ecologist's report for further details

FINAL

28.02.23	GT	Basin amendments and Ecological recommendations	D	MM
24.01.23	PD	Bat Mitigation / Hedge Management added	C	PD
21.09.18	PD	Bat Mitigation Planting Added	B	PD
17.09.18	PD	Realigned Link Road / Attenuation / Paddock Fencing	A	PD

DATE	DRAWN	DESCRIPTION OF REVISION	REVISION LETTER	CHECKED BY
------	-------	-------------------------	-----------------	------------

DRAWING STATUS

FOR PLANNING



DEACON DESIGN

Landscape Architecture | Masterplanning | Urban Design
Furzehall Farm, Wickham Road, Fareham PO16 7JH
Tel: 01329 279 067 Email: info@deacondesign.co.uk
Copyright Deacon Design 2016

PROJECT TITLE:

St Johns Phase 3, New Link Road
Foreman Homes Group

PROJECT NUMBER:

DD130

PLOT DATE:

22.08.2017

DRAWING SCALE:

1:500

APPROVED BY:

PD

PAPER SIZE:

A1

DRAWN BY:

PM

DRAWING TITLE:

Landscape Proposals Plan

-

-

DRAWING NUMBER:

DD130L05

REVISION LETTER:

D

DRAWING FILE LOCATION:
Z:\Dropbox (Deacon Design Ltd)\03 PROJECTS 100+DD130 St Johns Ph2, Hedge End\04-Drawings\Autocad\Landscape Design\DD130L05_Spine Road Landscape Plan.dwg