

**BOORLEY GREEN DEVELOPMENT
PHASE 2 (NON-RESIDENTIAL),
BOORLEY GREEN, HAMPSHIRE**

**UPDATED PRE-DEVELOPMENT
ARBORICULTURAL SURVEY**

A Report to: Luken Beck MDP Ltd

Report No: RT-MME-129668-01

Date: January 2019



Triumph House, Birmingham Road, Allesley, Coventry CV5 9AZ

Tel: 01676 525880 Fax: 01676 521400

E-mail: admin@middlemarch-environmental.com Web: www.middlemarch-environmental.com

REPORT VERIFICATION

This study has been undertaken in accordance with British Standard 5837:2012 "*Trees in Relation to Design, Demolition and Construction - Recommendations*".

Report Version	Date	Completed by:	Checked by:	Approved by:
Final	15/01/2019	Fiona Shuttle BSc (Arboricultural Project Officer)	Dr Katy Read CEnv, CEcol, MCIEEM, MCIWEM, C.WEM DipSM (Executive Director)	Dr Philip Fermor CEnv, MCIEEM (Managing Director)

DISCLAIMER

The contents of this report are the responsibility of Middlemarch Environmental Ltd. It should be noted that, whilst every effort is made to meet the client's brief, no site investigation can ensure complete assessment or prediction of the natural environment.

Middlemarch Environmental Ltd accepts no responsibility or liability for any use that is made of this document other than by the client for the purposes for which it was originally commissioned and prepared.

VALIDITY OF DATA

The findings of this study are valid for a period of 12 months from the date of survey. If works have not commenced by this date, an updated site visit should be carried out by a suitably qualified and experienced arboriculturist to assess any changes to the trees, groups and hedgerows on site and to inform a review of the conclusions and recommendations made.

It should be noted that trees are dynamic living organisms that are subject to natural changes as they age or are influenced by changes in their environment. As such following any significant meteorological event or changes in the growing environment of the trees they should be re-assessed by a suitably qualified and experienced arboriculturist.

NON-TECHNICAL SUMMARY

Middlemarch Environmental Ltd was commissioned to undertake an updated Pre-development Arboricultural Survey of a site at Boorley Green in Botley, Hampshire. It is understood that the site will be the subject of a planning application for the construction of the Boorley Green Gateway Centre. To fulfil the project brief, a desk study and a field survey of the trees present on site were undertaken in November 2018.

The desk study exercise identified that none of the trees present on site are protected by a Tree Preservation Order. Additionally, this exercise established that the site is not situated within a Conservation Area.

Mark Kirk FdSc Arboriculture (Arboricultural Consultant) undertook the field survey in November 2018. The survey identified that the site contains a number of mature trees adjacent to Winchester Road which are predominantly in a good or fair condition.

The most significant trees recorded within the survey included three mature Oaks within a larger row of trees adjacent to Winchester Road on the western boundary of the site. These specimens were considered to be high retention value due to their age, good condition and prominence. A number of additional Oaks within the row were also identified as being moderate retention value however, these trees showed signs of dieback or old pruning wounds that reduced their overall value and condition.

The remaining trees identified within the survey were considered to be of a lower retention value as they were less significant in the local landscape and offer limited likely future potential, typically due to poor pruning in the past and presence of deadwood.

To ensure the protection of trees selected for retention during the course of the proposed development it is recommended that the guidance set out in Section 5 of this report is considered and that, during development of the site, the retained trees are protected by the erection of tree protection barriers to the specification set out in BS5837:2012.

CONTENTS

1. INTRODUCTION	4
1.1 PROJECT BRIEF.....	4
1.2 SITE DESCRIPTION	4
2. METHODOLOGY	5
2.1 DESK STUDY	5
2.2 CONDITION STATUS	5
2.3 ROOT PROTECTION AREA (RPA)	5
3. RESULTS.....	6
3.1 DESK STUDY	6
3.2 WEATHER CONDITIONS AND PERSONNEL.....	6
3.3 SURVEY RESULTS	6
3.4 ROOT PROTECTION AREA (RPA)	9
4. DISCUSSION	10
4.1 DESK STUDY	10
4.2 TREE QUALITY.....	10
5. ARBORICULTURAL DESIGN GUIDANCE	13
5.1 THE TREE CONSTRAINTS PLAN	13
5.2 TREE RETENTION / REMOVAL	13
5.3 BELOW GROUND CONSTRAINTS	13
5.4 ABOVE GROUND CONSTRAINTS.....	14
6. RECOMMENDATIONS.....	16
7. DRAWINGS.....	17
REFERENCES AND BIBLIOGRAPHY.....	19

1. INTRODUCTION

1.1 PROJECT BRIEF

Luken Beck MDP Ltd commissioned Middlemarch Environmental Ltd to undertake a Pre-development Arboricultural Survey of trees growing on land at, and adjacent to, Boorley Green in Botley, Hampshire. It is understood that the proposed development of the site includes the construction of the Boorley Green Gateway Centre.

A previous arboricultural survey of the wider Boorley Green site was undertaken in January 2012 by Barrell Tree Consultancy. The primary aim of this survey was to identify the trees that had not been previously identified and update the condition status of all trees present.

The purpose of this report is to:

- Record the current condition of the trees found on the site and categorise them using criteria outlined in BS5837:2012 "*Trees in Relation to Design, Demolition and Construction - Recommendations*".
- Provide a Tree Constraints Plan that identifies any constraints to development presented by the trees to include root protection areas for the retained trees as described in BS5837:2012.
- Provide guidance detailing arboricultural constraints to development and factors to be considered during the detailed design of the proposed development.

1.2 SITE DESCRIPTION

The wider Boorley Green development site consists of a former golf course, covering an area of 71 hectares that includes retained water features, undulating ground, sand bunkers and a mix of hard and soft landscaping, rest areas, footpaths and routes for motorised golf carts.

The topography of the site is undulating with small lakes and water features interspersed amongst vegetative features. There is a significant high-point towards the southern section of the site that overlooks the remainder of the former golf course. Scattered trees, hedgerows, groups of trees and a number of woodlands are present across the site forming significant landscape features.

The section of the site under consideration within this report, the Boorley Green Gateway Centre site, is an irregularly shaped parcel of land of approximately 2.6 ha in size which is located in the north-eastern section of the wider Boorley Green development site at Ordnance Survey Grid Reference SU 5047 1506.

The Boorley Green Gateway Centre site has boundaries with Winchester Road to the west, the Botley Park Hotel to the south and with the wider Boorley Green development site to the north and east.

The location of the trees surveyed can be found on Middlemarch Environmental Ltd Drawing Number C129668-01-01, contained within Section 7 of this report.

2. METHODOLOGY

2.1 DESK STUDY

A desk study was undertaken to identify if any of the trees present within or in close proximity to the site are covered by Tree Preservation Orders (TPOs) or if the site is situated within a Conservation Area. This involved consultation with the Local Planning Authority.

Additionally, an online search using the Multi Agency Geographical Information for the Countryside (MAGIC) website for statutory conservation sites was undertaken to determine the presence of any ancient woodlands that have been recorded within a 15m radius of the site.

2.2 CONDITION STATUS

To determine the status of the trees within the site a full arboricultural survey has been undertaken, assessing the species and status of all trees present. This survey has been carried out in accordance with British Standard 5837:2012 '*Trees in Relation to Design, Demolition and Construction – Recommendations*'.

All trees have been assigned a unique reference number. Individual trees above 75 mm in diameter (at 1.5 m above ground level) have had their position plotted to a survey drawing. The trees were visually assessed and a schedule prepared listing: tree number, species, trunk diameter at 1.5 m above ground level (or in accordance with Annex C of BS5837:2012), tree height, crown spread (cardinal points), crown clearance (cardinal points), height of first branch and growth direction, age class and estimated remaining life expectancy in years. Measurements for tree height, first branch height, crown clearance and crown spread were taken to an accuracy of 0.5 m. Stem diameter measurements were recorded to the nearest 10 mm. Any specific observations or recommendations with regard to management were also noted. All these observations and measurements are summarised in Section 3.3.

Each tree was assessed and assigned to one of the following categories:

- Category A: Those trees of high quality and value with an estimated remaining life expectancy of at least 40 years.
- Category B: Those trees of moderate quality and value with an estimated remaining life expectancy of at least 20 years.
- Category C: Those trees of low quality and value with an estimated remaining life expectancy of at least 10 years or young trees with a stem diameter below 150 mm.
- Category U: Trees in such a condition that they cannot realistically be retained as living trees in the context of the current land use for longer than 10 years.

Categories A, B and C have further sub-categories with regards to the reasons for tree retention:

- 1: Mainly arboricultural qualities.
- 2: Mainly landscape qualities.
- 3: Mainly cultural values, including conservation.

2.3 ROOT PROTECTION AREA (RPA)

In order to avoid damage to the roots or rooting environment of retained trees, the RPA has been calculated for each of the Category A, B and C trees. This is a minimum area around a tree which is deemed to contain sufficient roots and rooting volume to maintain the tree's viability. Protection of the roots and soil structure in this area should be treated as a priority.

These figures have been calculated utilising the formulas within Section 4.6 and Annex D of British Standard 5837:2012.

3. RESULTS

3.1 DESK STUDY

Eastleigh Borough Council confirmed by email on 2nd November 2018 that there are no trees with Tree Preservation Orders (TPOs) within the site. However, a woodland and three individual trees located in proximity to the site, within the wider Boorley Green site to the south of the area under consideration are subject to TPOs.

An internet search using the online mapping provided by Eastleigh Borough Council (<https://www.eastleigh.gov.uk/council/interactive-maps-of-the-borough>) also confirms that the study area is not situated within a Conservation Area.

Reference to the Multi Agency Geographical Information for the Countryside (MAGIC) website indicates that no ancient woodland sites have been recorded within a 15m radius of the survey area.

3.2 WEATHER CONDITIONS AND PERSONNEL

The survey was completed on the 8th November 2018 by Mark Kirk, Arboricultural Consultant. The weather conditions at the time of the survey are shown in Table 3.1.

Conditions	Result
Temperature (°C)	9
Cloud Cover (%)	70
Precipitation	Nil
Wind Speed (Beaufort)	F1

Table 3.1: Weather Conditions at Time of Survey

3.3 SURVEY RESULTS

Tree species recorded during the survey are listed in Table 3.2.

Common Name	Scientific Name
Eucalyptus	<i>Eucalyptus gunnii</i>
Hornbeam	<i>Carpinus betulus v Fastigiata</i>
Lombardy poplar	<i>Populus nigra Italica</i>
Monterey cypress	<i>Cupressus macrocarpa</i>
Oak	<i>Quercus robur</i>
Poplar	<i>Populus sp.</i>

Table 3.2: Tree Species Recorded During Survey

The full results of the Arboricultural Assessment are detailed in Table 3.3.

Tree No.	Species	No. Stems	Diam (mm)	H't (m)	Branch Spread (m)				Min Crown Clearance (m)	Age	Vigour	Struc Cond	Cat	Comments	Preliminary Management Recommendations
					N	E	S	W							
H170	Hawthorn	-	<u>200</u>	<u>2</u>	<u>1.0</u>	<u>1.0</u>	<u>1.0</u>	<u>1.0</u>	<u>0.0</u>	M	F	F	C	- Roadside hedgerow. - Ivy on stem. - No access.	-
T171	Hornbeam	-	-	-	-	-	-	-	-	-	-	-	-	Tree removed.	-
T172	Hornbeam	-	-	-	-	-	-	-	-	-	-	-	-	Tree removed.	-
G173	Lombardy poplar	1	700	22	2.0	2.0	2.0	2.0	1.5	M	F	F	C	- Soil tacked on golf course side of trees. - Ivy present. - Poor pruning wounds.	-
T174	Oak	1	<u>800</u>	<u>8</u>	<u>5.0</u>	<u>5.0</u>	<u>5.0</u>	<u>5.0</u>	<u>2.0</u>	M	F	F	C	- Pollarded stump. - Ivy present. - No access.	-
T175	Oak	1	<u>1200</u>	<u>16</u>	<u>9.0</u>	<u>9.0</u>	<u>9.0</u>	<u>9.0</u>	<u>1.5</u>	M	F	G	B	- Dieback. - Ivy present. - Located off site. - No access. - In decline.	-
T176	Oak	1	1150	16	9.0	9.0	9.0	9.0	0.5	M	F	G	B	- Ivy present. - Roadside tree. - Old pruning wound. - Telephone wires running through.	-
G177	Lombardy poplar	-	570	19	4.0	4.0	4.0	4.0	0.0	M	F	F	C	- Ivy present. - Roadside tree. - Deadwood. - Telephone wires running through.	-
T178	Oak	1	1360	20	9.0	9.0	9.0	9.0	0.5	M	G	G	A	- Veteran potential. - Hanging deadwood. - Telephone wires running through.	-
T179	Oak	1	1070	11.4	9.0	9.0	9.0	9.0	0.5	M	G	G	A	- Tear on lower limb on eastern side - Hollow cavity	-
T180	Oak	1	1350	15	10.0	10.0	10.0	10.0	0.5	M	G	G	A	- Street lamp and pavement at base. - Deadwood.	-

Table 3.3 : Results of Arboricultural Survey (continues)

Tree No.	Species	No. Stems	Diam (mm)	H't (m)	Branch Spread (m)				Min Crown Clearance (m)	Age	Vigour	Struc Cond	Cat	Comments	Preliminary Management Recommendations
					N	E	S	W							
G181	Monterey cypress, Oak, Eucalyptus, Poplar	-	700	16	6.0	6.0	6.0	6.0	0.0	M	F	F	C	• Restricted inspection due to access	-
Key <u>Age Class</u> Y: Young = juvenile tree recently planted EM: Early mature = tree within first third of average life expectancy SM: Semi mature = tree within second third of average life expectancy M: Mature = tree within final third of average life expectancy OM: Over mature = tree beyond average life expectancy <u>Structural Condition</u> G: G = no structural defects F: Fair = remedial structural defects P: Poor = significant structural defects RPA: Root Protection Area															

Table 3.3 (cont'd): Results of Arboricultural Survey

3.4 ROOT PROTECTION AREA (RPA)

Table 3.4 provides details of the Root Protection Area (RPA) of all trees, groups or hedgerows surveyed which were classified as Category A, B or C specimens. This table also gives an approximate root protection radius for these trees.

Tree No.	Species	Diameter (mm)	Approximate Root Protection Radius (m)	Root Protection Area (m ²)
H170	Hawthorn	<u>200</u> *	2.4*	18*
G173	Lombardy poplar	700*	8.4*	222*
T174	Oak	<u>800</u>	9.6	290
T175	Oak	<u>1200</u>	14.4	652
T176	Oak	1150	13.8	598
G177	Lombardy poplar	570*	6.9*	150*
T178	Oak	1360	15.0	707
T179	Oak	1070	12.9	519
T180	Oak	1350	15.0	707
G181	Monterey cypress, Oak, Eucalyptus, Poplar	<u>700</u> *	8.4*	222*
Key: *: Around centre of each tree within group. <u>000</u> : Estimated dimension.				

Table 3.4: RPA and Approximate Root Protection Radius of Category A, B and C Trees, Groups and Hedgerows Surveyed

4. DISCUSSION

4.1 DESK STUDY

The desk study identified that no trees within the study area are subject to Tree Preservation Orders (TPO) and that the study area is not situated within a Conservation Area.

4.2 TREE QUALITY

Retention Value

The initial stage of a tree survey in accordance to BS5837:2012 looks at the trees on the site in terms of life expectancy and condition. Trees are then categorised according to their retention value.

Category A trees are those that have been assessed as being of a high quality and value; significant amendments to the proposed scheme should be considered in preference to their removal. These trees are shown in **Green** on the Tree Constraints Plan.

Category B trees are those that have been assessed as being of a moderate quality and value; amendments to the proposed scheme should be considered in preference to their removal. These trees are shown in **Blue** on the Tree Constraints Plan.

Category C trees are those that have been assessed as being of a low quality and value; the loss of these specimens should not necessarily be considered as a constraint to development. These trees are shown in **Grey** on the Tree Constraints Plan

Category U trees are those that have been assessed as having no retention value; these trees should not be a material consideration in the planning process. These trees are shown in **Red** on the Tree Constraints Plan.

Category A, B or C trees are those that should be a material consideration in the planning process whilst Category U trees are those which would be lost in the short term for reasons connected to their physiological or structural condition and hence they should not be a consideration in the planning process.

Overall eight trees, one hedgerow and three groups of trees have been inspected in accordance with BS5837:2012 '*Trees in Relation to Design, Demolition and Construction – Recommendations*'.

A summary of the trees, groups and hedgerows in each of the four categories is given in Table 4.1.

BS5837:2012 Category	Tree Number
A	T178, T179, T180.
B	T175, T176.
C	H170, T171, T172, G173, T174, G177, G181.
U	Nil.

Table 4.1: Summary of Trees, Groups and Hedgerows in BS5837:2012 Categories

Physiological Condition

Trees considered to be in a good physiological condition are those with crown density and shoot extension growth levels within the expected ranges for their age and species. Generally, these trees, subject to being of a suitable structural condition, can be expected to make a lasting contribution to the site. Additionally, trees within the good condition class are likely to tolerate changes within their growing environment that occur as a result of development; as such their successful retention will be easier to achieve.

Trees considered to be in a fair physiological condition are those specimens exhibiting lower shoot extension growth and reduced crown density than would typically be expected. These specimens have a lower life expectancy than those within the good condition class and will not tolerate significant changes as a result of development as well as those in the good condition class.

Trees considered to be in a poor physiological condition are those exhibiting crown and shoot dieback and significantly reduced crown density. Trees of a poor physiological condition are not likely to make a lasting contribution to the site and whilst their retention in the short term may be beneficial such retention will only be achievable if the trees are fully protected throughout development as they will not tolerate changes in their growing environment.

Chart 4.1 summarises the distribution of tree physiological condition across the study area.

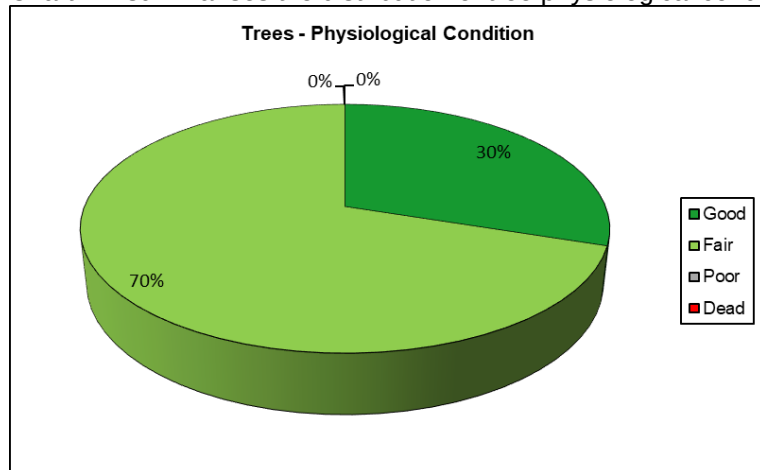


Chart 4.1: Tree Physiological Condition

Age Distribution

Those trees assessed as being young (Y) in age can generally be considered to have significant growth potential. Whilst these specimens are not likely to make a substantial contribution to the landscape character of the site at present they will, if retained, provide succession for the eventual removal of mature or over-mature trees as a result of declining physiological or structural condition.

Early mature trees (EM) will generally make a significant contribution to the landscape character and appearance of the site and their retention will provide more immediate succession. These trees will also have significant growth potential.

Mature trees (M) are not considered to have significant future growth potential and have generally reached their maximum expected size for the location. These trees will generally make the highest contribution to the landscape contribution of the site however a tree stock over dominated by mature trees will require careful management to ensure that continuation of canopy cover can be achieved.

Over-mature trees (OM) do not have the potential to increase in size and may in fact reduce in size as their crowns begin to break up. These trees will often make a significant contribution to the landscape character of the site and are likely to have ecological value. However, the retention of these trees within new development must be carefully planned as they are approaching the end of their useful life expectancy and they will often have structural defects. Where over-mature trees are to be retained in new development it is essential that access is available for their eventual removal.

Veteran trees (V) are those that show features of biological, cultural or aesthetic value that are characteristic of an individual surviving beyond the typical age range for the species. These trees have negligible potential to increase in size. Veteran trees are usually of a high ecological value and they will require sensitive management where they are to be retained in new development. As such it is again essential that they are located in areas where access is available to undertake management operations and where there is a reduced risk of harm occurring from failure of the trees.

Visual Amenity

The trees and groups of trees located adjacent to the western boundary of the site are, as a group, a prominent feature of the local landscape and are considered to have a high visual amenity value.

Ecological Value

Generally speaking it is known that trees are of ecological value and that they fulfil an important role in the urban landscape. In particular it should be noted that trees may provide habitat for protected species, notably for birds and bats.

5. ARBORICULTURAL DESIGN GUIDANCE

5.1 THE TREE CONSTRAINTS PLAN

The Tree Constraints Plan (Drawing Number C129668-01-01, contained within Section 7 of this report) is designed to show the influence that the trees have upon the site by virtue of their size and position. The plan seeks to act as a design tool that shows both the above and below ground constraints presented by the trees.

The information provided within this section of the report is to assist in the interpretation of the Tree Constraints Plan and aims to ensure that those trees selected for retention can be successfully integrated within the proposed development.

5.2 TREE RETENTION / REMOVAL

The prioritisation for tree retention should be based upon the guidance contained within BS5837:2012. Category A trees should be seen as the highest priority for retention and Category C the lowest.

Category U trees have no retention value and in most circumstances such specimens will not be considered for retention within new development.

When considering which Category C trees to retain in the new development priority should be given to those trees that have been included within this category solely due to their having stem diameters of less than 150 mm at 1.5 m above ground level. These specimens are normally relatively young trees with future potential.

5.3 BELOW GROUND CONSTRAINTS

Root Protection Areas

Root Protection Areas for each tree and group of trees surveyed have been determined in accordance with BS5837:2012 and a schedule of Root Protection Areas is detailed within this Report as Table 3.4.

Initial Root Protection Areas (RPAs) for the trees have been plotted onto the Tree Constraints Plan as circles, with the tree located centrally, extending to encompass the area of ground, and thus the rootable soil volume, required for protection.

Where possible all development, including new hard landscaping, shall be situated outside of the retained trees designated Root Protection Areas.

Removal of Existing Hard Surfaces and Buildings

In addition to the effects that such construction may have upon the shape and location of the Root Protection Area of the tree, the presence of existing construction within the trees initial RPAs is also of note. Removal of such construction, should it be required, has a greater potential to cause harm to the trees due to the need for works in close proximity to them.

Where existing hard surfaces are located within the Root Protection Areas of retained trees care should be taken in their removal and such works should be completed by hand and supervised by an Arboricultural Consultant.

Where existing buildings are located within the Root Protection Areas of retained trees, care shall be taken in their demolition and works should be completed from outside the RPA with buildings being pulled back away from the trees. Again, it is recommended that such works are supervised by an Arboricultural Consultant.

New Hard Surfaces and Buildings within Root Protection Areas

The construction of new hard surfaces and buildings around trees has the potential to cause soil compaction, to cause root damage and to reduce nutrient and moisture availability to tree roots to the detriment of tree health and vitality.

To minimise harm occurring as a result of such works, where installation of new hard surfacing is proposed within the Root Protection Areas of retained trees, it must be installed in accordance with no-dig principles.

Should new buildings be proposed within the RPA of an existing tree it will be necessary to take steps to minimise the potential impact to the tree to allow construction. In this respect the guidance contained within BS5837:2012 at clause 7.5 should be considered. This states: *"The use of traditional strip footings can result in extensive root loss and should be avoided. The insertion of specially engineered structures within RPAs may be justified if this enables the retention of a good quality tree that would otherwise be lost (usually Categories A or B). Designs for foundations that would minimize adverse impact on trees should include particular attention to existing levels, proposed finished levels and cross-sectional details. In order to arrive at a suitable solution, site-specific and specialist advice regarding foundation design should be sought from the project arboriculturist and an engineer. In shrinkable soils, the foundation design should take account of the risk of indirect damage."*

Building Foundations

Any structures built on the site should comply with the foundation depths for buildings near or adjacent to trees and allow for the potential size of the trees at maturity. The soil types throughout the site will need investigating and appropriate measures taken.

If trees are removed across the site the potential for soil heave should be assessed and foundations designed accordingly (see NHBC Chapter 4.2, 2014).

Service Runs

All service runs, utilities and similar infrastructure should take note of trees and allow for working methods that will minimise damage to trees by referring to documents such as NJUG Volume 4 - Guidelines for the planning, installation and maintenance of utility services in proximity to trees (National Joint Utilities Group 2007).

5.4 ABOVE GROUND CONSTRAINTS

Existing Canopy Spreads

The existing canopy spreads of the trees on site are shown on the Tree Constraints Plan (Drawing Number C129668-01-01, contained within Section 7 of this report).

The current spread of a tree is a constraint due to its dominance, size and movement in strong winds. It will typically be unacceptable to design any built development within the current spread of a tree.

Where built development is proposed in close proximity to existing trees consideration should be given to the amount of working space required to allow its construction.

Additionally, where development is proposed in close proximity to the existing canopy spread of a tree the likelihood of leaf or fruit fall or an accumulation of honeydew causing nuisance must be given.

It should also be noted that where the Root Protection Areas for retained trees do not extend to the edge of existing canopy spreads it is possible that those parts of the trees extending beyond the RPA may sustain damage during construction.

Where this occurs, there are two primary options available to manage and minimise the potential for damage to tree canopies during development and these may be used singularly or in combination.

The first option is to create a Construction Exclusion Zone (CEZ), by the erection of protective fencing, around the full extent of the tree's canopy. The second is to undertake pre-development pruning works to the trees to reduce the potential for branch damage to occur.

Future Tree Growth

Some of the trees surveyed are not yet mature and they have the potential for future growth. Where these are to be retained consideration of their ultimate crown spread should be given as future branch growth may

result in interference with the proposed development, damage to branches and the need for a tree pruning regime.

Within the area of maximum branch spread, construction activities should be restricted for the long-term health and vigour of the trees. It is considered that within the area of maximum branch spread single storey buildings and the installation of hard surfaces would be an appropriate form of construction however, should car parking be proposed beneath the ultimate spread of trees the likelihood of fruit fall, leaf litter or sap exudation causing a nuisance must be considered.

In addition, it is important to consider the likelihood of damage to trees or structures that may be caused by continuous whipping of branches in windy conditions. In such circumstance's branches may have to be repeatedly cut back which will introduce wounds in the tree and may spoil its form or shape. In general terms trees should not be retained upon the basis that their ultimate branch spread can be significantly controlled by periodic pruning.

6. RECOMMENDATIONS

The following site-specific recommendations are made:


- The retention of the Category A and B trees across the site should be considered as a priority as these specimens are likely to make a substantial contribution to the continued landscape character of the site.
- The retention of the Category C trees should be considered where possible though it must be noted that these specimens have a low retention value and are likely to only offer a temporary contribution to the landscape character of the site.
- In general, all new development shall be located outside of the RPA or canopy spread of any retained tree.
- Where any new development is proposed within the RPA or canopy spread of a retained tree it must be constructed in such a way that damage of the trees root system or crown can be avoided.
- Should new development require works within the RPA of any retained tree an Arboricultural Method Statement should be prepared to set out what steps are to be taken to protect the trees during the course of development.
- Any proposed new planting should consist of native and wildlife attracting species with a robust five-year management plan to assist with the development proposal and to offer mitigation for any tree loss.
- This Arboricultural Survey is valid for a period of 12 months. If works are not commenced within this time period then it is advised that the trees are re-inspected to ensure no significant defects have developed since the original survey.

The following generic guidance should also be considered during the construction phase of any development, or significant engineering:

- Any trees, groups or hedgerows that are to be retained should be adequately protected by Heras fencing, in line with BS5837:2012, extending at least to the Root Protection Radius, to prevent accidental damage by vehicles or contractors (see Table 3.4, page 9, for RPA data for each tree).
- All tree works are to be carried out by a competent and qualified arborist to BS3998:2010 standards.
- Tree protection should be included in the induction and/or briefing sessions by the contractors to site personnel.
- Soil compaction, from the storage of large quantities of materials and plant tracking, may result in changes to soil permeability and local drainage. This may lead to waterlogging or loss of soil crumb structure. These effects may in turn lead to root asphyxiation and root death, a cause of instability and or mortality in trees. For this reason, heavy machinery and the storage of materials should be excluded from the crown and Root Protection Radius of all trees.
- The recommendations of BS5837:2012 and National Joint Utilities Group Volume 4 (Guidelines for the Planning, Installation and Maintenance of Utility Services in Proximity to Trees) (as appropriate to operations) should be followed when working close to trees.
- If works take place during the bird breeding season, usually from March to September inclusive, trees and hedgerows should be checked for nesting birds. If any trees are to be removed this should be done outside the breeding season or in the presence of a suitably qualified ecologist.
- Mature trees often contain cavities, hollows, peeling bark or woodpecker holes which provide potential roosting locations for bats. Bats and the places they use for shelter or protection (i.e. roosts) receive European protection under The Conservation of Habitats and Species Regulations 2010, as amended (Habitats Regulations 2010, as amended). They receive further legal protection under the Wildlife and Countryside Act (WCA) 1981, as amended. Consequently, causing damage to a bat roost constitutes an offence. As such prior to undertaking works to trees a check to see if they are being used for bat roosting should be undertaken by a suitably qualified and experienced ecologist.

7. DRAWINGS

Drawing Number C129668-01-01– Tree Constraints Plan

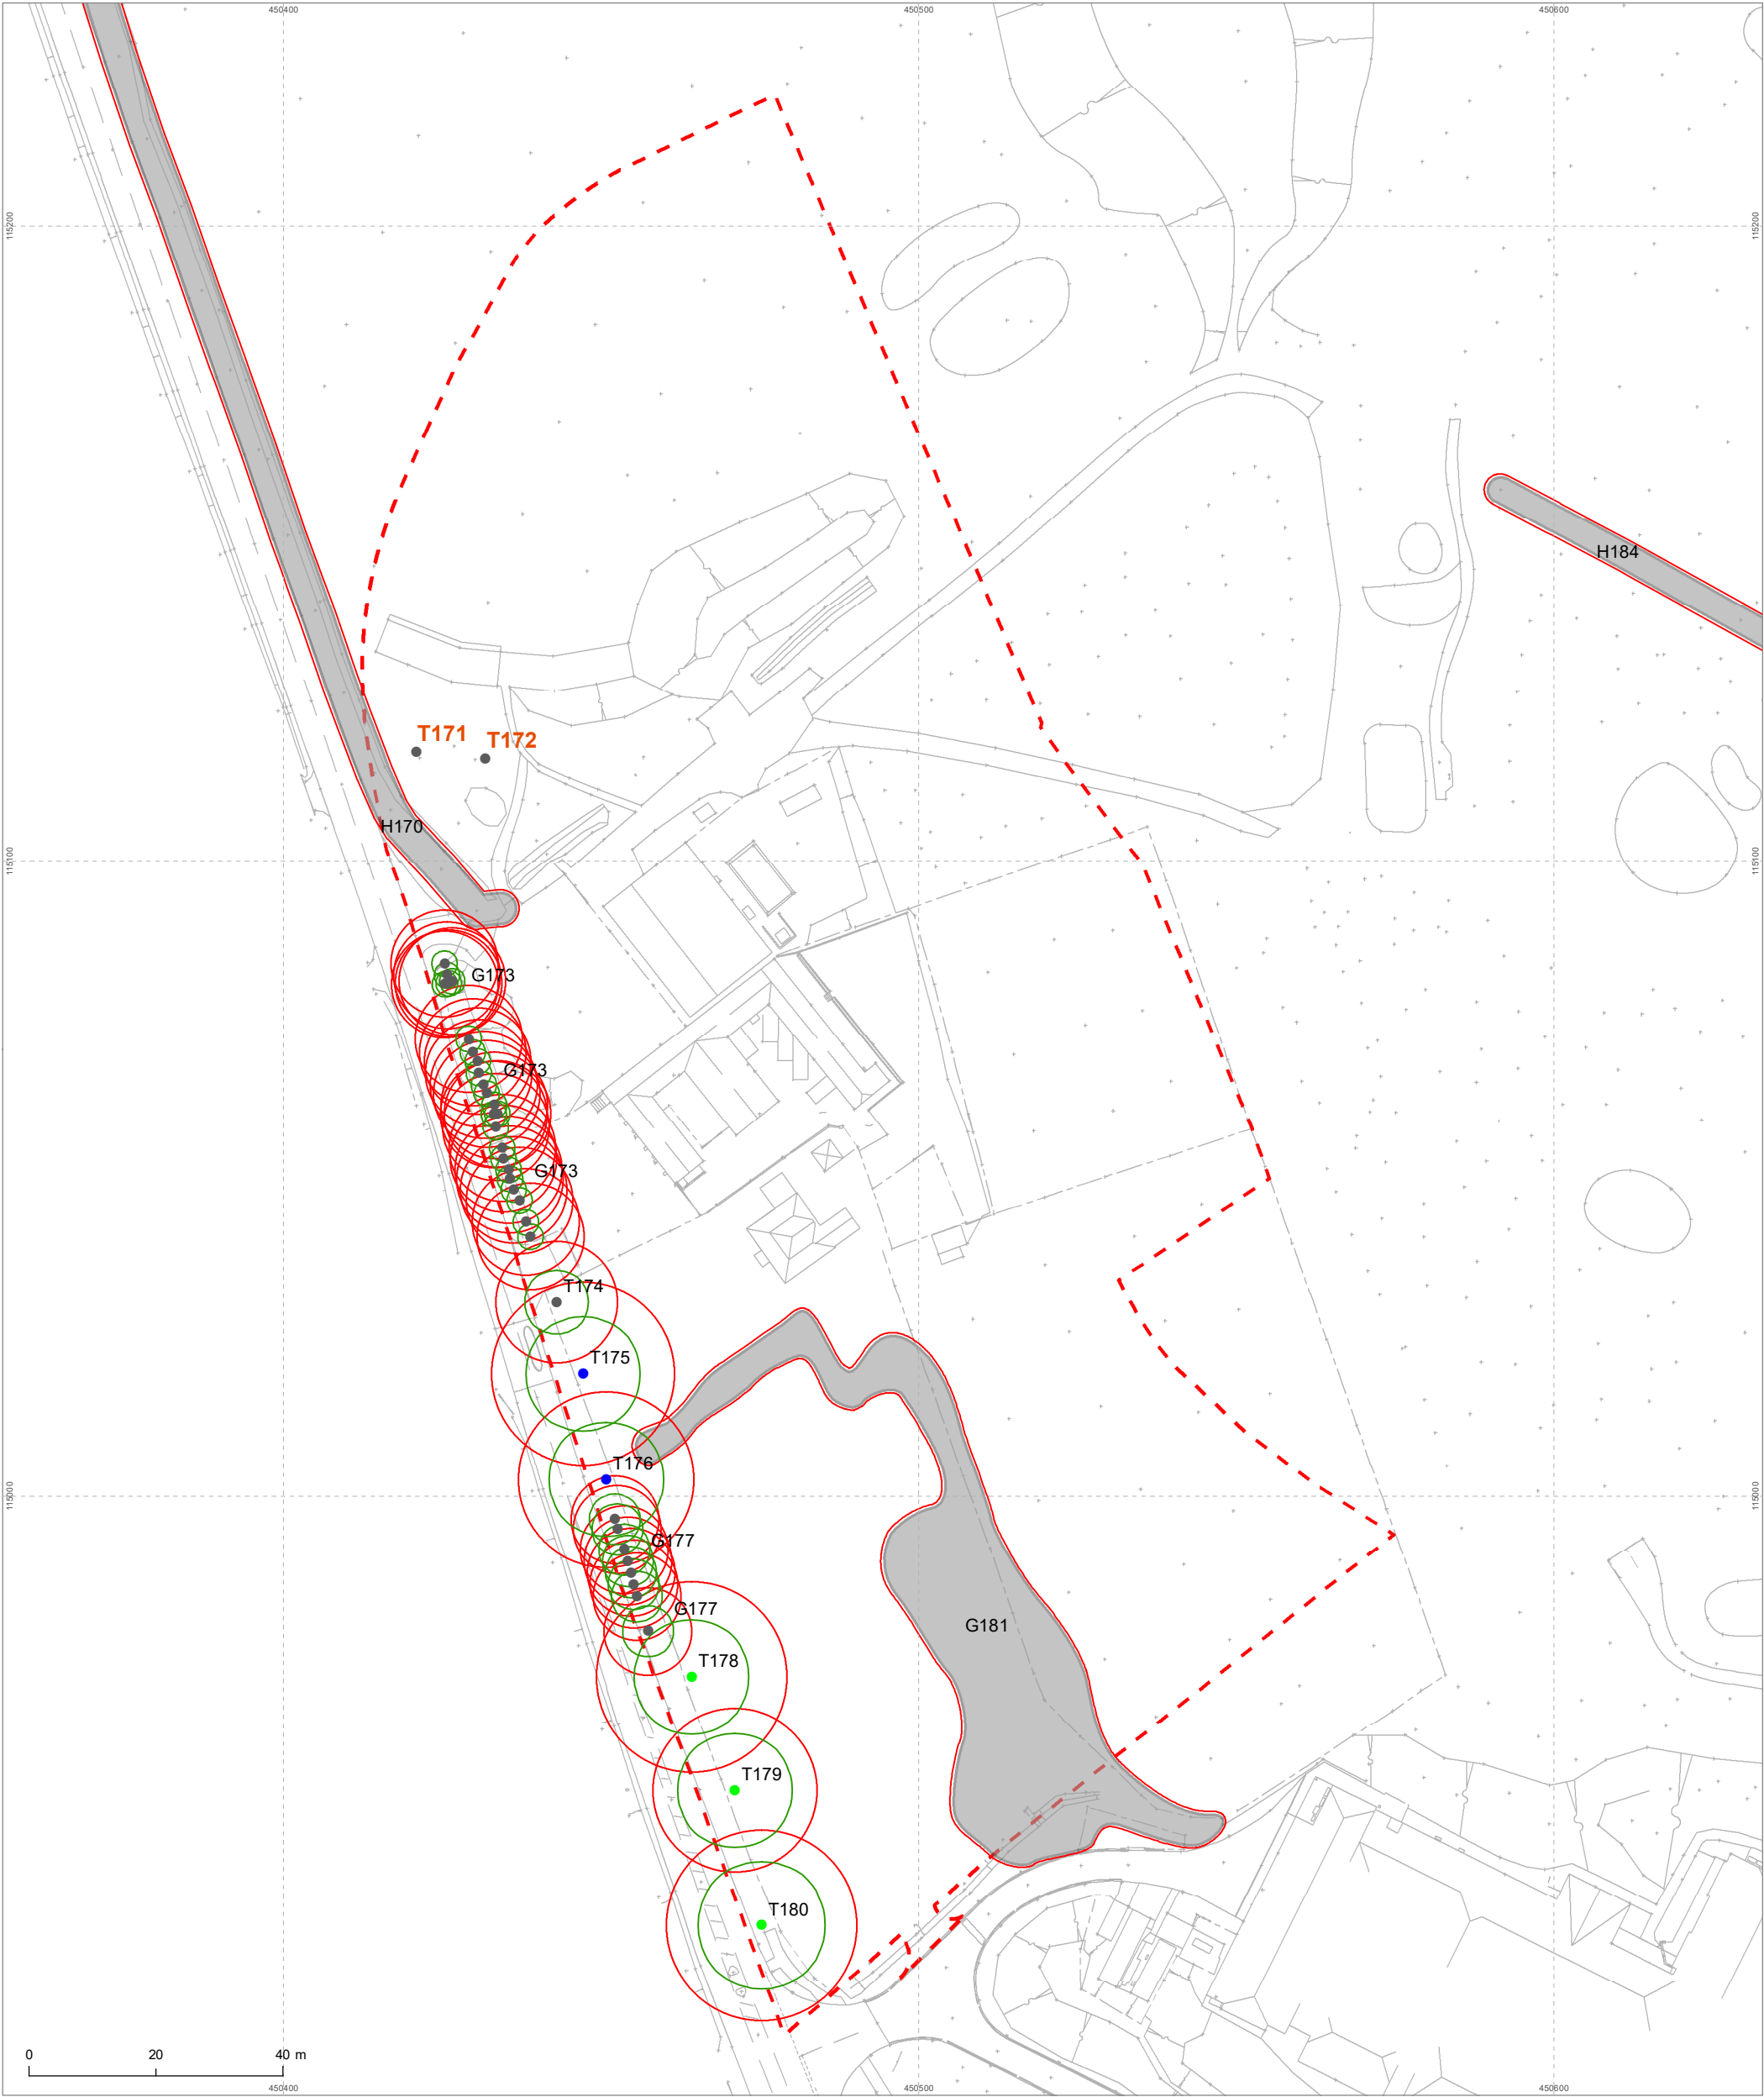

Legend

Layer

Category A tree

Category B tree

Category C tree

Current canopy extent

Root protection area

Category C group

Site boundary

T00

Previously removed tree

Project

Non-Residential Phase,
Land at Boorley Green, Boorley

Drawing

Tree Constraints Plan

Client

Boorley Green Development Consortium

Drawing Number

C129668-01-01

Revision

00

Scale @ A3

1:1000

Date

December 2018

Approved By

MK

Drawn By

RP/CD

MIDDLEMARCH
ENVIRONMENTAL

Triumph House, Birmingham Road, Allesley, Coventry CV5 9AZ
T:01676 525880 F:01676 521400
E:admin@middlemarch-environmental.com

This map is reproduced from the Ordnance Survey material with the permission of Ordnance Survey on behalf of The Controller of Her Majesty's Stationary Office. © Crown copyright. Unauthorised reproduction infringes Crown copyright and may lead to prosecution of civil proceedings.
Licence Number: 100040519
Drawing based on proposed CAD "CONS 160608 SL01_GC RevA.dwg" and "X SMA Roundabout - final.dwg" supplied by the client.

The original of this drawing was produced in colour -
a monochrome copy should not be relied upon

C129668-01-01

REFERENCES AND BIBLIOGRAPHY

Arboricultural Advisory Information Services. (2007). 'Practice Note 12. Through Trees to Development'.

British Standards Institution. (2012). *British Standard 5837:2012, Trees in relation to design, demolition and construction – recommendations*. British Standards Institution, London.

British Standards Institution. (2010). *British Standard 3998:2010, Trees work– recommendations*. British Standards Institution, London.

Johnson, O. and More, D. (2004). *Tree Guide*. Collins, London.

Lonsdale, D. (1999). *Principles of Tree Hazard Assessment and Management*. DETR, London.

National House Building Council. (2014). NHBC Standards 2014: Chapter 4.2 - Building Near Trees. NHBC, Milton Keynes.

National Joint Utilities Group. (2007). *Volume 4: NJUG Guidelines for the Planning, Installation and Maintenance of Utility Services in Proximity to Trees*. NJUG, London.