






For Construction
These drawings are produced, together with any related
drawings, to inform the setting out and construction of the
works. To be read in conjunction with all working
drawings.

NOTES

1. All pipe diameters/culvert sizes in millimetres unless otherwise shown.
2. Pipe materials as follows:
Type CLAY - Clay pipes to BS EN 295-1, Strength Class 160 or above (where relevant)
Type CONC - Concrete pipes to BS 5911-1: 2002 + A2: 2010, Strength Class 120
3. All pipe bed and surrounds to be Type S unless otherwise shown.
4. All sewers shown are to be offered for adoption under a S104 Agreement unless otherwise shown.
5. S104 systems to be adopted by Icoso Water.
6. All drainage works shall be constructed in accordance with the Design and Construction Guidance (DCG) published by Water UK. Any conflict between the proposals and the DCG then the DCG shall override.
7. Existing ground levels are potentially filled with material from previous phases - refer to the existing and as-built topographical surveys.
8. SUBJECT TO TECHNICAL APPROVAL

KEY

- S1 Phase 2 S104 Storm System
- F1 Phase 2 S104 Foul Sewer
- S1 Other S104 Storm System
- F1 Other S104 Foul Sewer
- H1 Highway Drainage (HCC or Management Co.)

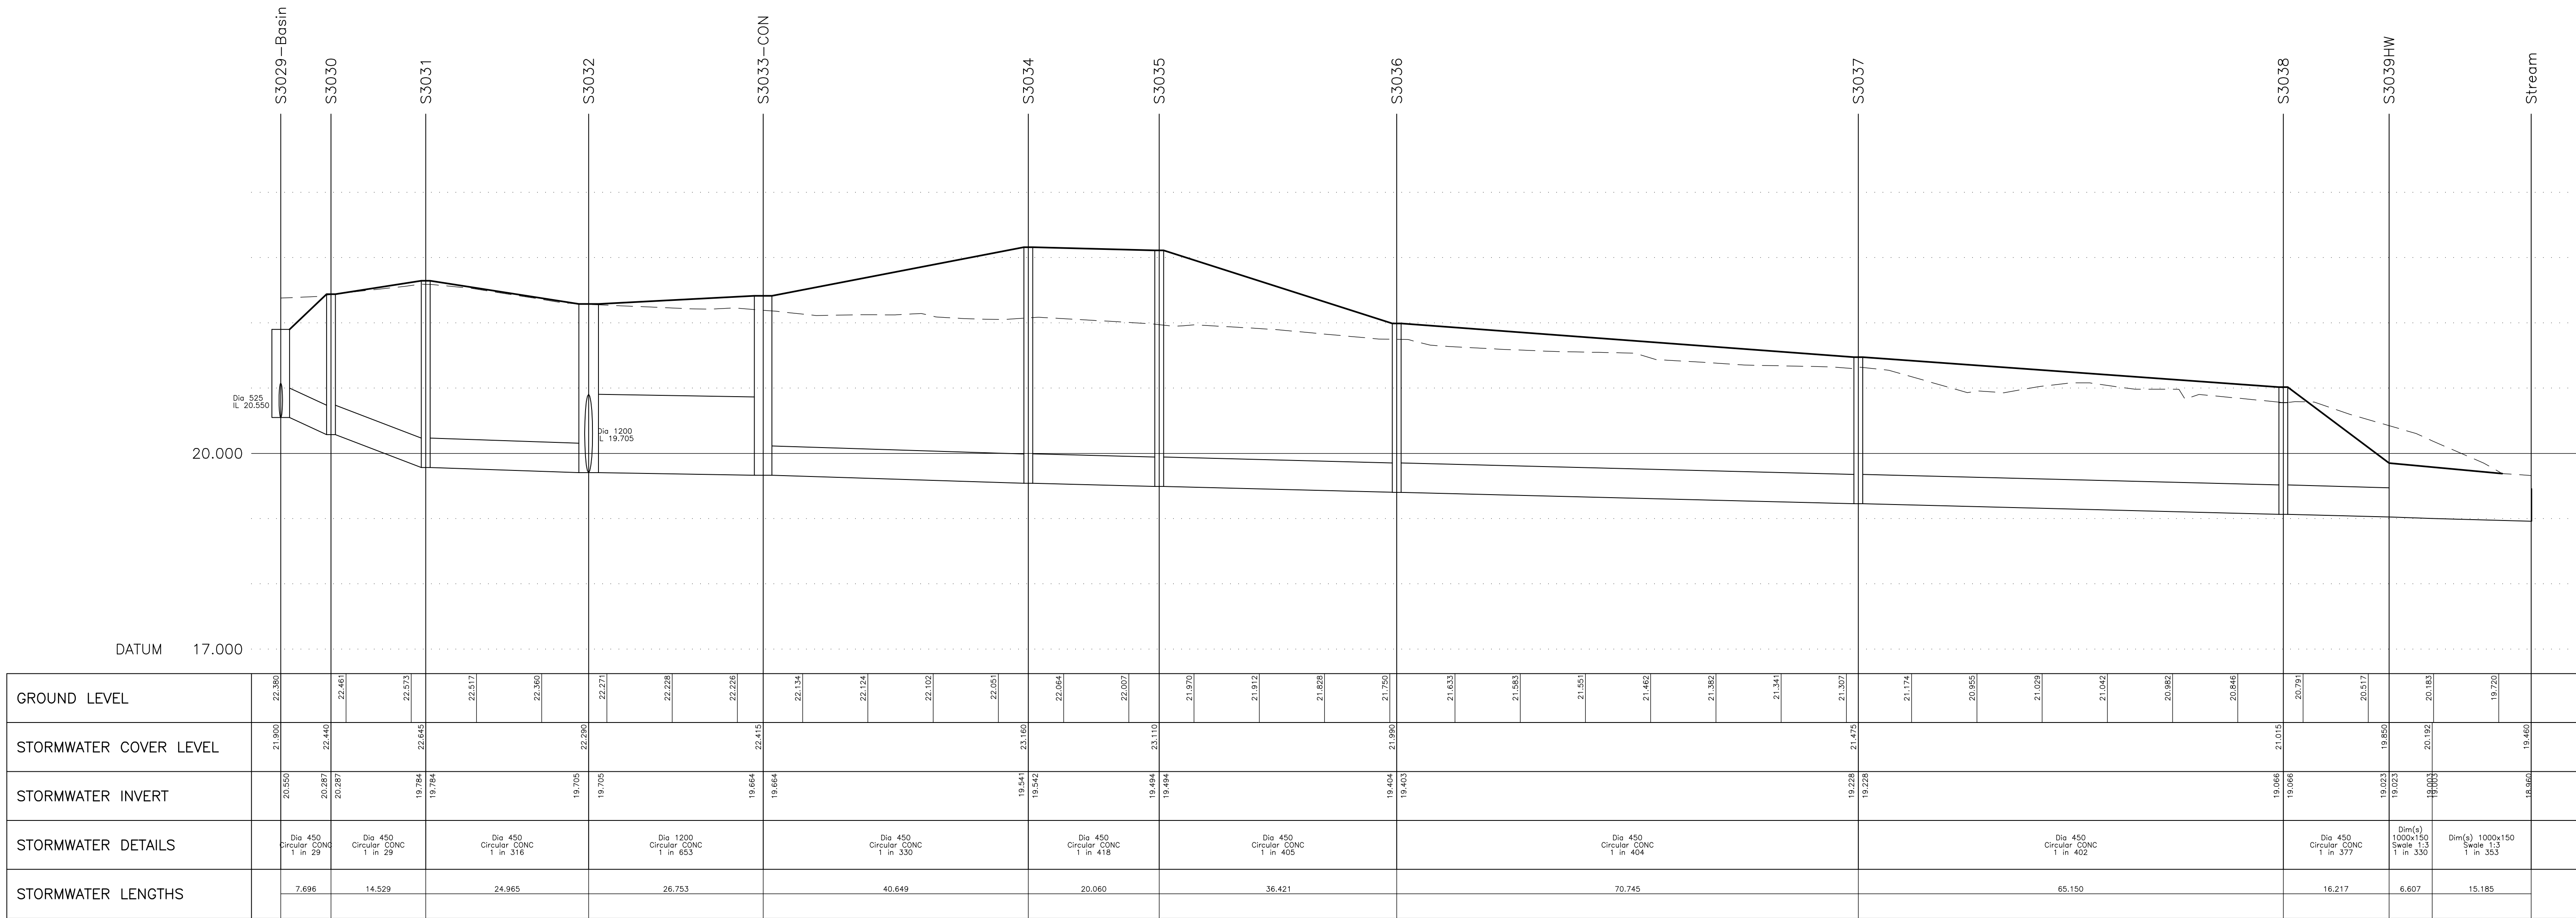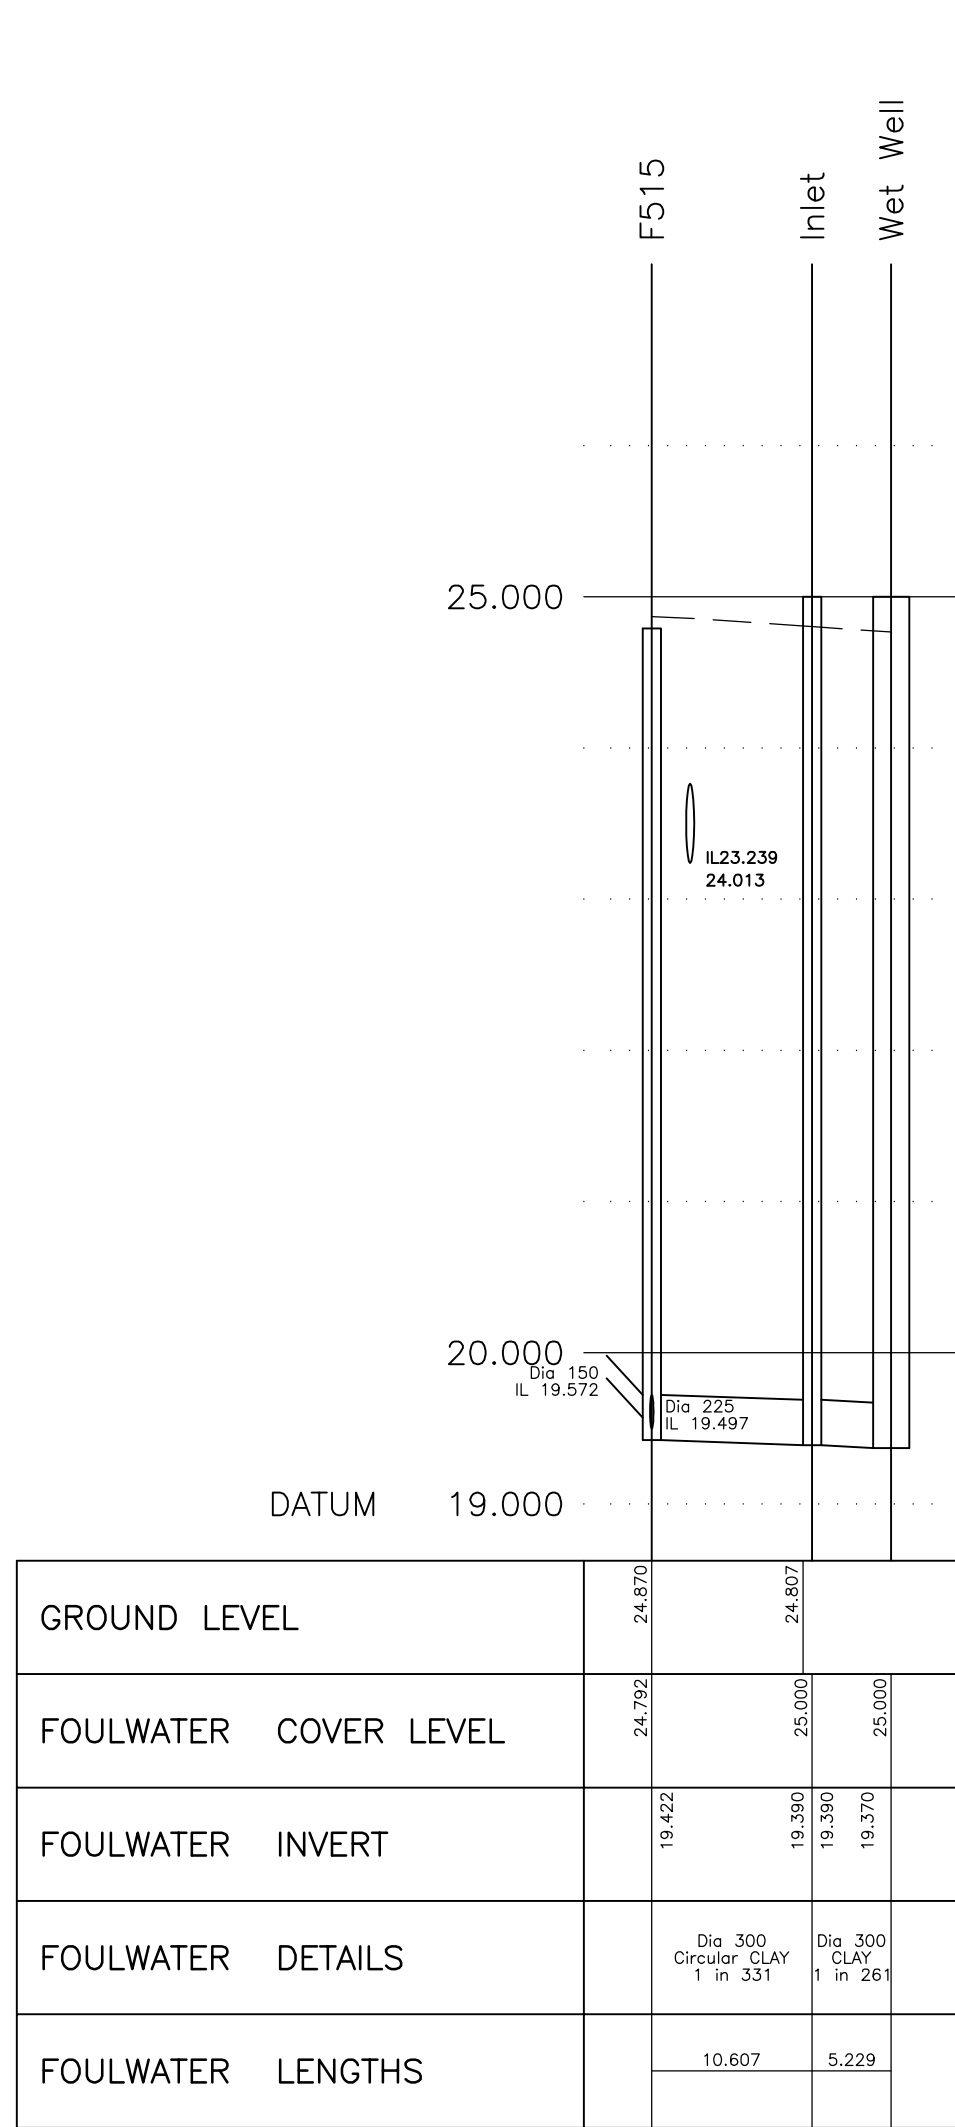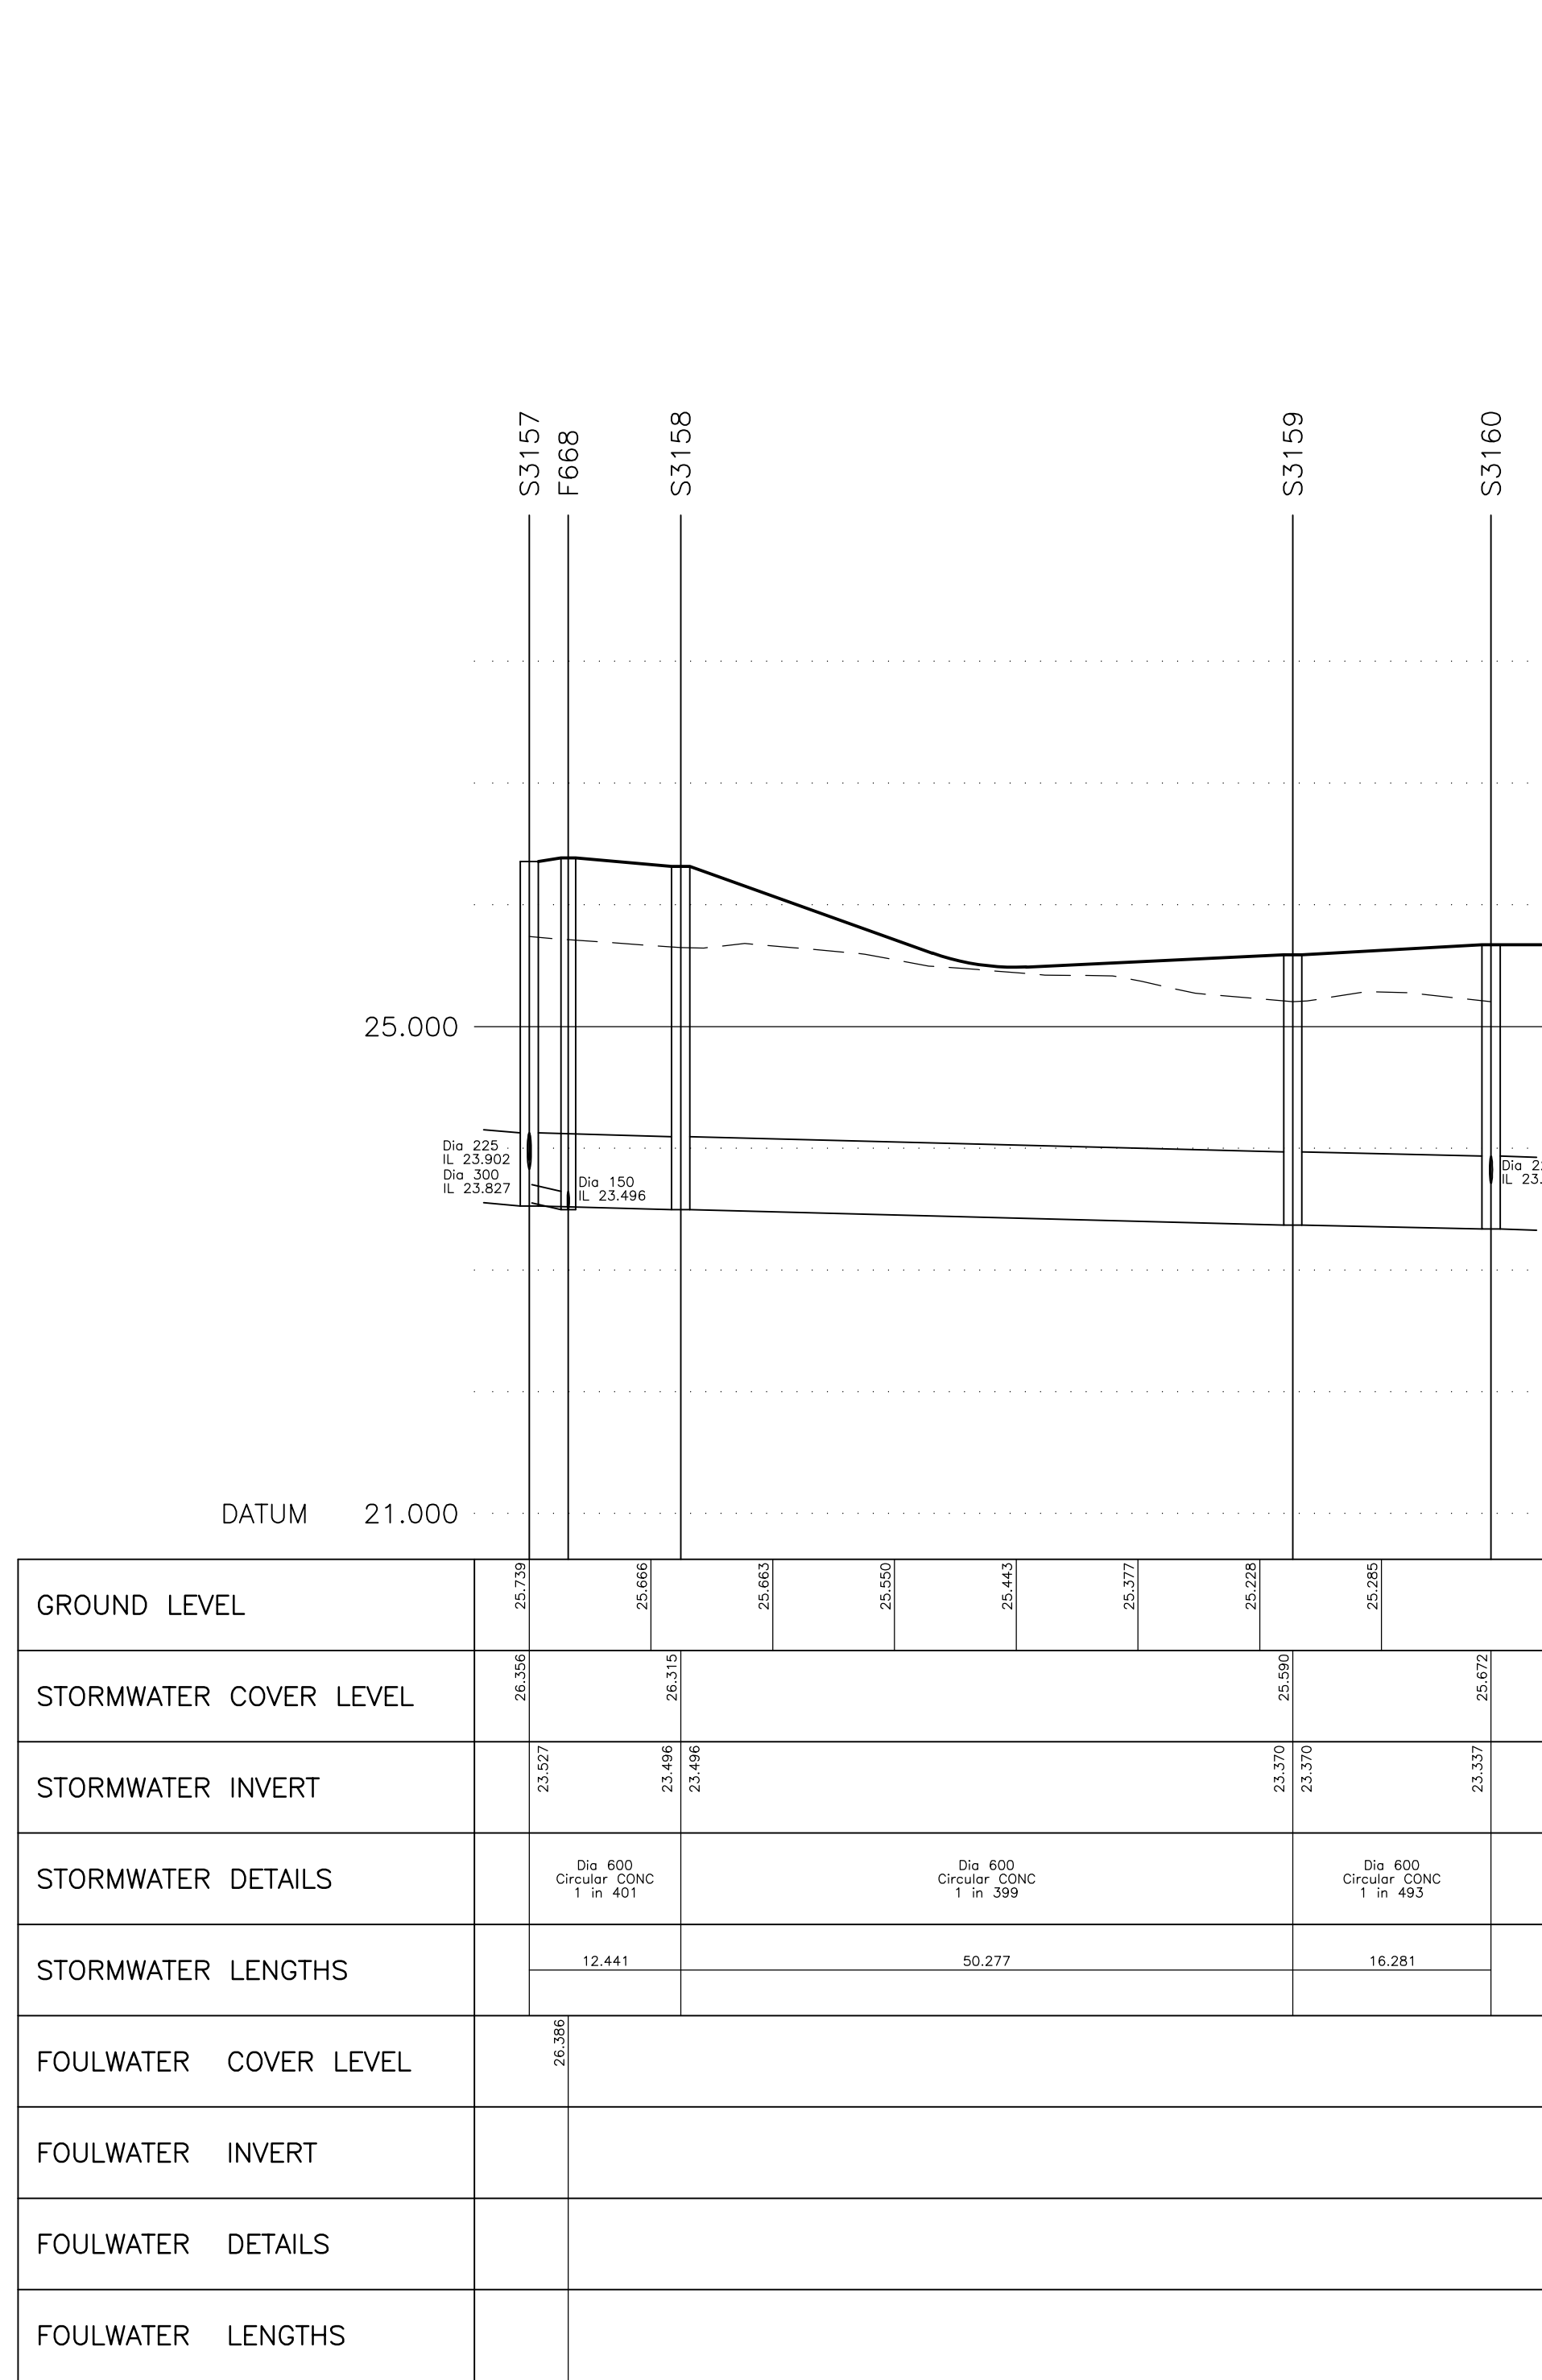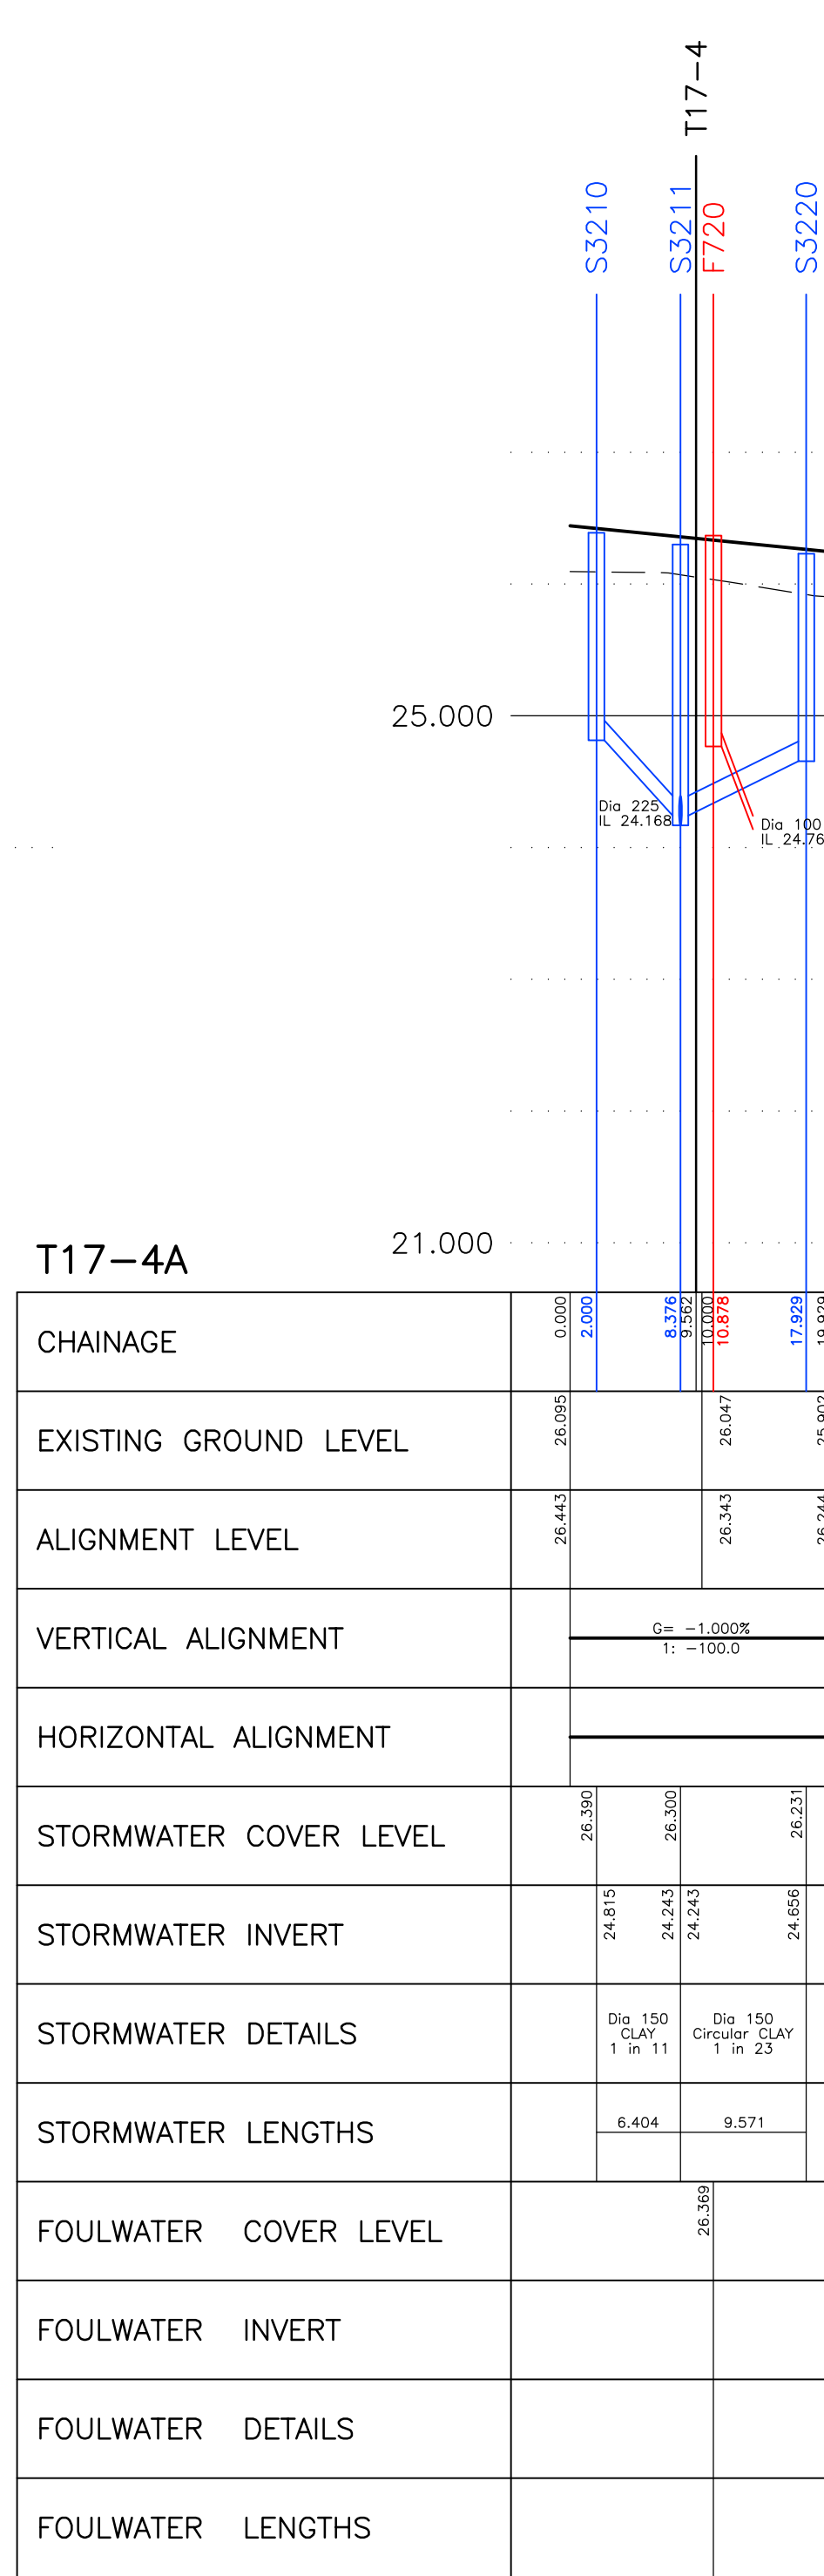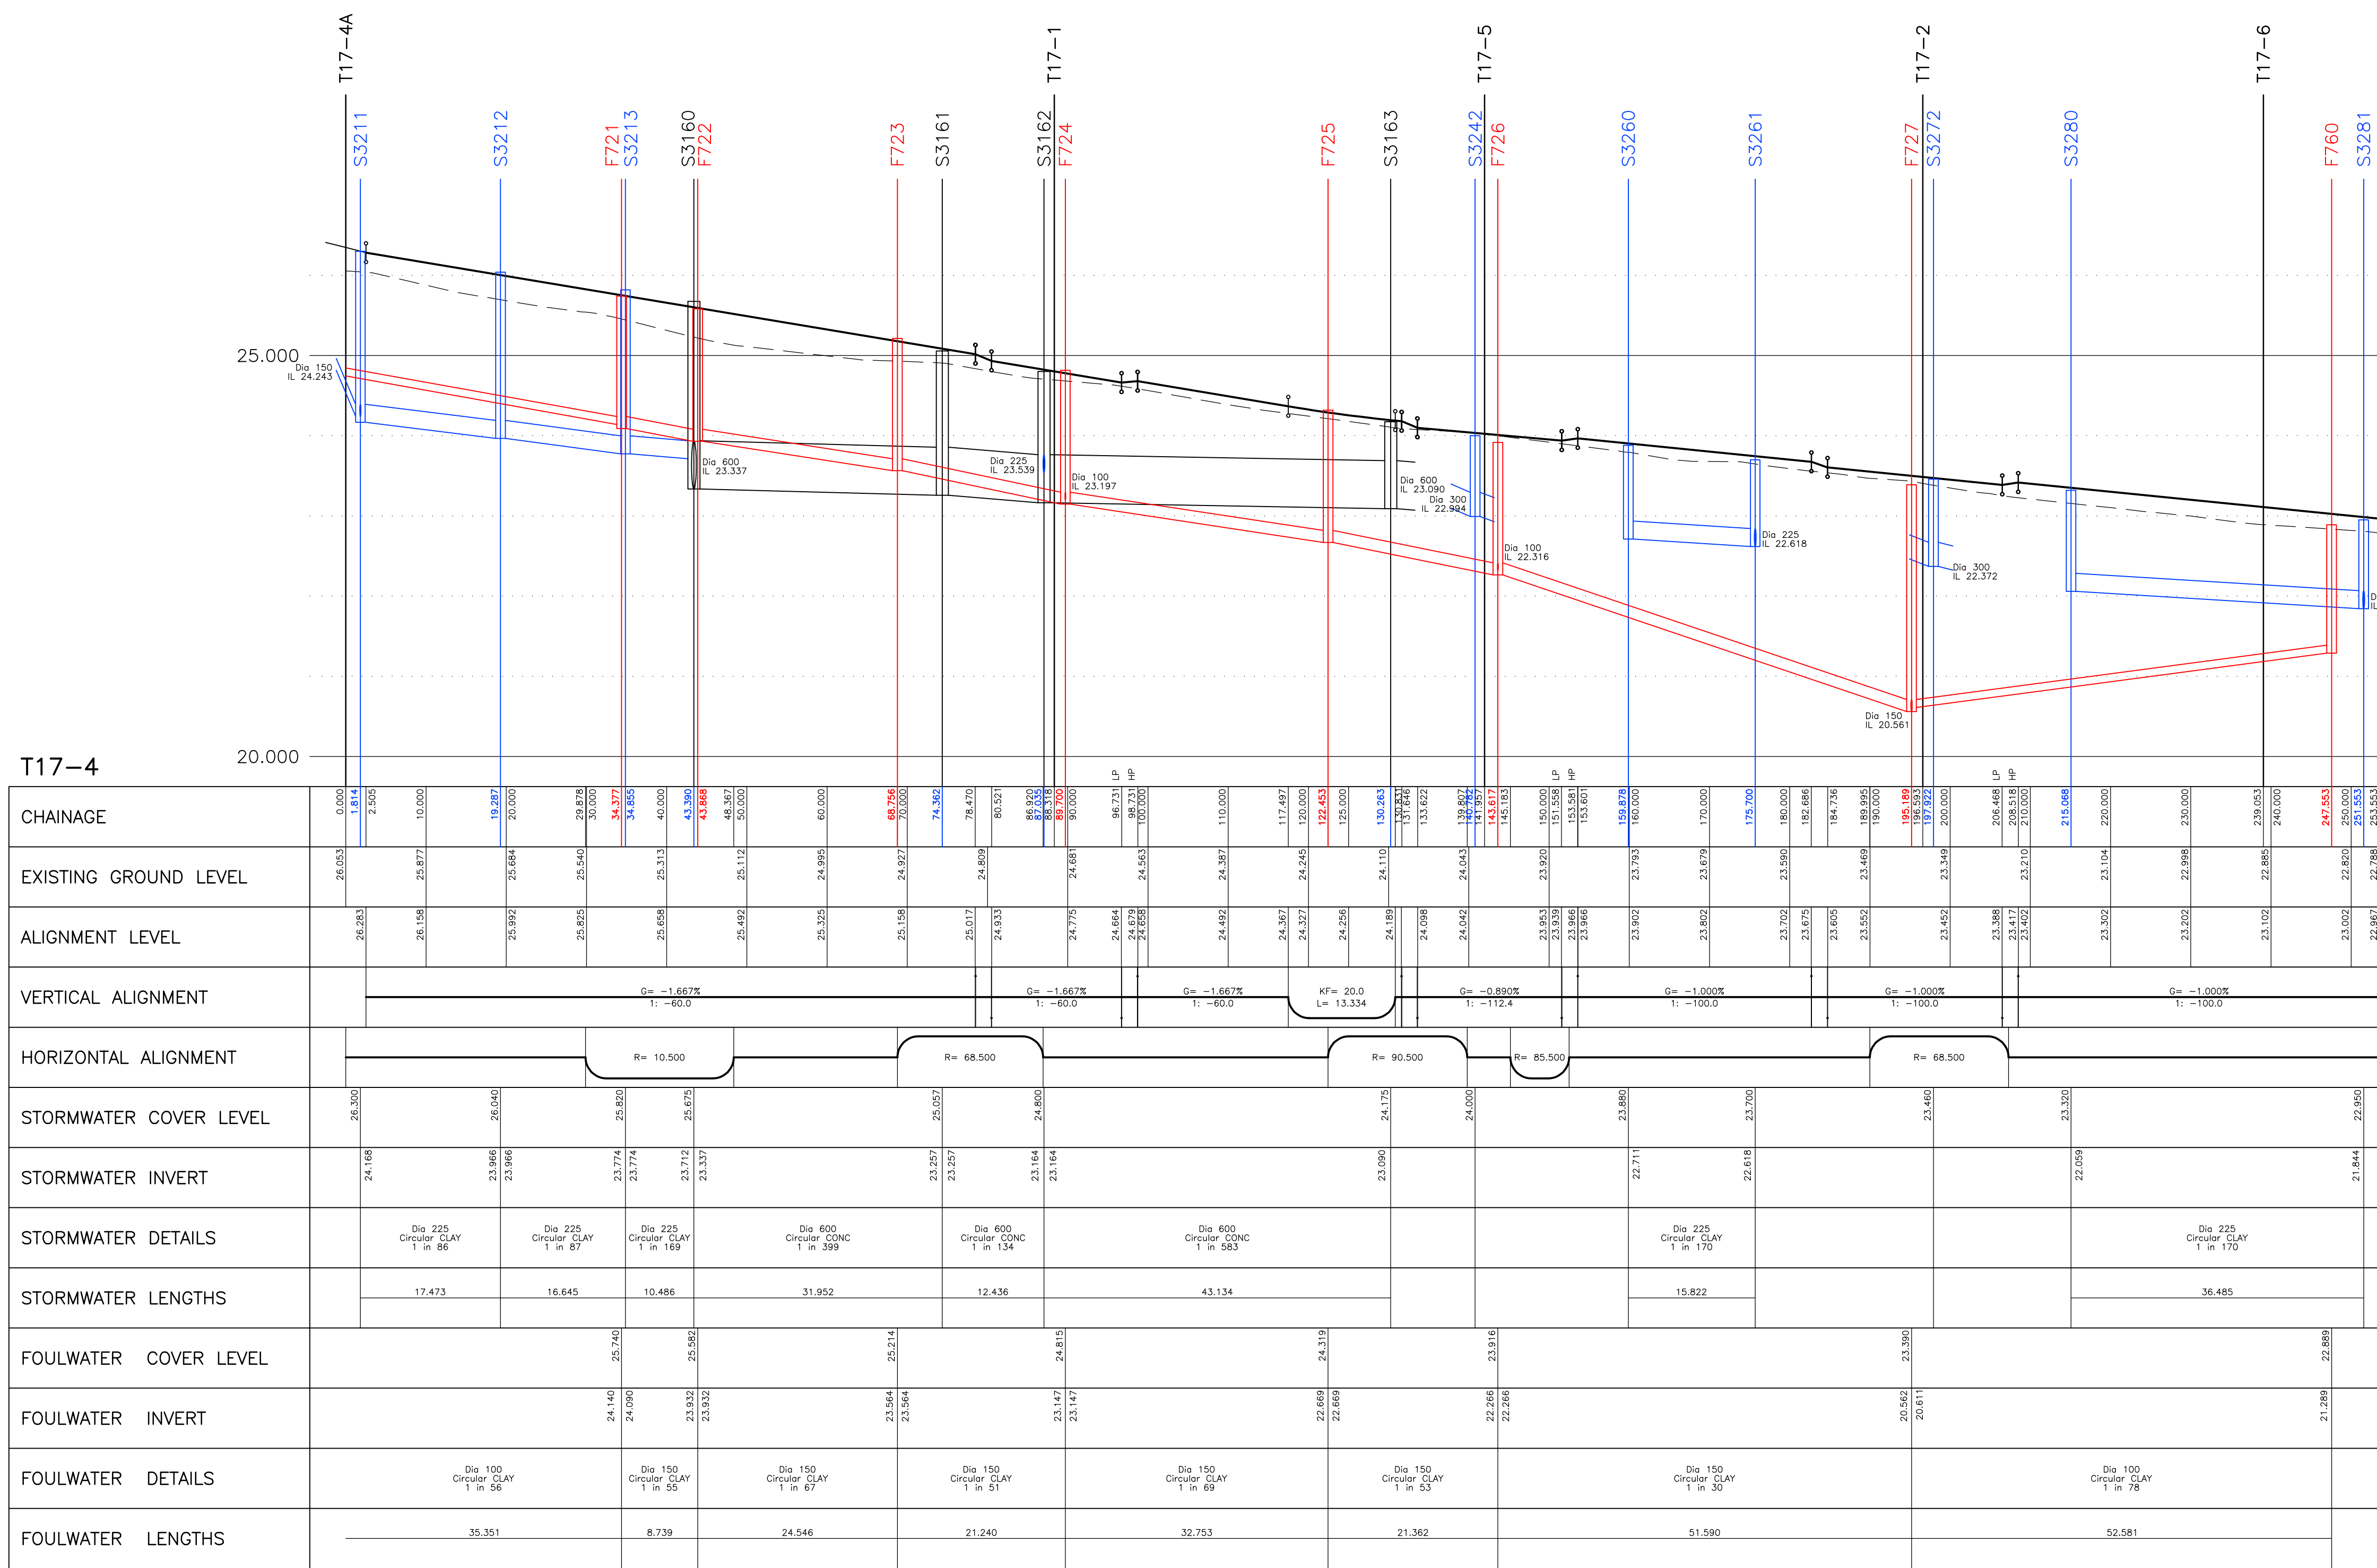

Rev	Date	Description	Drawn	Check
A	12/01/22	First Issue	BOC	DRB
B	21/02/22	Drawing revised to 'For Construction', as instructed by Miller Homes.	JM	DRB
C	17/03/22	Cover levels to manholes S3158 and S3159 amended.	DRB	CI
D	21/04/22	Drainage lengths being offered for Phase 1 S104 reviewed as required by Icoso.	DRB	CI
E	12/01/23	Sewers under Phase 2 S104 application now coloured, remainder coloured black.	JW	DRB

Status
FOR CONSTRUCTION

Client

millerhomes

Project

**Boorley Gardens
Winchester Road
Hedge End
Phase 2**

Drawing Title

**Longitudinal Sections
Sheet 2 of 2**

Drawing No.

M434/14

Rev D

Date: January 2022 Scale: 1:500H; 1:50V @ A0
E-Mail: dbrock@pfaplcl.com