


1 Exterior 1

1.1 Summary, Exterior 1

1.1.1 Result overview, Airport Apron - Only columns active

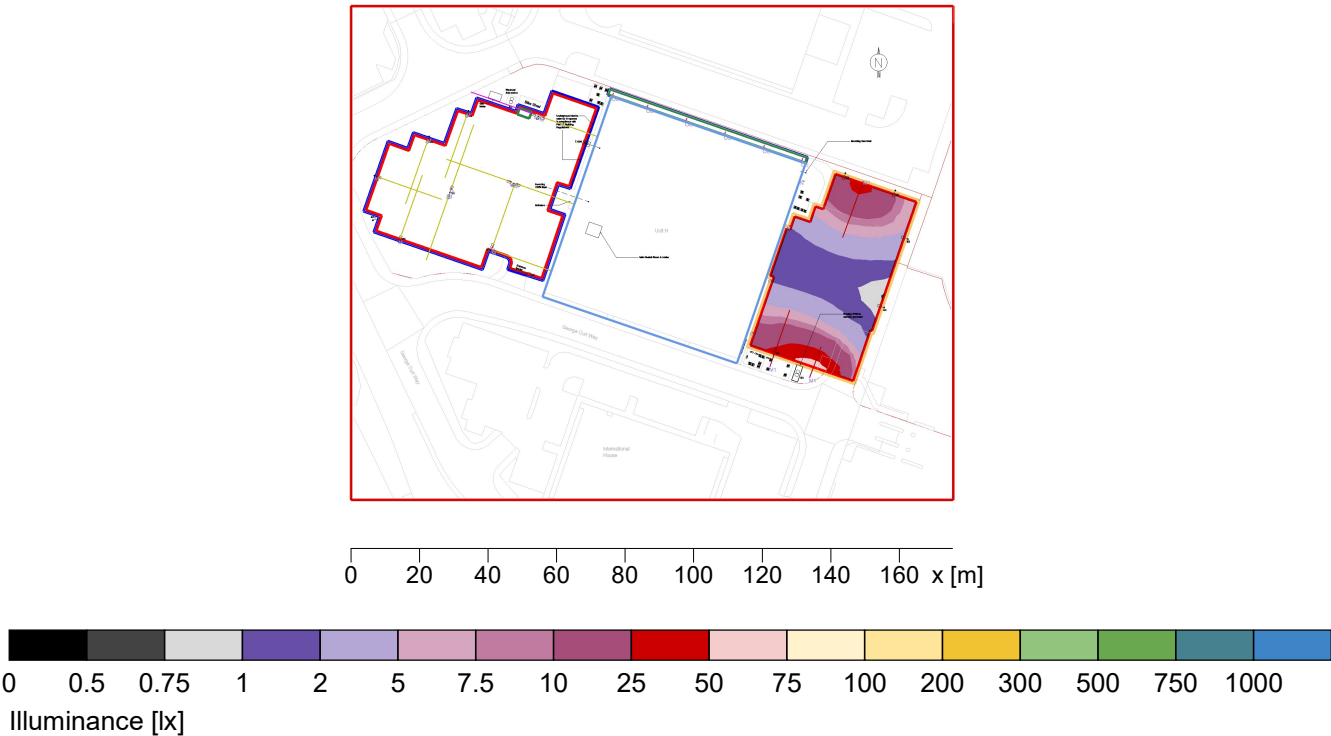

General

Calculation algorithm used	High indirect fraction
Maintenance factor	0.85
Total lamp luminous flux	11367 lm
Luminaire luminous flux	11363 lm
Total power	76.0 W
Total power per area (1821.89 m²)	0.04 W/m² (0.53 W/m²/100lx)

Airport Apron - Only columns active

User profile	Medium traffic, e.g. parking areas of department stores, office buildings, plants, sports and multipurpose building complexes
	5.9.2 (EN 12464-2, 05.2014) (Ra >20.00)
	Horizontal
$\bar{E}_m$	7.89 lx (>= 10 lx)
E_{min}	0.8 lx
$E_{min}/\bar{E}_m (U_o)$	0.10 (>= 0.25)
$E_{min}/E_{max} (U_d)$	0.01
Position	0.00 m

Type No. Make

Dextra Group PLC	
3	1 x
Order No. : OPUCE L133 R11 OA + S50	
Luminaire name : M1	
Equipment : 1 x Dextra 76 W / 11367 lm	
Emergency : 1014 lm (8.9 %)	
M1	