

LEGEND -

- External cavity wall (ECW 'A'), (ECW 'B'), (ECW 'C')
- Masonry internal wall (IWS 'B')
Fire Resistance: 30 minutes
- Non-loadbearing internal timber stud partitions (IWS 'C')
Fire Resistance: 30 minutes
- Existing walls
- SVP Soil and Vent pipe
- RWP Rainwater downpipe/Gully hopper
- Existing foulwater drainage
- New foulwater drainage
- Existing surfacewater drainage
- New surfacewater drainage
- AAV/RE Air Admittance Valve/Rodding Eye Access
- New levels
+ 9.850
Existing levels
+ 9.646
- (MS1) Alco E3024 Multi-Sensor Fire Alarm Optical/Heat
(MS2) Alco E3028 Multi-Sensor Heat and Carbon Monoxide Alarm
(HA) Alco E3024 Heat Alarm sensor detector
(CM) Alco Carbon Monoxide sensor detector



NOTES -

- Where existing walls are indicated to be removed; the existing wall, floor and roof structures are to be adequately supported. Prior to safe and careful removal, the existing structures are to be opened up and investigated further to ascertain if walls are loadbearing and confirm existing loading supports and detailing. Report findings to structural engineer/BCO. If walls are loadbearing, consult/refer to structural engineer's design and construction details/ specification for new structural beam/supports, to existing construction over. (All works subject to site investigation by structural engineer and confirmation of adequate structural support; to be approved by BCO).
- Finalisation of exact new foul/SW drainage route/connection/design etc to be established and confirmed on site following a site investigation and confirmation of the existing foul and SW drainage pipework/rm locations and routes by the contractor. Report findings to BCO, obtain approval from the BCO for foul + SW drainage works proposed prior to ordering and installation.
- Existing wall structure either side of new works to be opened up to check construction method, where new works abuts existing in all areas, if cavity construction maintain continuity of new cavity through to existing cavity, if solid construction internal wall face to be protected against damp penetration to provide a weather resistant structure, any movement joints requirements to structural engineers design and details.
- New structural beam/s to be concealed within new or existing first floor zone (where possible) to provide a flat ceiling appearance, to structural engineer's design and subject to site conditions.
- The main contractor is responsible for investigating and finding the exact location, direction and depth of all existing services ie gas, electric, water, communication, drainage etc and this is to be established on site upon commencement of works.
- Foundations within 1.0m of any drain to be taken down to invert level.
- Where existing walls are indicated for removal, consult with structural engineers for replacement support detail (if required) prior to careful safe removal.
- The Contractor is responsible for investigating and exposing the exact location and direction of existing internal/external foul drainage run(s)/svp/s, and this is to be established on site upon commencement of works. Upon completion of the investigation the exact run of new drainage will be confirmed with the BCO.
- All leadwork and leadwork flashings to be in accordance with manufacturers and Lead Sheet Association/The International Lead Association recommendations and technical guide-lines. Install appropriate cavity trays/ lead flashings/lead soakers, where required.
- Refer to structural engineer's details and calculations for all structural supports (steel/fitch/timber beams and posts/intels etc).
- Prior to commencement of works, Contractor to open up existing structure to establish and confirm which existing internal walls/walls are load-bearing, and direction of existing timber floor joists. Report findings to structural engineer/s.

For General and Construction notes, refer to drawings 0775-01.008/009/010/011

2
-

RP-Proposed Roof Plan
1:50

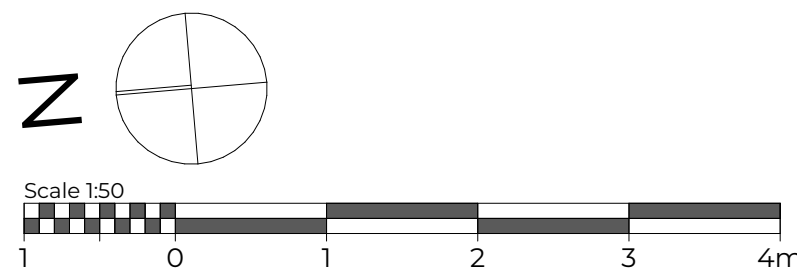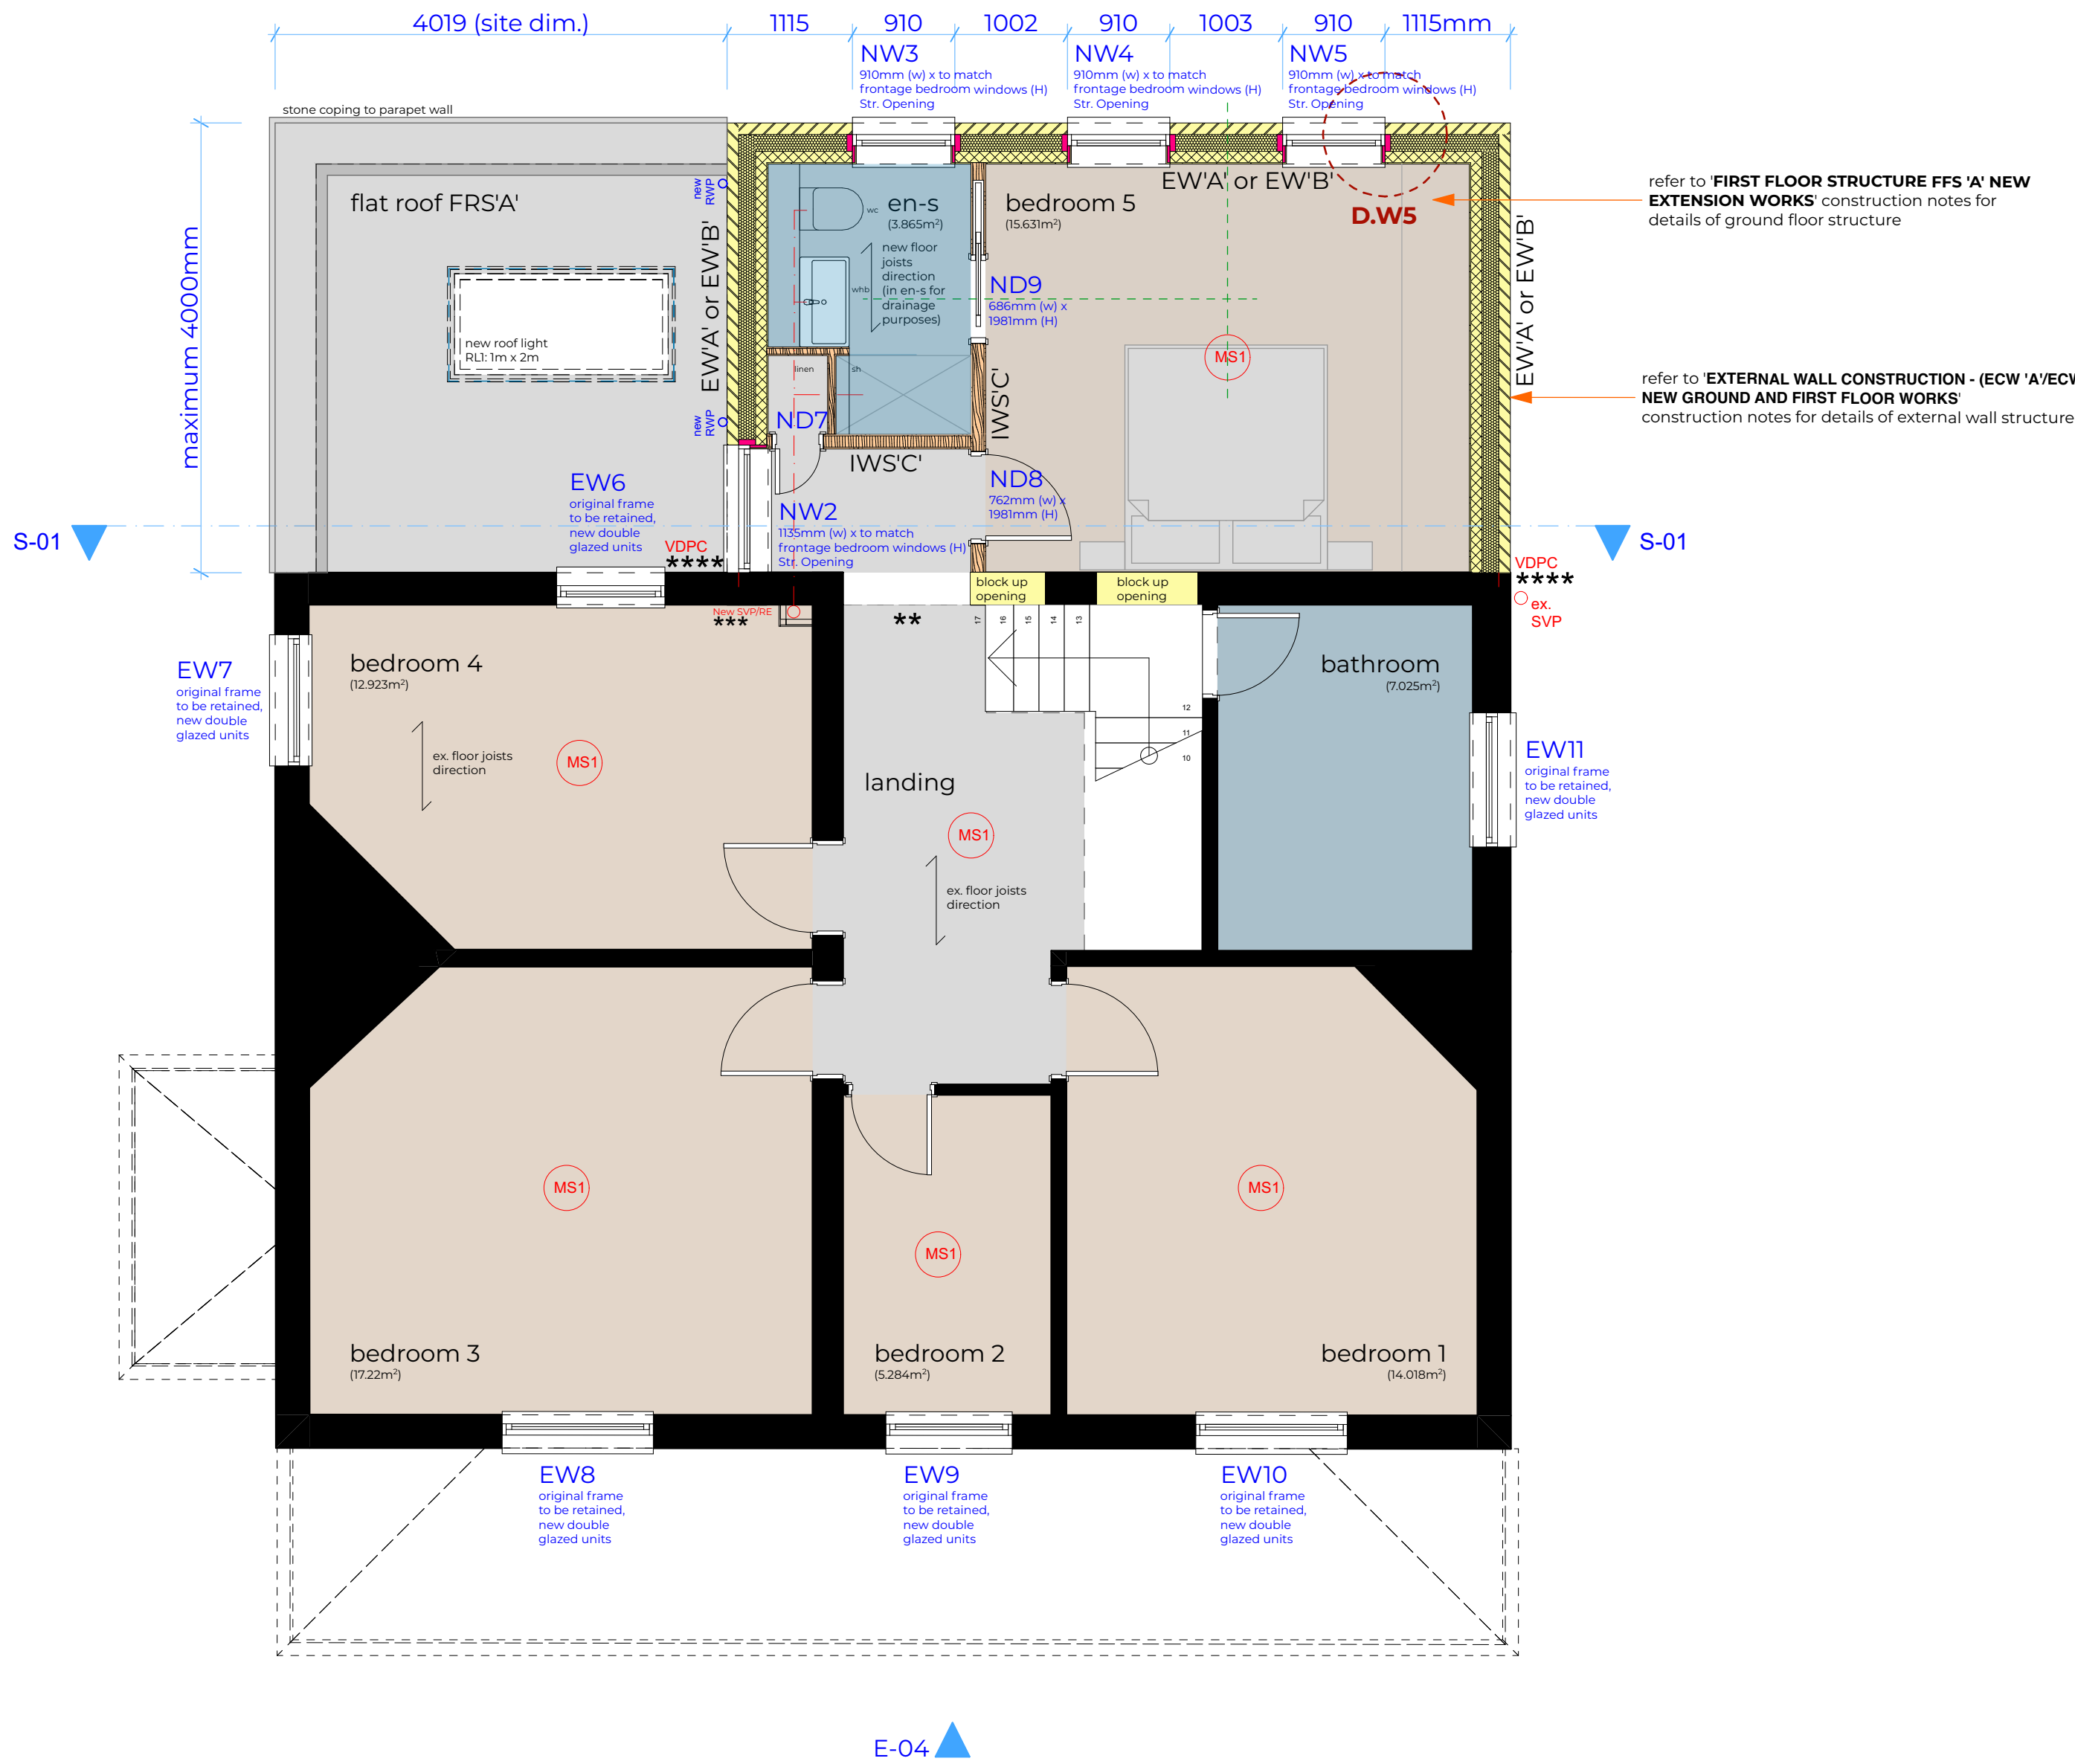

Mr. H. Phillips and Mrs. K. Phillips

Proposed Rear Extension
44 Winchester Street, Botley, Southampton.
SO30 2AA.

Proposed First Floor Level Plan and Roof Plan

14 September 2023 0775-01.005.01
1:50 A1

RevID	ChID	Transmittal Set Name	Date
01		Planning Application and Building Regulations Application	17/09/2023

☐ preliminary ☒ planning ☐ building regulations ☐ production
☐ tender ☐ construction ☐ as built ☐ other

The Steven Barlow Partnership
The Studio, 81 Manor Road,
Portsmouth, Hampshire. PO1 5LB,
United Kingdom.

+44 (0) 800 756 9776
info@tsbp-architecture.co.uk
tsbp-architecture.co.uk

This drawing is protected by copyright of THE STEVEN BARLOW PARTNERSHIP under The Copyright, Designs and Patents Act 1988 and the reproduction or use in any form without prior written consent from THE STEVEN BARLOW PARTNERSHIP will be an infringement of copyright.

Only the original drawing should be relied on. Plans are liable to distortion in transmission to the web. Do not scale off this drawing in any event except for planning application purposes. Figured dimensions must be used if in doubt contact THE STEVEN BARLOW PARTNERSHIP.

Contractor to check and verify all levels, datum's and dimensions on site and shall report any discrepancies or omissions to THE STEVEN BARLOW PARTNERSHIP prior to commencement of work and during construction phase. This drawing is to be read and understood in conjunction with structural, mechanical, electrical and/or any other consultants' documentation as may be applicable to the project prior to the commencement of work and its duration.

This drawing including notes has been prepared and produced for the client named for the project detailed and solely for the purposes indicated and is not intended for use by any other person or for any other purpose.

© Copyright 2023 The Steven Barlow Partnership (TSBP Architecture)
Chartered Institute of Architectural Technologists Chartered Practice
Principal - Steven V. Barlow FCIT

1
-

FFL-Proposed First Floor Plan
1:50