



Terry Step Lift (TSL) range

Simple and practical solution to accessing a home



TSL 500



TSL 1000W

Our **Terry Step Lift (TSL) range** offer an easy solution for wheelchair access to and from a domestic property. The lifts are versatile and flexible, and our experienced engineers can install a TSL in less than a day.

A ramp may not always be a feasible option due to lack of space or not enough length to achieve the required gradient. Terry Step Lifts provide a safe and reliable way to gain independent access into and out of a domestic property.

Three models are available to cater for every need. The TSL 500 and 1000 have a load capacity of 250 kg and they can travel up to 500 and 1000 mm respectively (or 960 mm, when a triple bridging step unit is supplied). The TSL 1000W, a wider model, is designed to carry heavy wheelchairs and bariatric users. It has a load capacity of 385 kg* with a maximum travel height of 1000 mm.

Consisting of a self-contained unit, Terry Step Lifts are suitable for mounting on a flat 100 mm concrete base and are quick to install. Bridging steps can be added allowing easy pedestrian access via the same doorway.

Terry Step Lifts at a glance

- **Quickly installed** by our engineers in less than a day
- **Versatile solution** with a choice of bridging steps or upper level gate protection
- Can be **easily re-sited** and often a cheaper option than a ramp
- **Safe, reliable and easy to use**
- **Large load capacity TSL 1000W model available (325kg)** ideal for bariatric users
- **Manufactured in the UK** to BS 6440 standard



TSL 1000

* Excluding bridging steps

TSL Standard Specification


TSL 500		TSL 1000		TSL 1000W			
Application range		Sited internally or externally, for wheelchair users only					
Max safe working load		250 kg		250 kg		385 kg	
Max travel		500 mm		1000 mm		1000 mm	
Platform width		800 mm		800 mm		1100 mm	
Options		Handrails Single step bridging Upper gate interlock kit Upper gate and interlock Remote up/down control Remote control enabler		900 mm wide version Single, double or triple step bridging Upper gate interlock kit Upper gate and interlock Remote up/down control Pit installation (indoor only)		Steel or plexi-glass side infills Remotely located call stations Stainless steel in lieu of black powder coat paint finish Upper gate interlock kit Upper gate and interlock Remote up/down control Bridging steps 900mm wide	
Closed height		75 mm					
Power supply electrical requirements		220 / 240 V~50 / 60 Hz-13 A single phase					
Low voltage control system		24 V DC					
Operating temperature range		-5°C to +40°C					
Safety		Automatic wheelchair arrestor mechanism and full battery back-up. Constant pressure controls. Underside safety surface.					
Drive		Hydraulic scissor mechanism					
N.B. Maximum load, travel and dimensions may alter subject to lift specification. This would be determined with a survey.							



Dimensions


All dimensions in mm

TSL 500

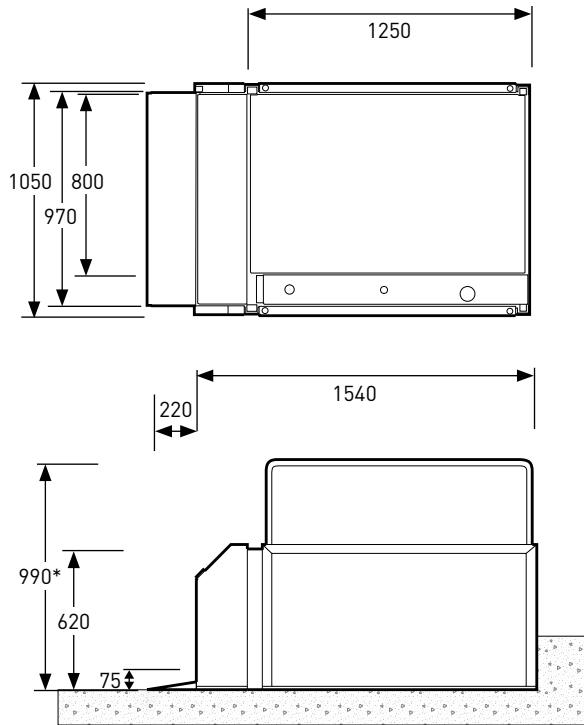


*Handrails shown are an optional extra

TSL 1000

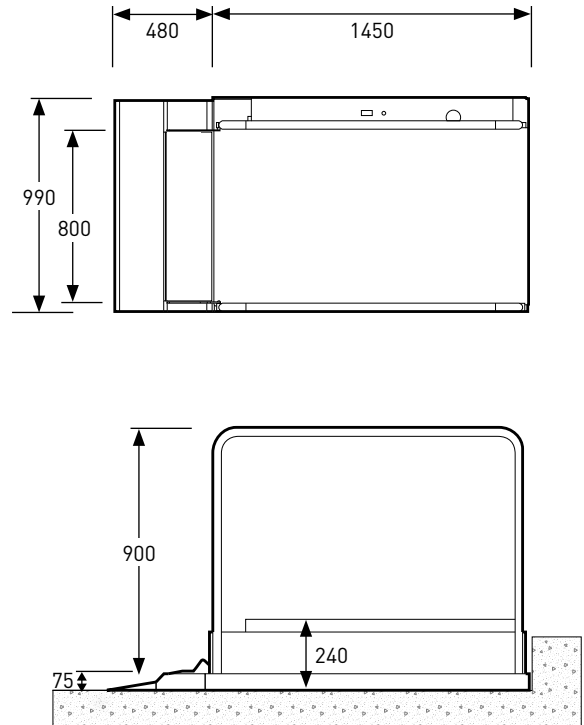

TSL 1000W

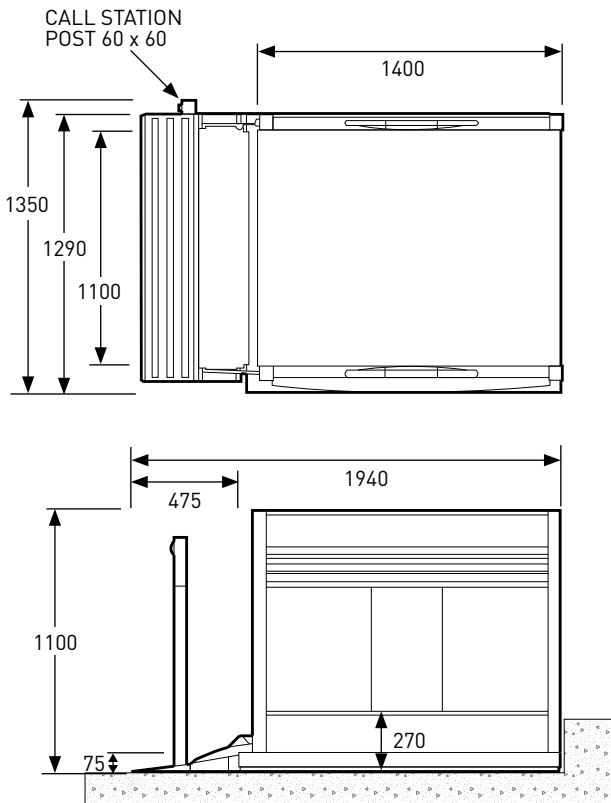

The Terry Lifts Guarantee



- ✓ **Certification:** ISO 9001:2015, ISO 14001:2015 and OHSAS 18001:2007
- ✓ **Safety:** Full safety features
- ✓ **Compliance:** British Standard BS6440:2011, and is CE marked
- ✓ **Origin:** Designed & manufactured in Great Britain with over 50 years' experience

Call us today on: **0345 365 5366**
or e-mail: **sales@terrylifts.co.uk**



Terry
total lift solutions

Terry Group Ltd.,
Longridge Trading Estate,
Knutsford, Cheshire, WA16 8PR.
Tel. (outside UK): +44 (0)1565 650 376
www.terrylifts.co.uk



Issue date: 5/2018