



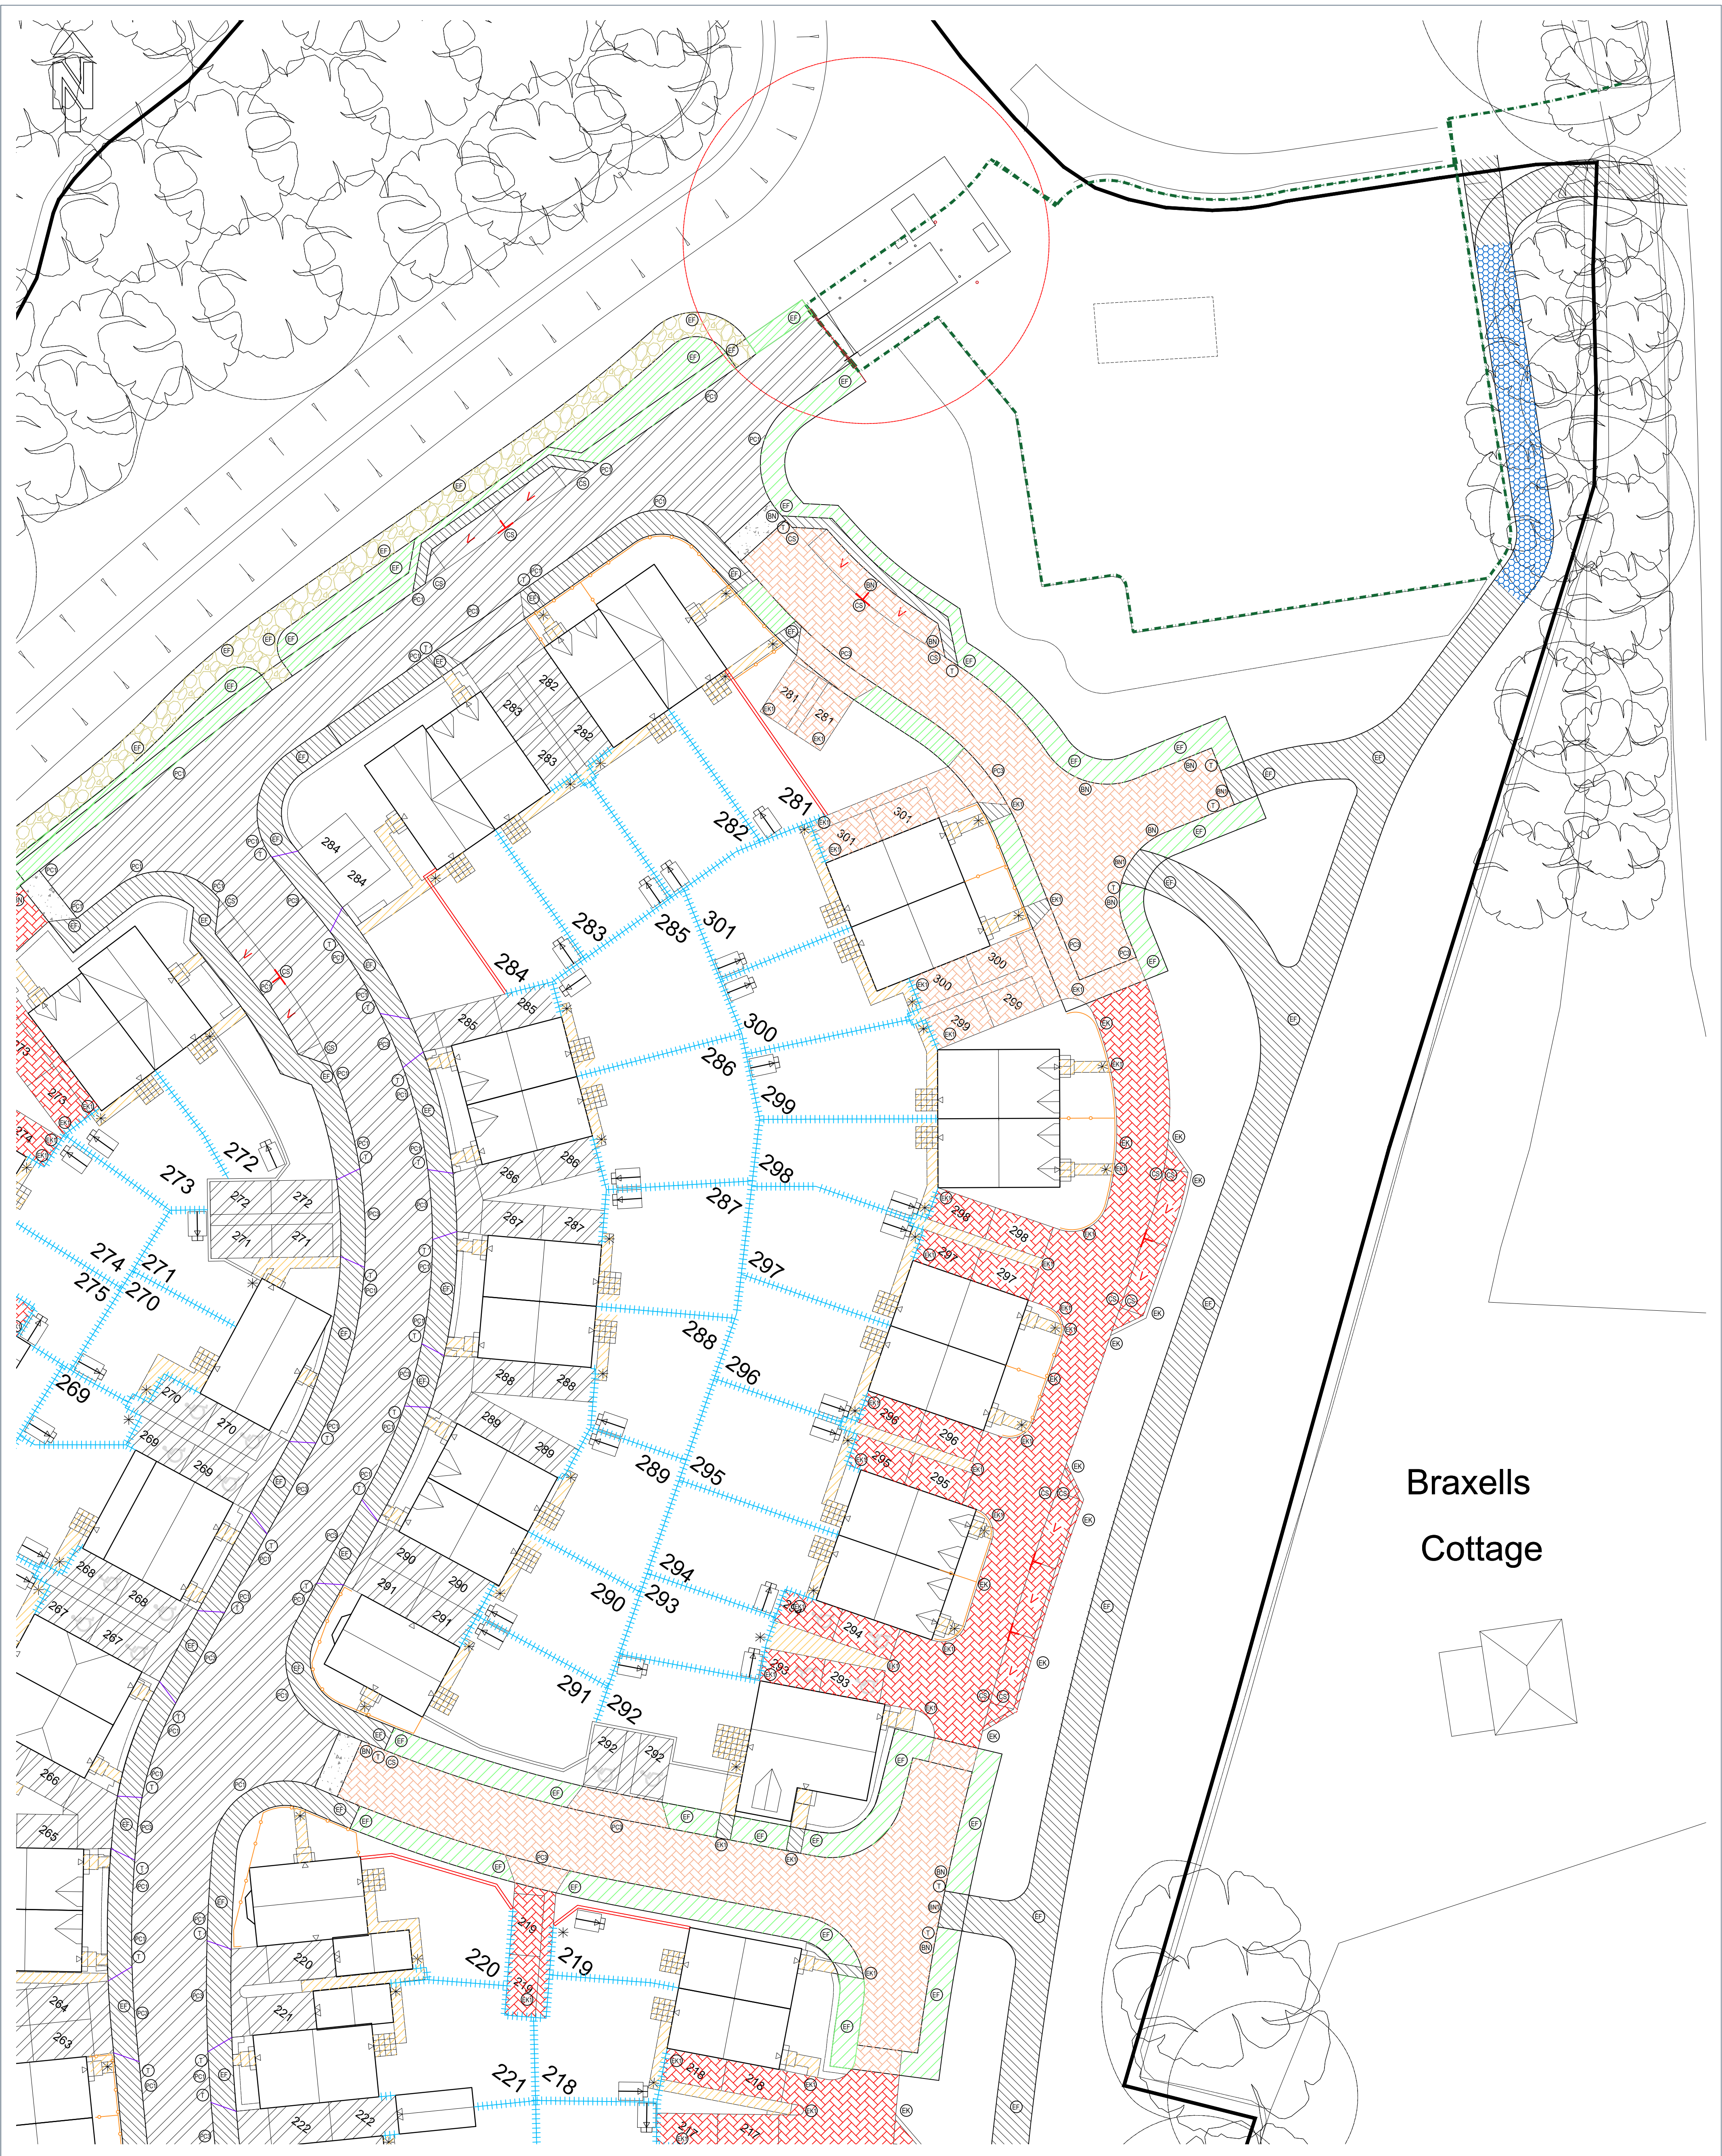

Braxells
Cottage

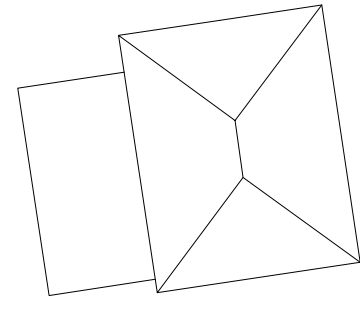

Road construction

Footpath construction

Proposed tegular block paving 80mm thick in Traditional laid in stretcher pond pattern. From Marshalls or similar and approved.

Proposed tegular block paving in burnt ochre laid in stretcher bond pattern 80mm thick on roads and 60mm for private drives. From Marshalls or similar and approved.

Proposed Ramp

Proposed grey paving 450x450mm n natural laid in chequerboard pattern. From Marshalls or similar and approved.

Proposed amber Breedon gravel path with timber edging. No dig construction within RPAs.

Grass Verge

Grasscrete

1.8m Close Board Fence

1.8m Larch Lap Fence

1.2m Garden Railings

1.2m Estate Railings

1.8m Brick Wall

Gate

Bollard

REV	DESCRIPTION	SIG	CHK	DATE
P01	First Issue.	GT	CB	16.11.2022
P02	Updated to suit client's comments.	CB	-	05.04.2023
P03	Parking space delineation added.	CB	-	30.11.2023

Type HB2 kerb to HCC11/C1010

Type BN with 25mm Upstand to HCC11/C1010

CS1 Channel Kerb (on edge)

Transition Kerbs

Kerb Type PC1 (BN150) (50mm face)

Kerb Type PC1 (BN150) (flush)

EBN Edging Kerb (25mm face)

EBN Edging Kerb (0-6mm face)

Type EF concrete Edging to M434/15

50x1500x750mm 'T' Parking indicator; White thermoplastic road marking.

500mm high Visitors Parking; White thermoplastic road marking.

MILLER HOMES

PHASE 2 (1E)
BOORLEY GARDENS

EXTERNAL WORKS
SHEET 4

St Andrew's House
23 Kingfield Road
Sheffield, S11 9AS

T: 0114 255 4554
E: mail@eastwoodce.com
eastwoodce.com

ECE PROJECT No
46130

SCALE AT A1
1:250

STATUS
S0

SUITABLE FOR
Initial

DRAWING NUMBER
46130 - ECE - XX - XX - DR - C - 510

REV
P03

Project

Originator

Zone

Level

Type

Role

Number