


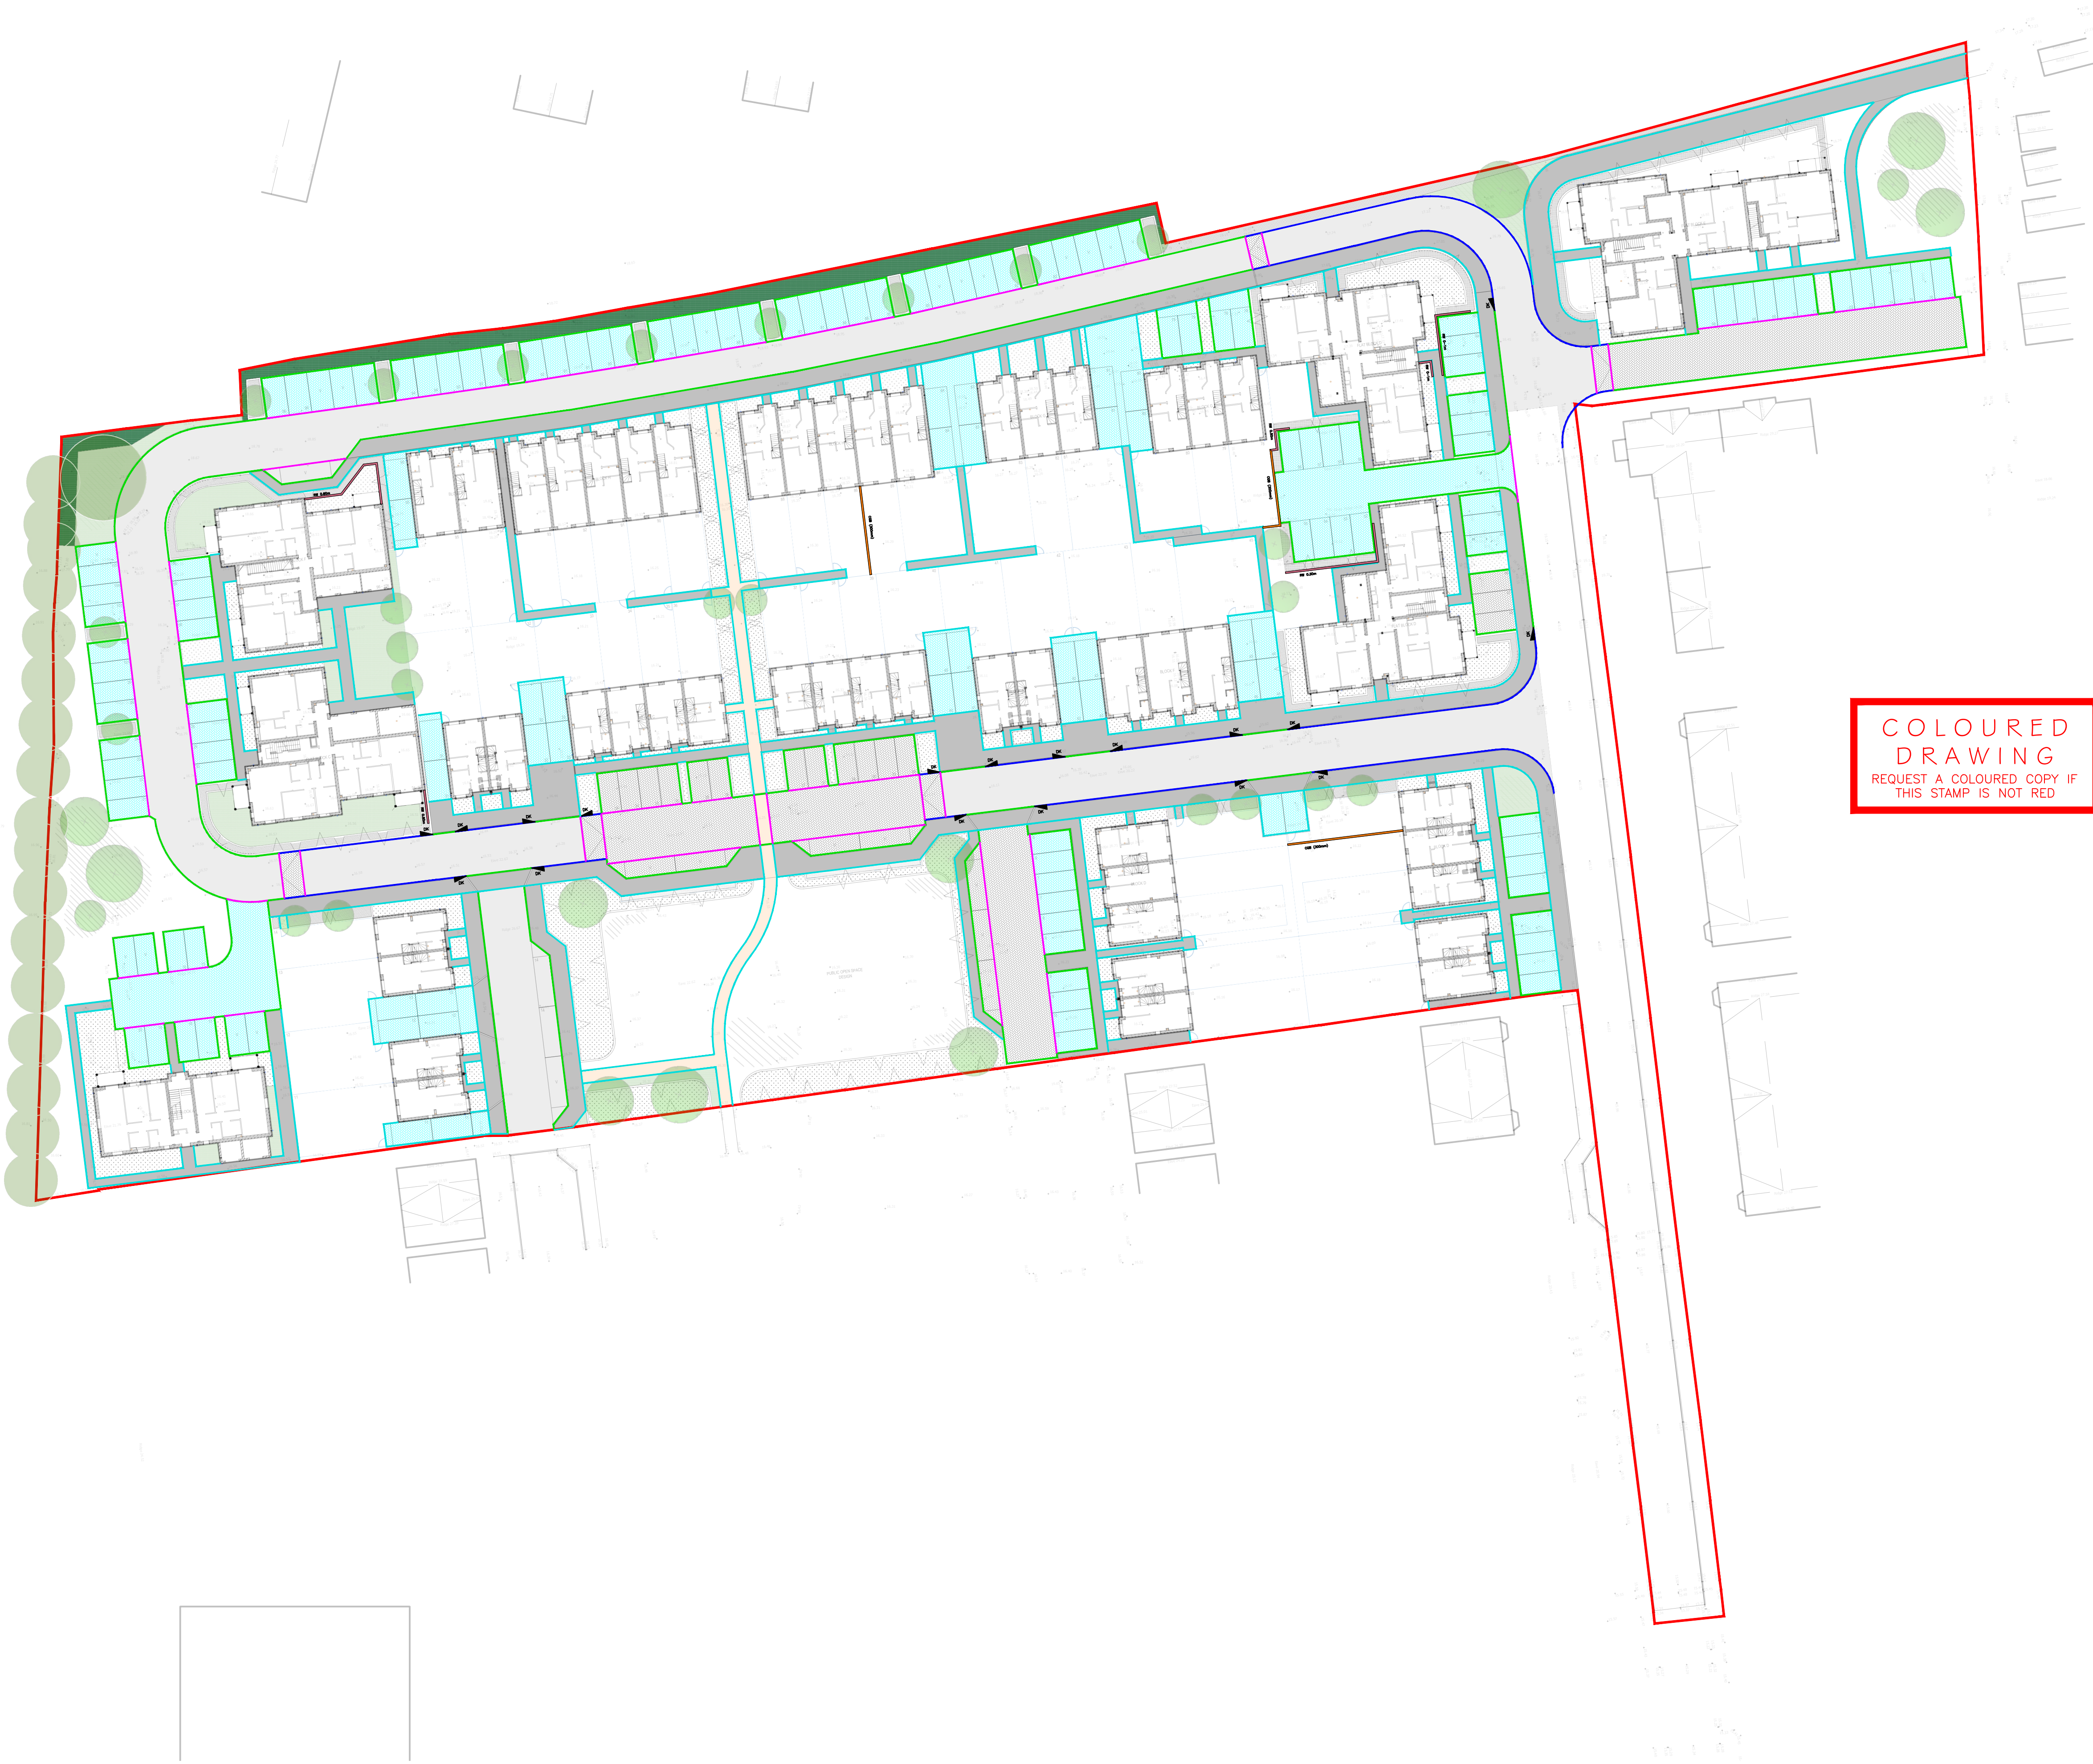

NOTES

© This drawing is the copyright of ARCH Associates Limited. It may not be copied, altered or reproduced without their written authority. This drawing must not be scaled. IF IN DOUBT ASK.

- GENERAL NOTES
1. THIS DRAWING IS TO BE READ IN CONJUNCTION WITH ALL RELEVANT ARCHITECTS, ENGINEERS AND SPECIALISTS DRAWINGS AND DETAILS.
 2. ALL FIGURED DIMENSIONS TO BE TAKEN IN PREFERENCE TO SCALED DIMENSIONS.
 3. ANY DISCREPANCIES BETWEEN THIS DRAWING AND OTHER INFORMATION IS TO BE BROUGHT TO THE ATTENTION OF THE ENGINEER PRIOR TO THE COMMENCEMENT OF THE WORKS ON SITE.
 4. THE MAIN CONTRACTOR SHALL BE RESPONSIBLE FOR THE SETTING OUT AND ACCURACY OF ALL DIMENSIONS.
 5. THE CONTRACTOR IS TO ENSURE THE STABILITY AND STRUCTURAL INTEGRITY OF THE EXISTING PROPERTY AT ALL TIMES DURING WORKS AND IS TO BE RESPONSIBLE FOR ALL PROPPING AND SHORING AS REQUIRED.
 6. MAIN CONTRACTOR TO PROVIDE AND FIX SUITABLE BRACING AND PROPPING FOR ALL ELEMENTS IN THE TEMPORARY CONDITION DURING CONSTRUCTION STAGE, SUCH AS TO ENSURE STRUCTURE STABILITY AT ALL TIMES.
 7. IT IS THE CONTRACTORS SOLE RESPONSIBILITY FOR ASCERTAINING SAFE DISPOSAL OF ANY OFF-SITE EXCAVATED SPOIL. NO CLAIM RESULTING FROM ABNORMAL TIP REQUIREMENTS WILL BE ENTERTAINED.

- HIGHWAYS
1. ALL WORKS TO COMPLY WITH RELEVANT COUNTY COUNCIL OR LOCAL AUTHORITY SPECIFICATION, AS REQUIRED.
 2. ALL DRAINAGE WORKS IN ADOPTABLE AREAS TO BE IN ACCORDANCE WITH WATER AUTHORITY ASSOCIATION 'SEWERS FOR ADOPTION' – 7th EDITION.

KEY TO HEALTH AND SAFETY SYMBOLS

THESE NOTES ARE BASED ON THE USE OF EXPERIENCED AND COMPETENT CONTRACTORS CARRYING OUT THE WORK USING AN APPROVED SAFE METHOD OF WORKING

- INDICATES A RESIDUAL RISK REQUIRING A COMPULSORY ACTION
- INDICATES A RESIDUAL RISK REQUIRING A PROHIBITIVE ACTION
- INDICATES A RESIDUAL RISK AS A WARNING
- INDICATES A RESIDUAL RISK FOR INFORMATION

LEGEND

- TRANSITION KERB
- PRECAST CONCRETE HALF BATTERED KERB WITH 100mm UPSTAND (FOR DETAILS REFER TO FHL014-550)
- PRECAST CONCRETE BULLNOSE KERB WITH 25mm UPSTAND (FOR DETAILS REFER TO FHL014-550)
- PRECAST CONCRETE CHANNEL KERB LAID FLUSH (FOR DETAILS REFER TO FHL014-550)
- PRECAST CONCRETE EDGING KERB LAID FLUSH
- FULL DEPTH ASPHALT CARRIAGEWAY TO NHBC CHAPTER 10.2.6 TABLE 2A.
- FULL DEPTH ASPHALT FOOTWAY TO NHBC CHAPTER 10.2.6 TABLE 2A.
- PERMEABLE BLOCK PAVING WITH 30% VOID MATERIAL SUBBASE TO INFILTRATE INTO EXISTING STRATA. LAID IN HERRINGBONE PATTERN, COLOUR TO BE CONFIRMED.
- IMPERMEABLE BLOCK PAVING TO NHBC CHAPTER 10.2.6 TABLE 2A. (LAID IN HERRINGBONE PATTERN, COLOUR TBC.

P01	04.09.2023	PRELIMINARY ISSUE FOR COMMENT	TA
Rev.	Date	Description	By

01489 890004
admin@archassociates.co.uk
www.archassociates.co.uk

Client
FOREMAN HOMES

Architect
KSA ARCHITECTS LTD.

Project title
TOYNBEE ROAD,
EASTLEIGH.

Drawing title
**KERBING LAYOUT
GENERAL ARRANGEMENT,
SHEET 4.**

Scale	Paper size	Date	Drawn by	Checked by	Status
1:400	A1	SEP 2023	TA	CH	S3

Name	Project code	Originator	Functional	Spatial	Form	Number	Revision

FHL014 - AAL - EW - XX - DP - C -5007- P01