





- GENERAL NOTES:
1. All dimensions to be checked on site. All details and dimensions relating to sub-Contractors work must be checked and agreed between the sub-Contractor or supplier and the general Contractor.
  2. This drawing is to be read in conjunction with all relevant Architect's and Engineer's drawings and specification.
  3. The main Contractor is responsible for ensuring the stability of the structure whilst the works are in progress.
  4. Any information given regarding existing underground services is given in good faith after consultation with the relevant authority. No liability is accepted by the Consultant and the main Contractor is responsible for obtaining and checking all information and taking due care and attention whilst undertaking the works.

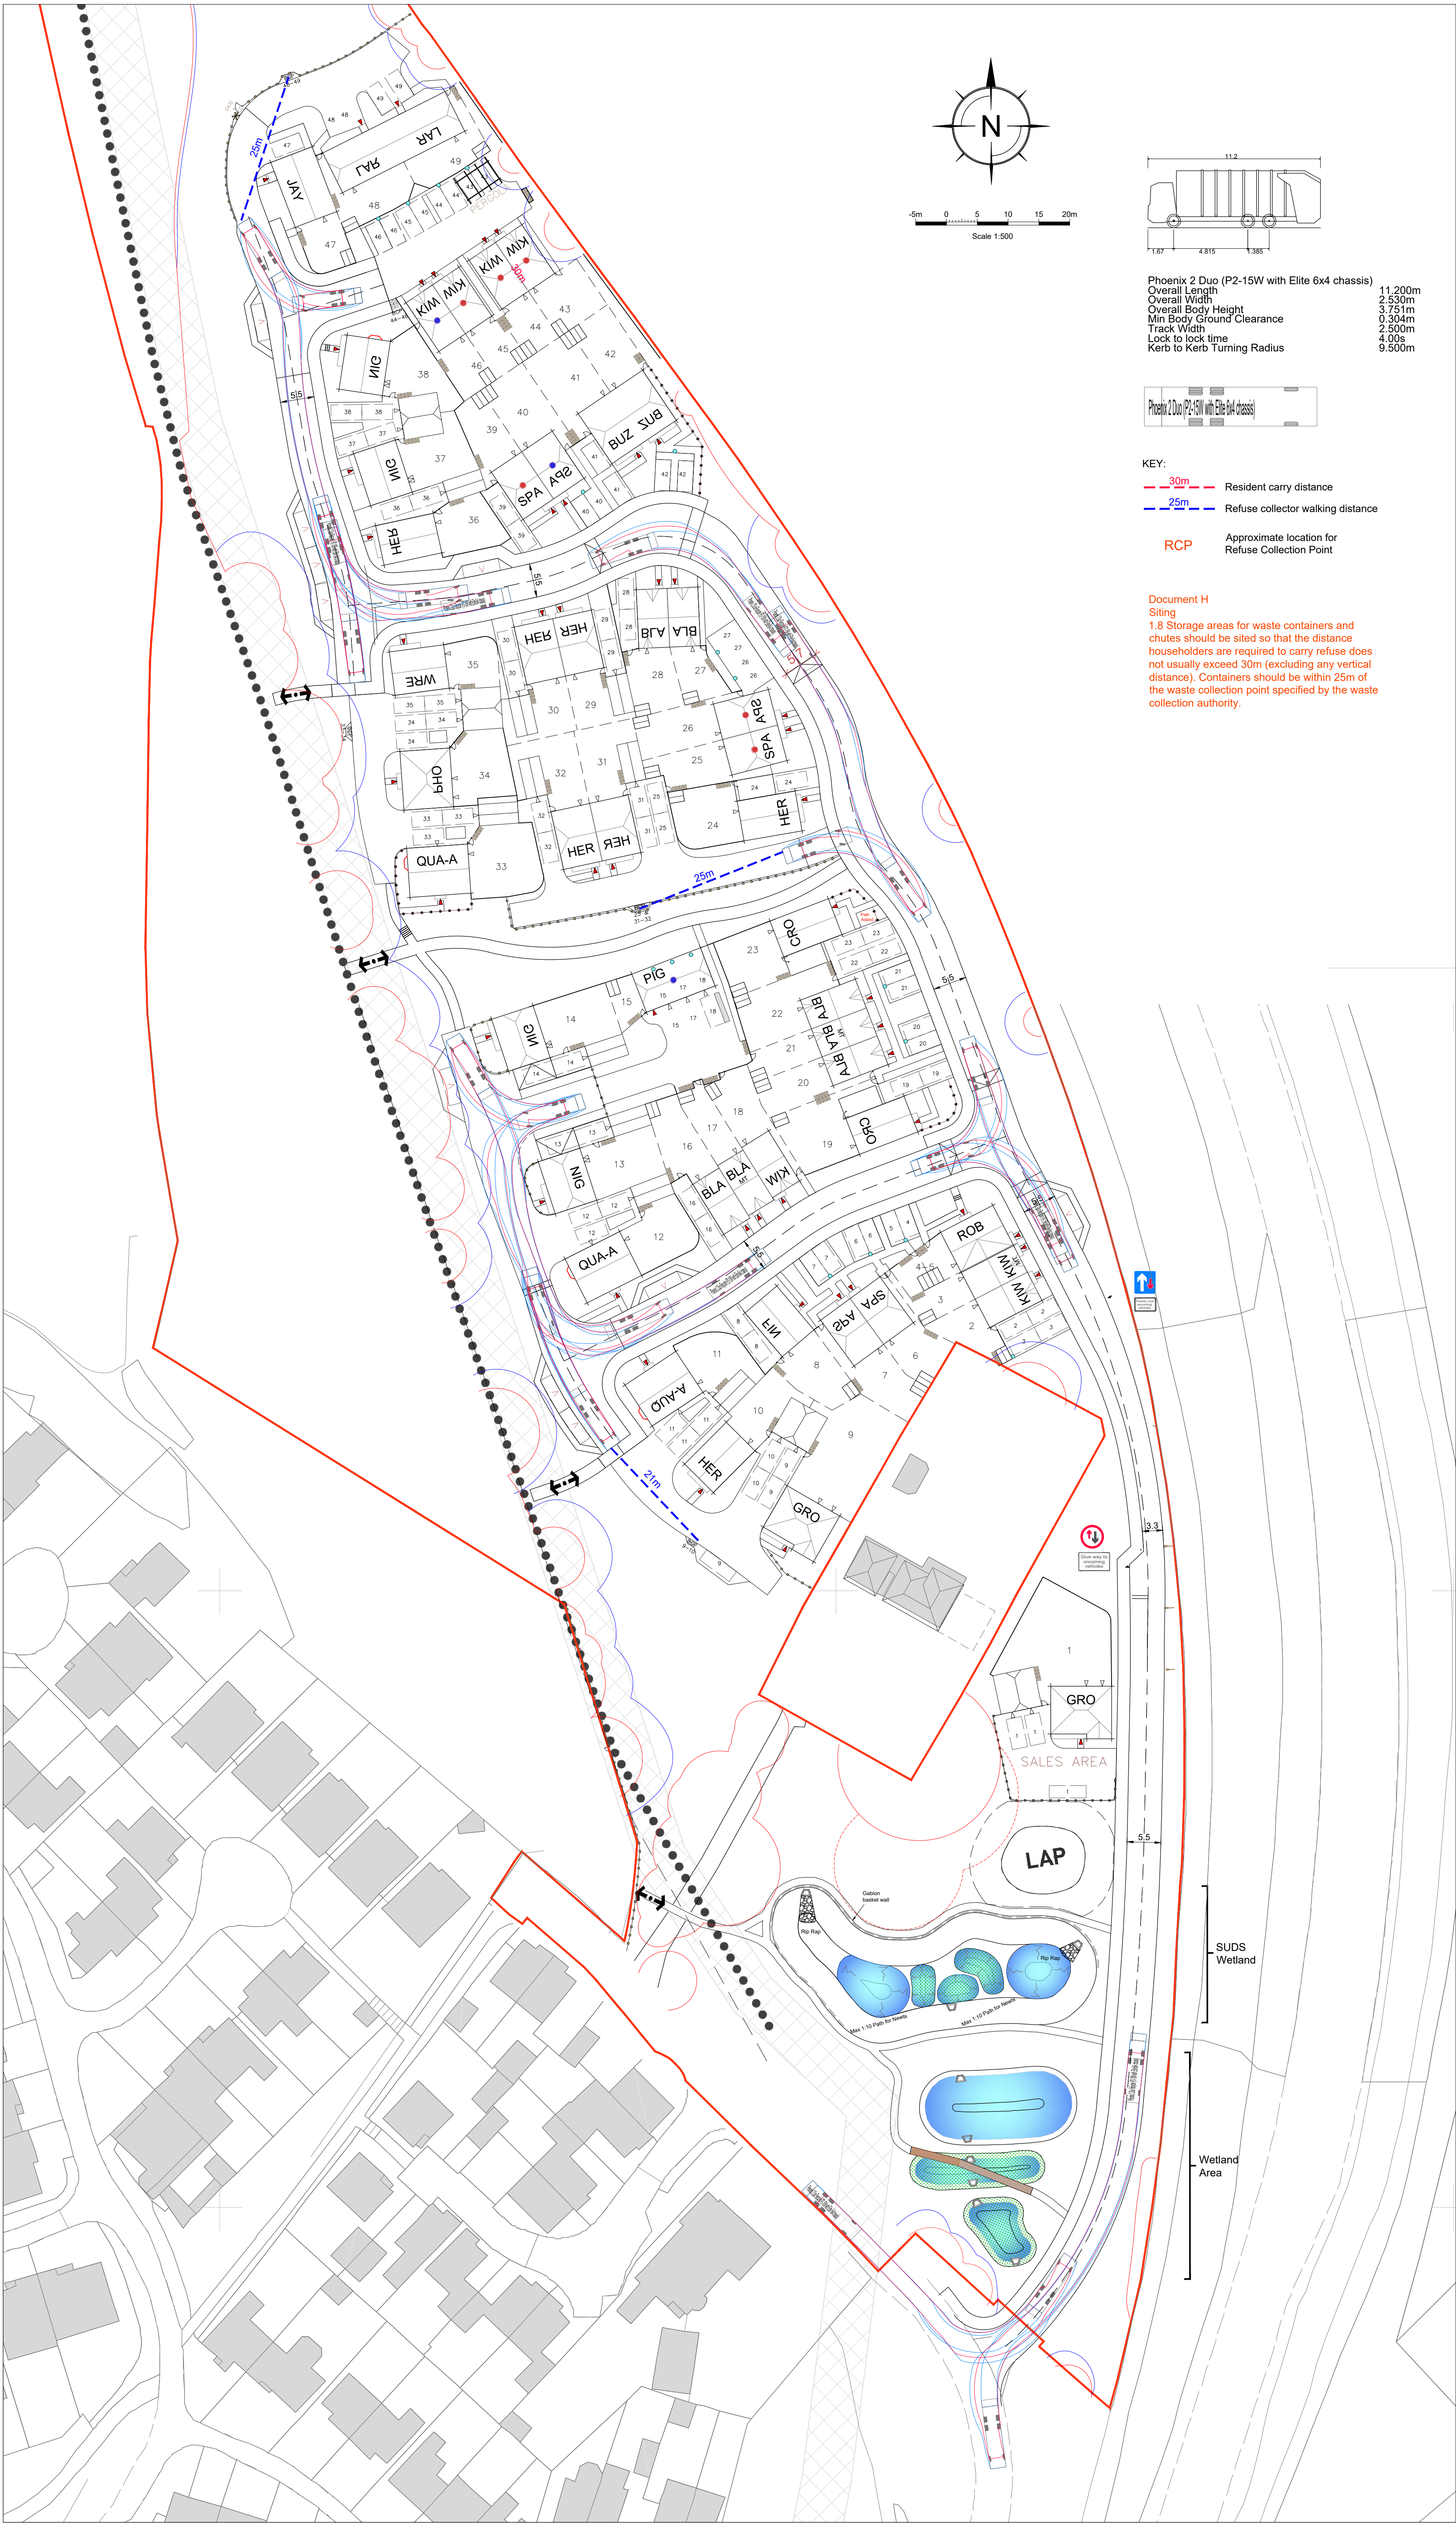

Phoenix 2 Duo (P2-15W with Elite 6x4 chassis)  
Overall Length 11.200m  
Overall Width 2.530m  
Overall Body Height 3.751m  
Min Body Ground Clearance 0.304m  
Track Width 2.500m  
Lock to lock time 4.00s  
Kerb to Kerb Turning Radius 9.500m

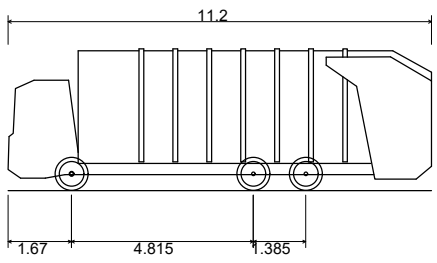

- KEY:
- 30m Resident carry distance
  - 25m Refuse collector walking distance
  - RCP Approximate location for Refuse Collection Point

Document H  
Siting  
1.8 Storage areas for waste containers and chutes should be sited so that the distance householders are required to carry refuse does not usually exceed 30m (excluding any vertical distance). Containers should be within 25m of the waste collection point specified by the waste collection authority.

|     |          |     |                                 |     |
|-----|----------|-----|---------------------------------|-----|
| E   | 31.01.25 | MJP | Vehicle tracking updated        | SRM |
| D   | 30.01.25 | MJP | Vehicle tracking updated        | SRM |
| C   | 18.10.24 | MJP | Updated site layout plan        | SRM |
| B   | 31.10.23 | MJP | Updated Road 1 to IT layout     | SRM |
| A   | 30.10.23 | MJP | Updated carriageway and footway | SRM |
| REV | DATE     | INT | DESCRIPTION                     | CHK |

Issue Status FOR APPROVAL

**The Civil Engineering Practice**  
11 Tungsten Building  
George Street  
Fishergate  
Sussex  
BN41 1RA  
01273 424424  
reception@civil.co.uk  
www.civil.co.uk

CLIENT Bargate Homes  
PROJECT Knowle Hill, Albrook, Eastleigh  
TITLE Site Layout, Refuse Vehicle Tracking

|          |            |         |          |             |       |
|----------|------------|---------|----------|-------------|-------|
| DRAWN    | M Pacifico | DATE    | Oct 2024 | PROJECT NO. | 23823 |
| ENGINEER | S Magowan  | CHECKED |          | DRG NO.     | REV   |
| SCALE    | 1:500 @ A1 |         |          | 17          | E     |