


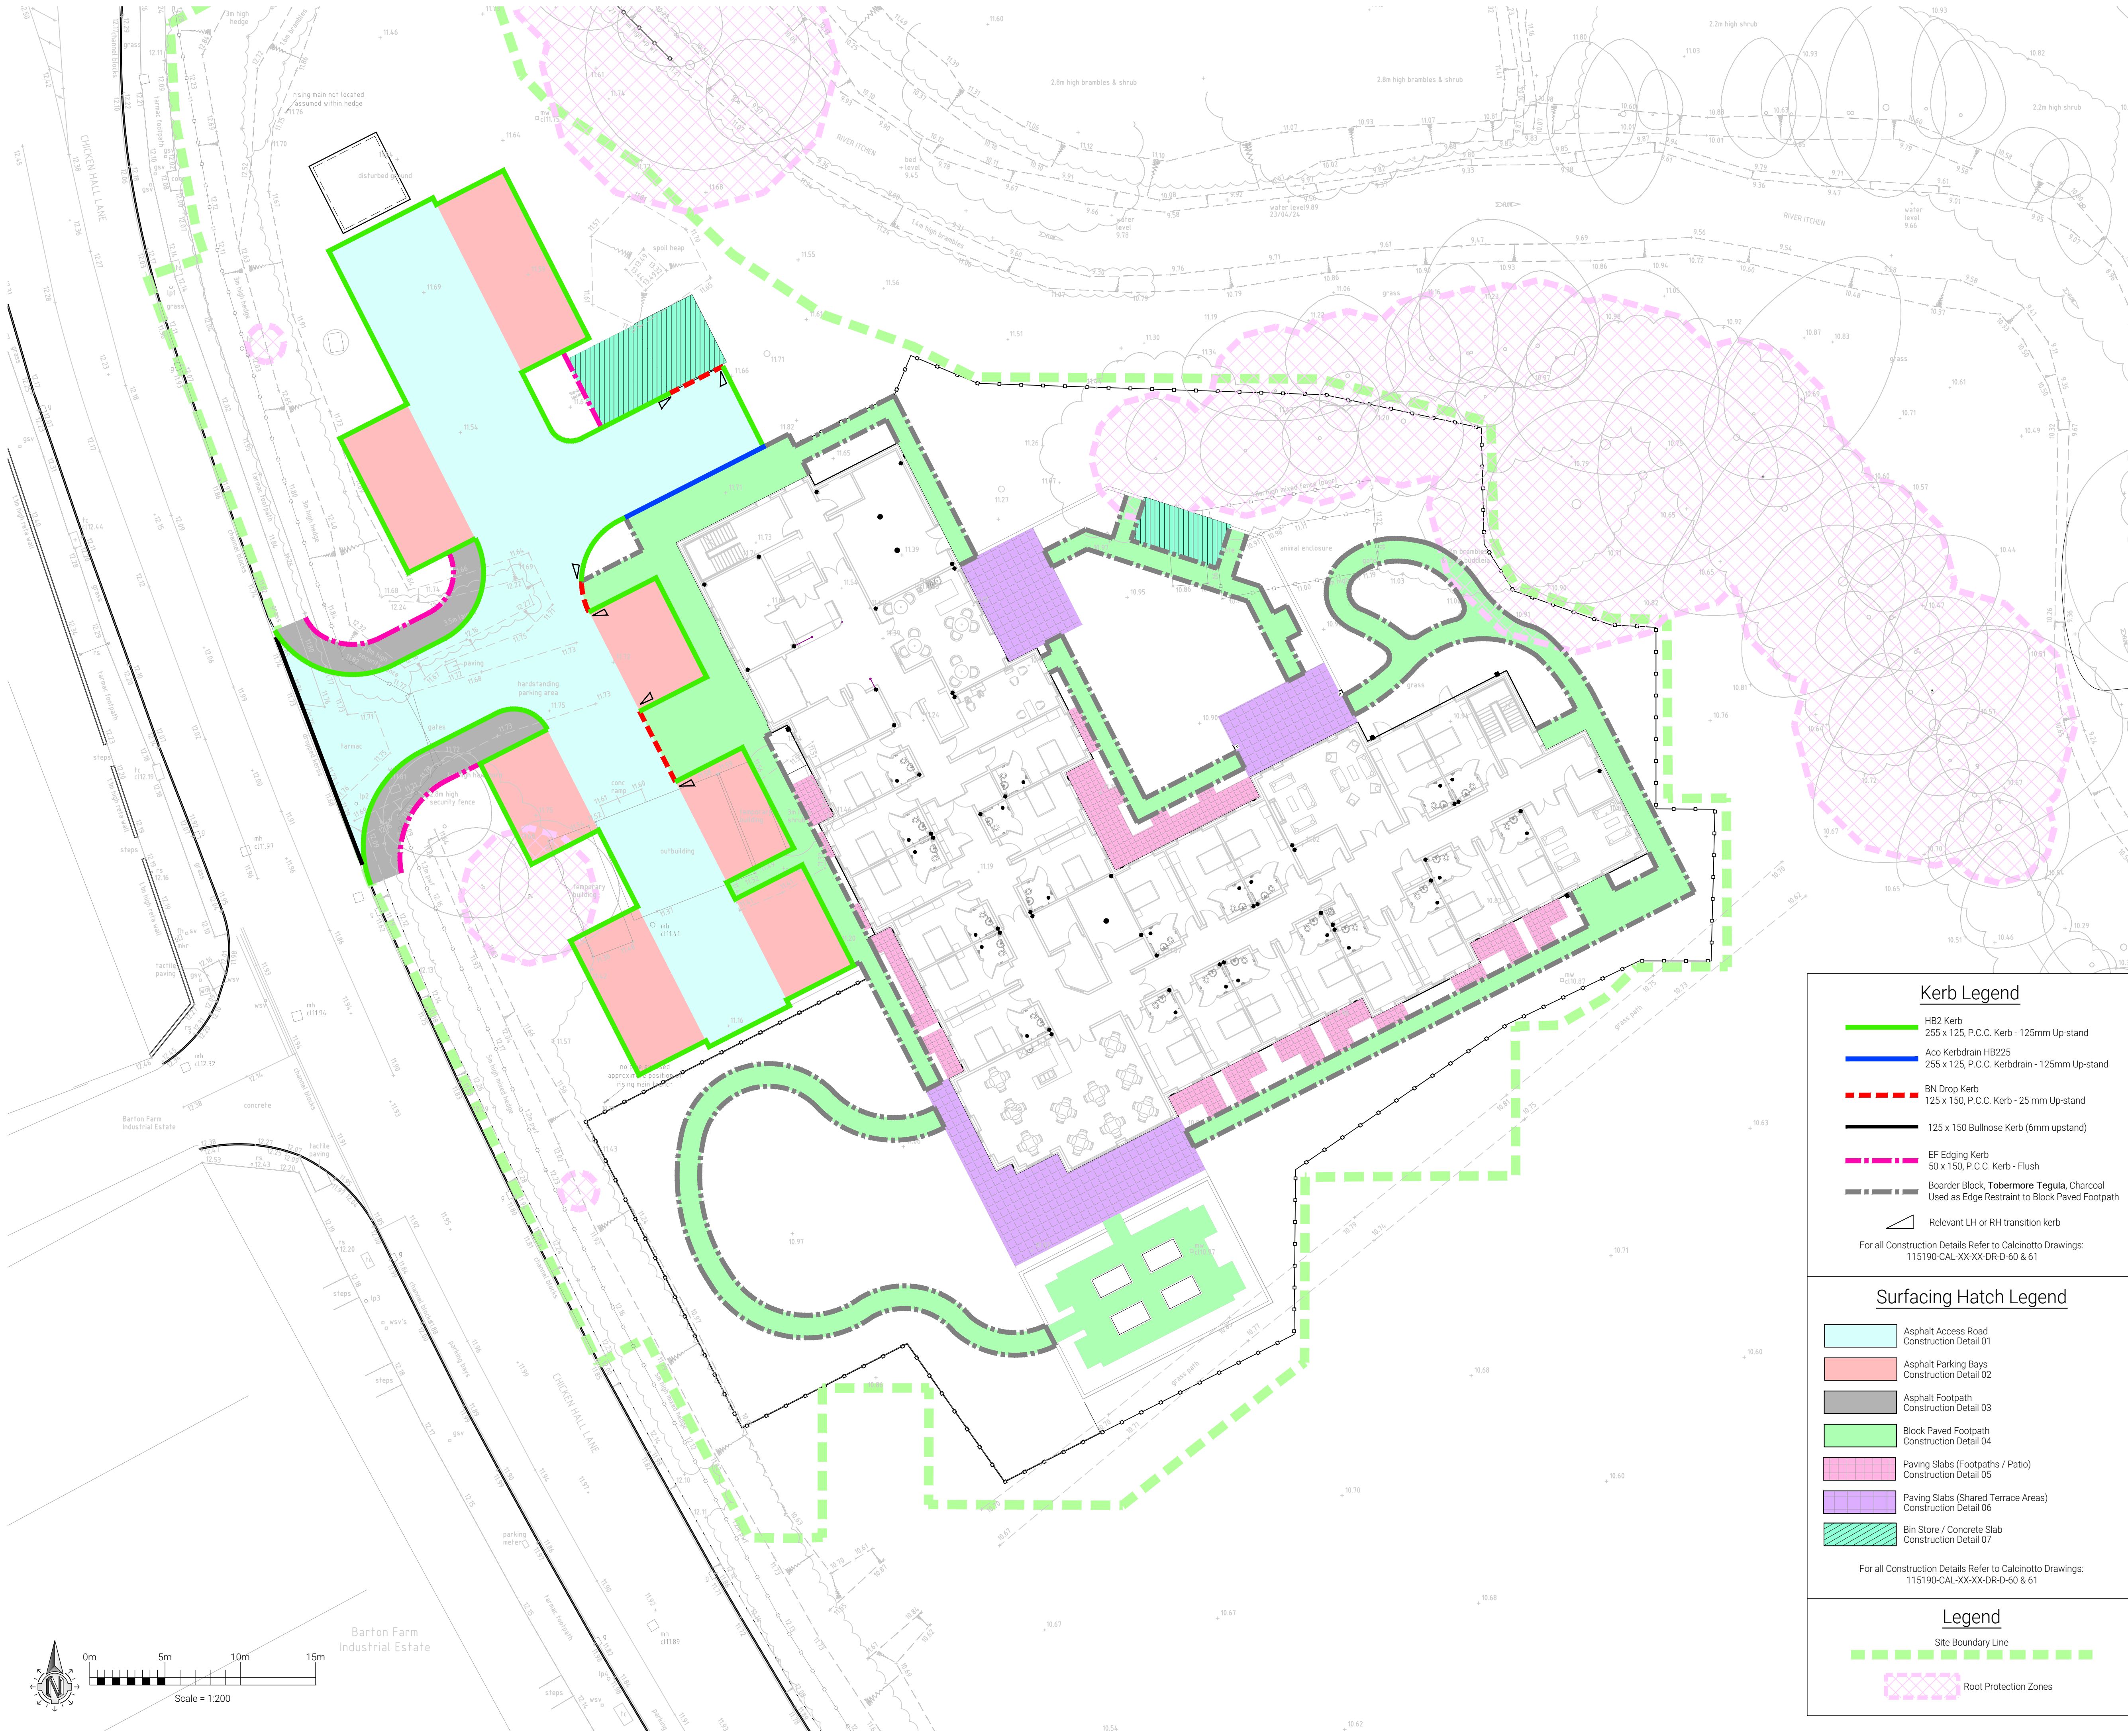

- Notes:
- This drawing is to be read in conjunction with all relevant architects, engineers and specialist sub-contractors drawings and the specification.
 - All setting out to be in accordance with the architects drawings. Any discrepancies between the engineers and the architects drawings to be referred to the architect before proceeding. Dimensions must not be scaled.
 - All asphalt concrete materials to be provided and laid in accordance with EN13108-1 and 5, BS 594987:2007 and PD6691:2007.
 - Earthworks shall be in accordance with the Highway Authority Specification for Highway Works' series 600 with particular emphasis on 601, 602, 604, 608, 612, 613, 616 and 617.
 - Capping layer material to be in accordance with the Highway Authority Specification for Highway Works' table 6/1, 6/2 and 6/4. contractor to provide certificates to confirm compliance.
 - Well graded crushed material to be clean and free of plastic, metal, plaster etc, passing a 75mm screen on compacting plant and graded to have a uniformity coefficient greater than 10. contractor to provide certificates to confirm compliance.
 - Contractor to allow for all works on the public highway to be in accordance with the local Highway Authority requirements. contractor to allow for applying for all road opening licence's and paying all necessary fees.
 - Insitu concrete paving to be in accordance with BS 8500-1 and BS EN 206-1.
 - Reinforcement to be to BS 4449, 4483 and 6744. Cutting and bending to BS 8666.
 - All highways macadam materials to be in accordance with the Highways Agency Specification for Highway Works' series 900 for roads and series 1100 for footways.
 - All precast concrete kerbs, channels, edgings and quadrants to be manufactured and laid in accordance with BS EN 1340 - 2003.
 - All pavements constructed with concrete, clay or natural stone pavers to be in accordance with BS 7533 all relevant parts.
 - Concrete block pavers including permeable blocks to be in accordance with BS EN 1388.
 - Sand bedding layer to pavers to be in accordance with the table in BS 7533-3 annex D. All pavers to be laid and compacted in accordance with all relevant parts of BS 7533.
 - Stone aggregate to permeable paving construction to be in accordance with BS EN13242: 2007.
 - All road marking to be in accordance with the local Highway Authority requirements.
 - Street name plates to be provided and placed in accordance with the local highway authority requirements.
 - Unless specified elsewhere all pavers will be laid in a 45° herringbone pattern.
 - Block paving immediately adjacent to features like drainage channels to be fixed in place using epoxy mortar minimum 14mm thick.
 - Contractor to allow for saw cutting all joints where new works extend into existing highway construction. Allow for painting of joints with bitumen emulsion reinstatement of chase all in accordance with highway authority requirements.
 - All new street lighting to be provided and fixed all in accordance with the Highway Authority requirements. Any variation in equipment proposed by the contractor to be approved prior to ordering and installation.
 - Soil stabilisation is a specialist works design element and therefore should be carried out by expert contractors in this field. the contractor should allow for appointing a suitable sub-contractor to undertake the works.
 - Preformed internal and external angle kerbs to be used where appropriate, mitring of kerbs is not acceptable.

Kerb Legend

- HB2 Kerb
255 x 125, P.C.C. Kerb - 125mm Up-stand
- Aco Kerbdrain HB225
255 x 125, P.C.C. Kerbdrain - 125mm Up-stand
- BN Drop Kerb
125 x 150, P.C.C. Kerb - 25 mm Up-stand
- 125 x 150 Bullnose Kerb (6mm upstand)
- EF Edging Kerb
50 x 150, P.C.C. Kerb - Flush
- Boarder Block, **Tobermore Tegula**, Charcoal
Used as Edge Restraint to Block Paved Footpath
- Relevant LH or RH transition kerb

For all Construction Details Refer to Calcinotto Drawings:
115190-CAL-XX-XX-DR-D-60 & 61

Surfacing Hatch Legend

- Asphalt Access Road
Construction Detail 01
- Asphalt Parking Bays
Construction Detail 02
- Asphalt Footpath
Construction Detail 03
- Block Paved Footpath
Construction Detail 04
- Paving Slabs (Footpaths / Patio)
Construction Detail 05
- Paving Slabs (Shared Terrace Areas)
Construction Detail 06
- Bin Store / Concrete Slab
Construction Detail 07

For all Construction Details Refer to Calcinotto Drawings:
115190-CAL-XX-XX-DR-D-60 & 61

Legend

- Site Boundary Line
- Root Protection Zones

P02 11.03.26 Plan updated as per comments
P01 20.02.26 Drawn - Tender Issue
Rev Date Description



Calcinotto
First Floor, South
Waterloo House
Fleets Corner
Poole BH17 0HL
01202 237237
info@calcinotto.co.uk
www.calcinotto.co.uk

Client
Highwood Group

Project Title
Chickenhall Lane

Drawing Title
**External Surfacing and Kerbing
Layout Surfacing**

Drawing Status
For Tender

Originator No.	Rev by	Chk by	Scale
115190	EC	GEB	1:200 @A1

PROJECT (ORIGINATOR ZONE LEVEL TYPE ROLE NO.)	Revision
115190-CAL-XX-XX-DR-D-105	P02

