




- Line of Office Compartment Wall below.
- Line of Fall Restraint safety line system set 2.0m back from all roof perimeters designed and installed to specialist sub-contractor details.

1. Rooflights. NOT TO BE WALKED ON under any circumstances. To be covered over with load bearing boarding as required by specialist subcontractor risk assessment to provide safe access to PV panels adjacent to rooflights. Final rooflight design by specialist sub-contractor to take into account end laps of roof cladding.

2. Photovoltaic Panels to specialist manufacturer detail. Positioned min 3.0m from roof edges and min 1.0m inside fall restraint system. Installation to take account of end laps of roof cladding.

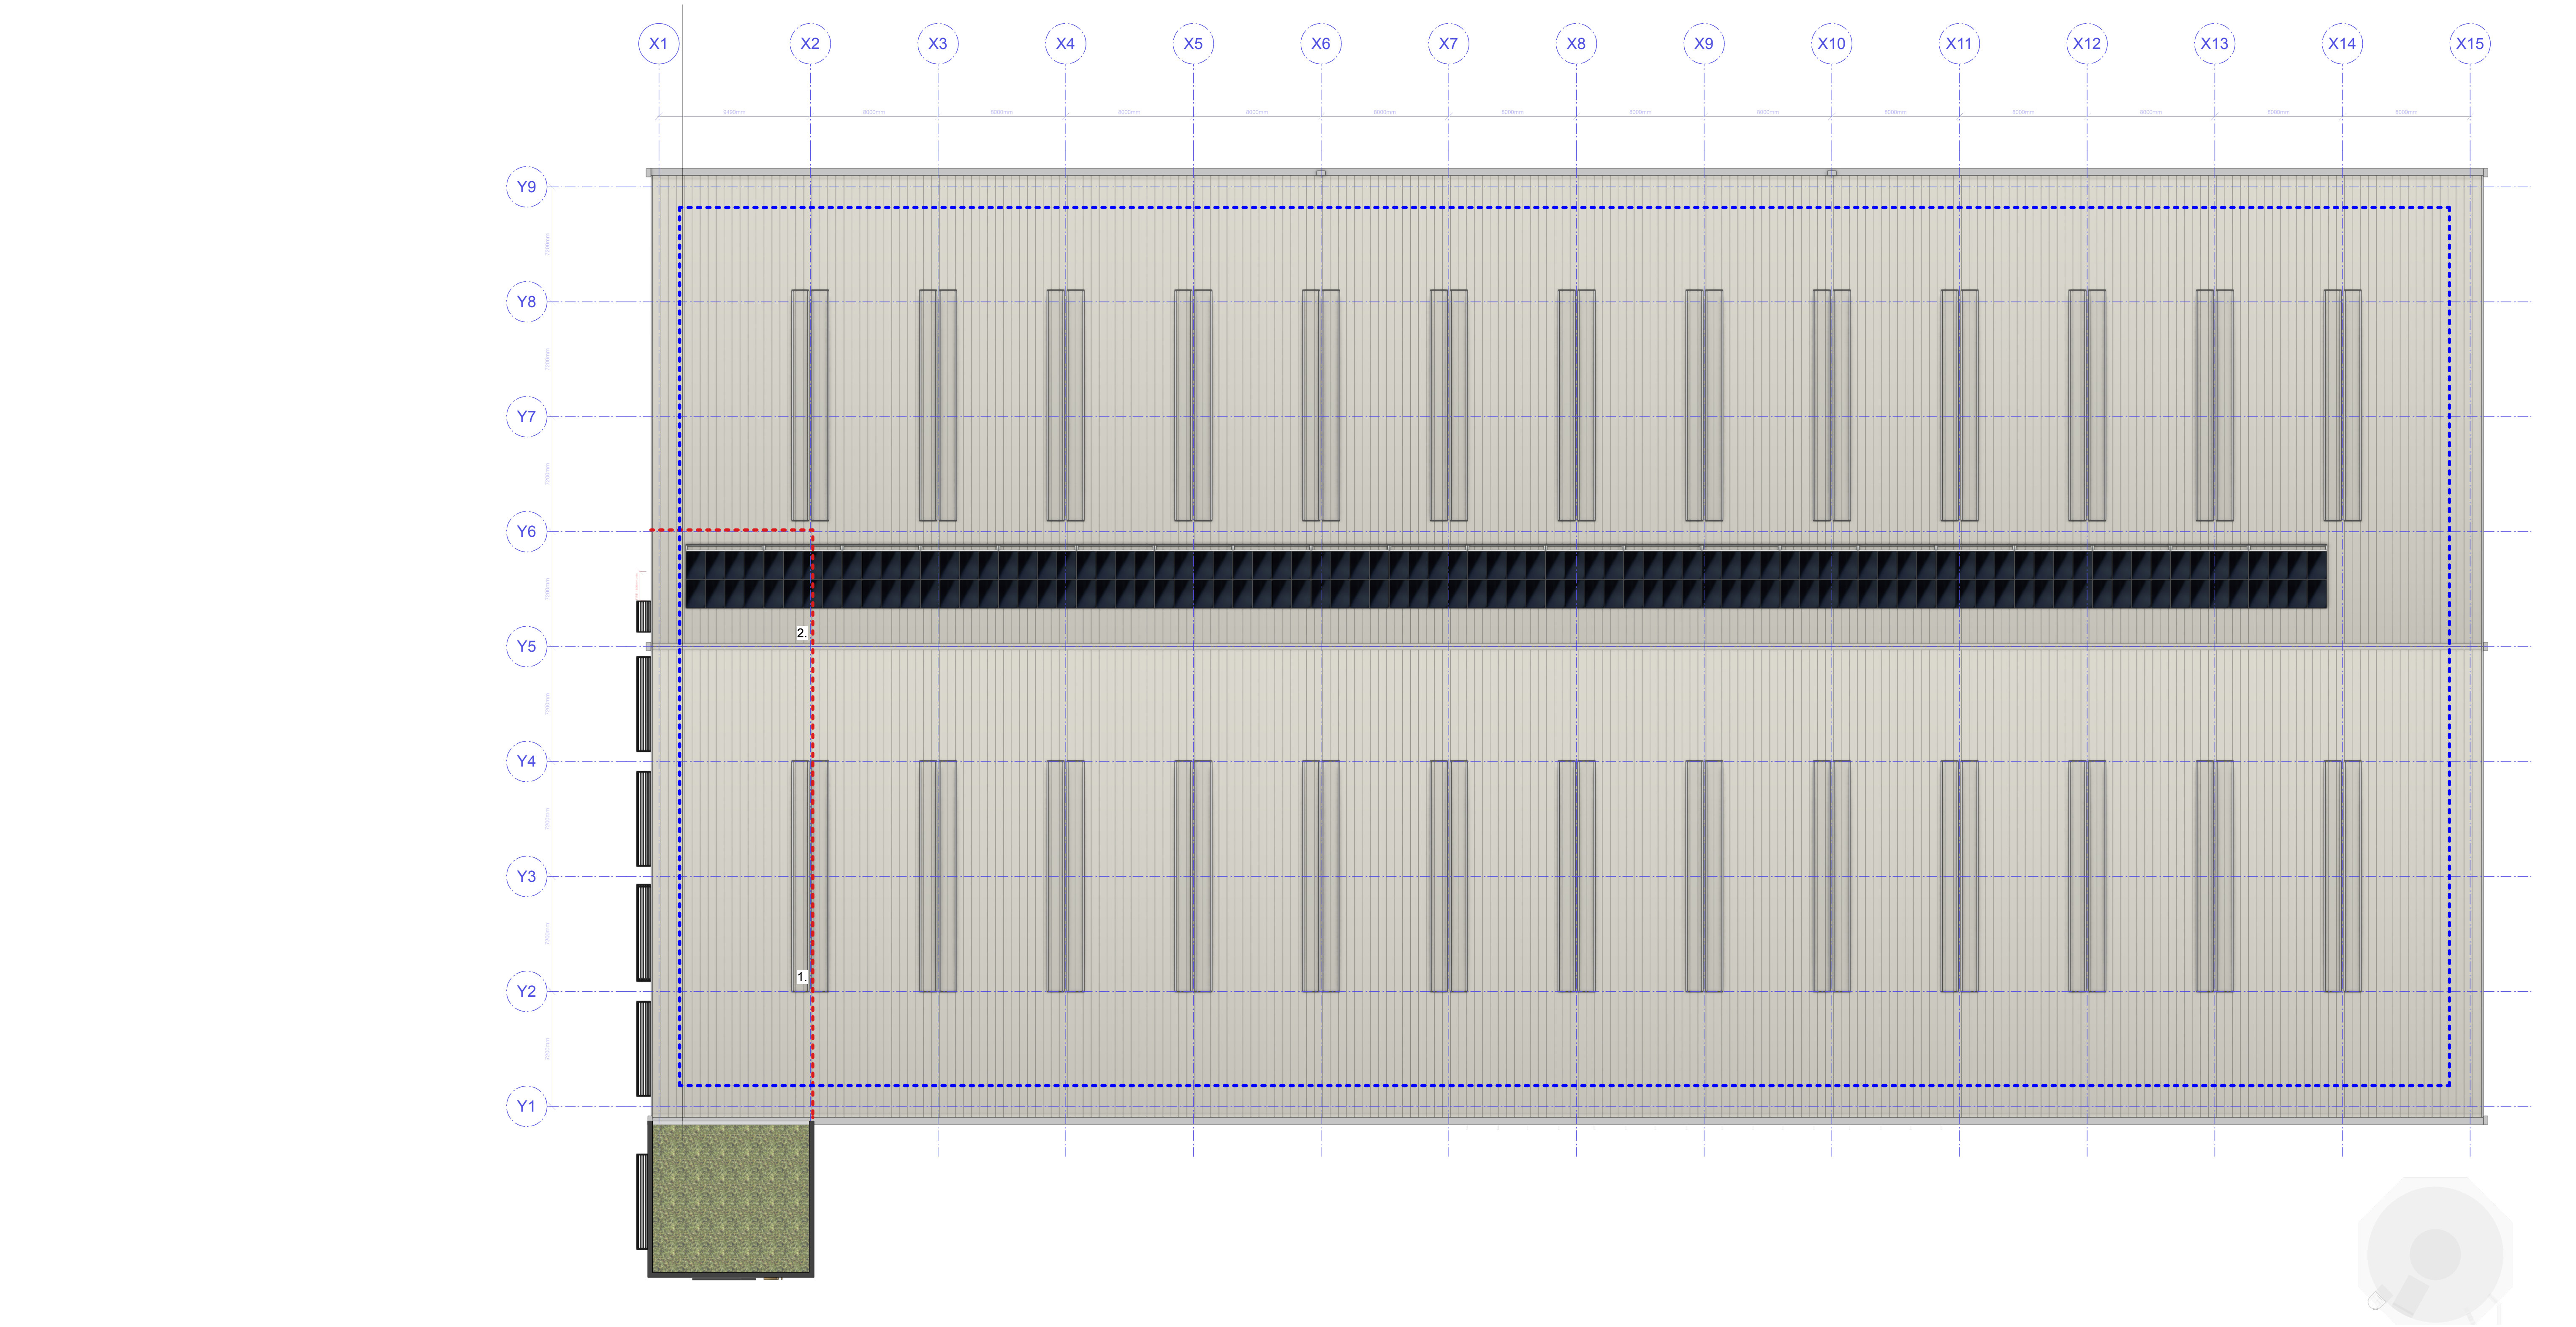