


Technical specification Trotter 2.0

Structure Geometry;

Type	A	A-hh	A-hh3	B	C
	Large	Large lowered	Large reinforced	Medium Horizontal	Medium vertical
Width (b)	3622 mm	3622 mm	3622 mm	2572 mm	1972 mm
Width (b1)	450 mm	450 mm	450 mm	450 mm	450 mm
Width (b2)	2205 mm	2205 mm	2205 mm	1800 mm	1800 mm
Height (h)	4884 mm	3700 mm	3700 mm	4280 mm	4884 mm
Height (h1)	2572 mm	2572 mm	2572 mm	1968 mm	2572 mm
Height (h2)	2312 mm	1412 mm	1828 mm	2312 mm	2312 mm
Weight frame	332 kg	332 kg	332 kg	286 kg	286 kg
Weight foot	1965 kg	1965 kg	5895 kg	1385 kg	1385 kg
Feed Pitch	1736 mm	1736 mm	1736 mm	1333 mm	1333 mm
Stroke Feed	150 mm	150 mm	150 mm	150 mm	150 mm
Max Wind load	28 m/s	28 m/s	28 m/s	28 m/s	28 m/s
Beaufort	10	10	10	10	10

Print area	8 m2	8 m2	8 m2	4m2	4m2
Length	3410 mm	3410 mm	3410 mm	2350 mm	1720 mm
Width	2350 mm	2350 mm	2350 mm	1720 mm	2350 mm

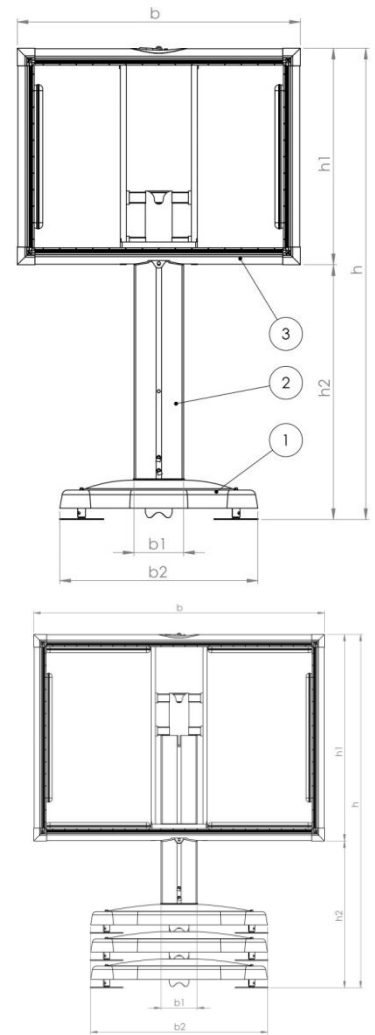

lighting specification;

Type	Large	Medium liggend	Medium stand
Armature	2x2 58Watt & 4x2 36Watt Totaal 505Watt	2x2 58Watt Totaal 232 Watt	2x2 58Watt Totaal 232 Watt
Power	230V ~ 50Hz	230V ~ 50Hz	230V ~ 50Hz
Ballast	VSA	VSA	VSA
Type TL	F58W/965-T-8 Philips & F36W/965-T-8 Philips	F58W/965-T-8 Philips	F58W/965-T-8 Philips
Joining	CEE plug (blue, 230V)	CEE plug (blue, 230V)	CEE plug (blue, 230V)
Power cord	5m, 3x1,5mm2	5m, 3x1,5mm2	5m, 3x1,5mm2
IP Rating	IP65	IP65	IP65
Colour Temperature	6500 °K	6500 °K	6500 °K
Lighting Efficiency	78LM/W	78LM/W	78LM/W

CASSETTE;

Dimensions;

Type	A	B	C
Height	2572 mm	1972 mm	2572 mm
Width	3622 mm	2572 mm	1972 mm
Diepte	450 mm	450 mm	450 mm
Weight	202 kg	156 kg	156 kg

Outside;

Material : Cold-rolled steel plate 0.70 mm

Corrosion Protection: Galvanized

Colour : RAL 7001 (Outerside)

Inside;

Material : STEEL TO BE S235J2 OR EQUIVALENT

Corrosion Protection: Galvanized

Colour : inapplicable



MAST;

Afmetingen;

Type	A	B	C
Height	2630 mm	2630 mm	2630 mm
Width	450 mm	450 mm	450 mm
Dikte	246 mm	246 mm	246 mm
Weight	130 kg	130 kg	130 kg

Outside;

Material : Cold-rolled steel plate 0,70mm

Corrosion Protection: Galvanized

Colour : RAL 7016 (Outerside)

Inside;

Material : STEEL TO BE S235J2 OR EQUIVALENT

Corrosion Protection: Galvanized

Colour : inapplicable



Foot;

Afmetingen;

Type	A	B	C	D
Total height	450 mm	450 mm	450 mm	473 mm
Lengte / Width	2205 mm	1800 mm	1800 mm	1214 mm
Dikte	246 mm	246 mm	246 mm	269 mm
Weight	1965 kg	1385 kg	1385 kg	820 kg

Outside;

Material : LLDPE

Colour : RAL 7021 (Outside)

Inside;

Material : STEEL TO BE S235J2 OR EQUIVALENT

Corrosion Protection: Galvanized

Colour : inapplicable

Mass weight; (Concrete)

Strength class: LOS

Environmental class : 00

Cons.klasse F4

Recipe Description:

Komo Attest: 1704-12-09113
CEM I 52,2R Lengerich
Cem III/B 42,5N LH/SR Dyckerhoff Neuss
Vliegas EFA Fuller MR ½ cat A
GRIND 4/16
VC 1550 con. 30%




Technical specification Trotter type D

Structure Geometry;

Type	D3	D4
Width (b)	1214 mm	1214 mm
Width (b1)	450 mm	450 mm
Width (b2)	1196 mm	1250 mm
Height (h)	2732 mm	2793 mm
Height (h1)	1814 mm	1814 mm
Height (h2)	917 mm	945 mm
Weight frame	160 kg	160 kg
Weight foot	500 kg	820 kg
Feed Pitch (b3)	919 mm	1000 mm
Stroke Feed	100 mm	150 mm
Max Wind load	28 m/s	28 m/s
Beaufort	10	10

Print area	1,5 m2	1,5 m2
Length	960 mm	960
Width	1560 mm	1560

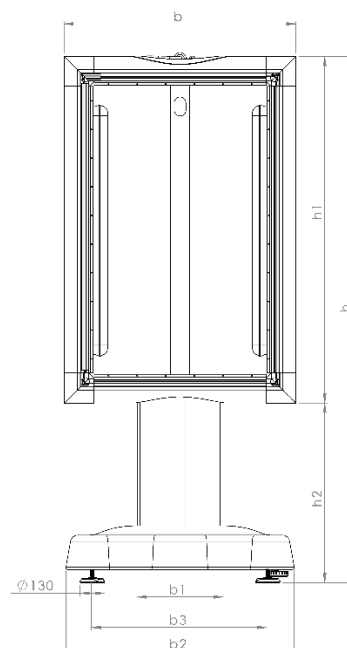

lighting specification;

Type	Large
Armature	2x2 36Watt Totaal 144Watt
Power	230V ~ 50Hz
Ballast	VSA
Type TL	F36W/965-T-8 Philips
Joining	CEE plug (blue, 230V)
Power cord	5m, 3x1,5mm2
IP Rating	IP65
Colour Temperature	6500 °K
Lighting Efficiency	78LM/W