




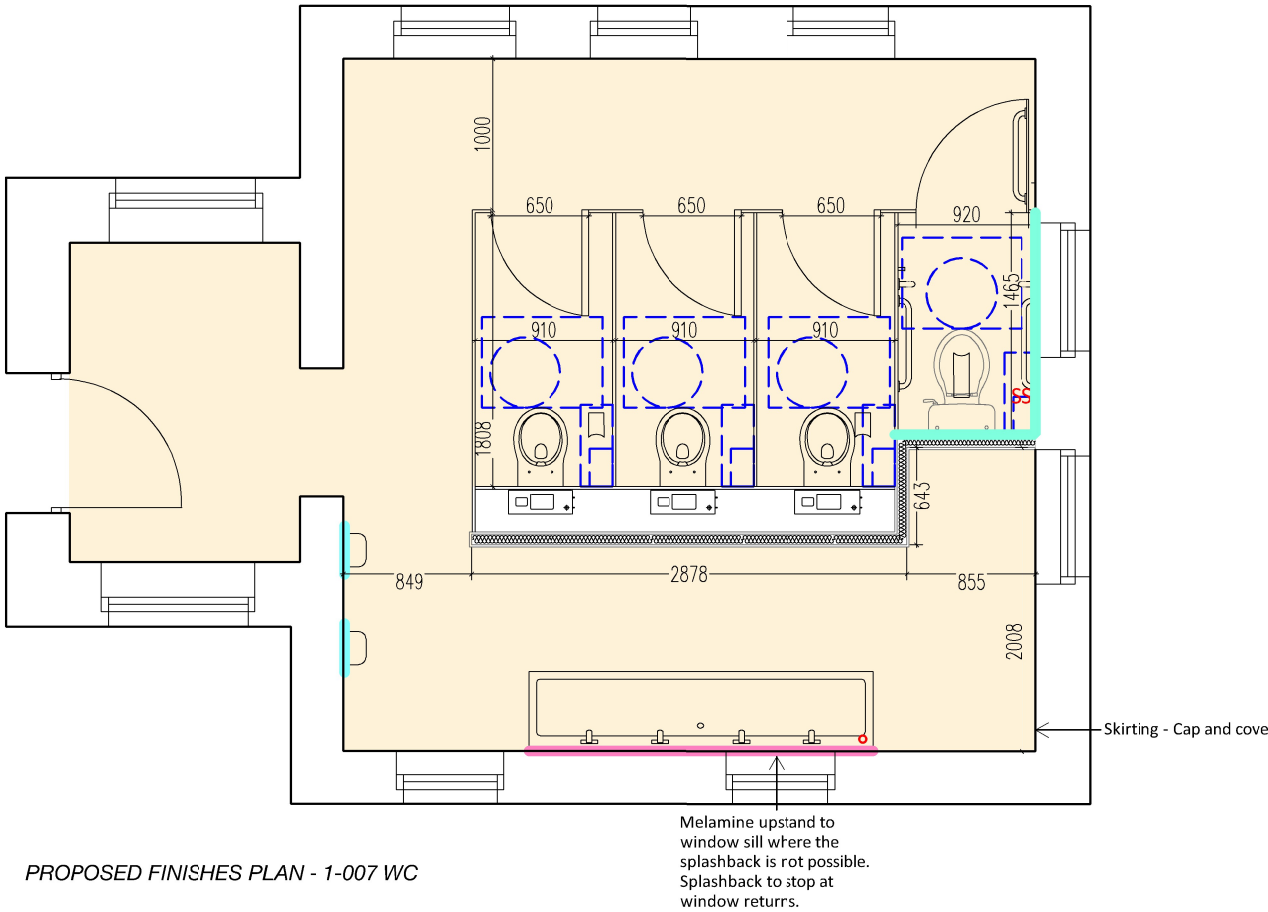


PROPOSED FINISHES PLAN - 1-007 WC

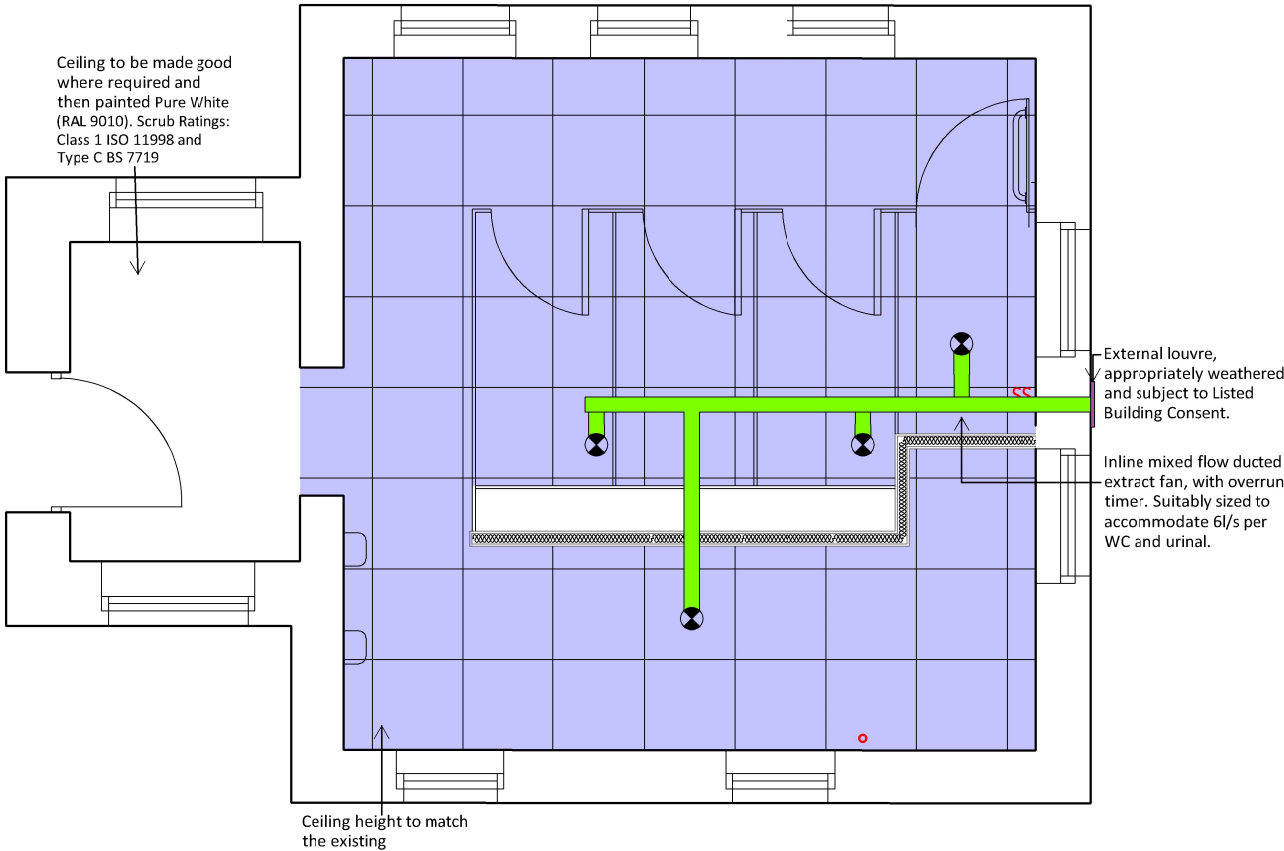

PROPOSED CEILING PLAN - 1-007 WC




Scope of Works Notes:



Outside of scope of works

NOTES:
Area not fully surveyed, layouts are based on existing information provided by others, observations from site and check dimensions. Any items/ elements requiring specific dimensions should be checked with on site measurements; post demolition/ opening up works as certain elements restrict access to allow for actual dimensions to be recorded prior to this stage.

LOCATION PLAN

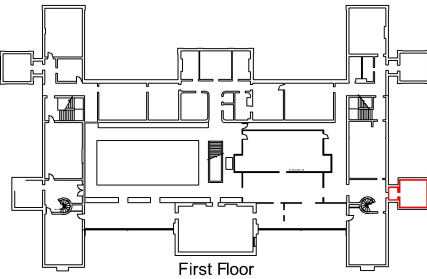

First Floor

Finishes Notes:

WALLS AND PAINTED CBLINGS:	
W1	Acrylic Durable Matt Emulsion paint. Colour: RAL 9010 (Pure White).*
W2	Solid grade laminate IPS panel system. Colour: TBC.*

*Or similar approved by the client

WALL PROTECTION:

- W1** Wall Protection (Splashback)
Extruded semi-rigid PVC-U sheet (Altro Whiterock or similar approved)
Colour: White
Surface Finish: Satin
Thickness: 2.5mm
Trims: High impact PVC-U 'H' joint trims
LRV: 89
- W2** Wall Protection (WC's)
Extruded semi-rigid PVC-U sheet (Altro Whiterock or similar approved)
Colour: Flint (Check LRV Difference)
Surface Finish: Satin
Thickness: 2.5mm
Trims: High impact PVC-U 'H' joint trims
LRV: 32
Wall protection half height (1220mm from FFL/ top of cap and coving) in WC, around the cubicle to protect the walls.
- W3** Corner Protection
Extruded semi-rigid PVC-U sheet (Altro Whiterock or similar approved)
Colour: White
Surface Finish: Textured
Thickness: 2.5mm
Size: 1220x75x75mm, corner radius 5mm
LRV: 89 (*If LRV difference required on a column for example, then colour to be agreed with client.)
- W4** Wall Protection (Splashback)
Extruded semi-rigid PVC-U sheet (Altro Whiterock or similar approved)
Colour: White
Surface Finish: Satin
Thickness: 2.5mm
Trims: High impact PVC-U 'H' joint trims
LRV: 89
Wall protection below hand dryers height (500mm wide to the floor).

FLOOR TYPE NOTES:

FLOORS:	
F1	Altro Aquarius™ Hippo AQI2013 or similar approved Colour: Hippo Grey Thickness: 2mm Slip performance in accordance with: EN 13845 PTV >50 R11 Resilience in accordance with: EN ISO 24346 Wear Resistance: EN 13845 Annex D ≤ 10% particles lost over 50000 cycles Light Reflectance Value: 11 Antistatic Properties: In accordance with EN 1815 (2kV Antistatic) Chemical Resistance in accordance with EN ISO 26987: Good Cap and cove (see skirting detail).

CEILING TYPE NOTES:

- PROPOSED CEILING TYPE 1:**
600x600 lay in grid suspended ceiling with water resistant tiles or similar approved.
Colour: Global White
Ceiling tiles to be suitable for humid areas.
Non-corrosive suspended ceiling grid system to be used.

All LRV's based on Y values.

SKIRTING:	
S1	Skirting - Cap and cove

See typical Cap and Cove skirting details

ELECTRICAL SYMBOLS:

- 600X600 LED Light panels
- 5-year warranty on the panel and driver
- White Aluminium Bezel
LED luminaires shall have a minimum of 5 years warranty and comply to L80 for 50,000 hours.
Or similar approved
- Inline mixed flow ducted extract fan, with overrun timer. Suitably sized to accommodate 6l/s per WC and urinal as per Approved Document F: Volume 2.
- External louvre, appropriately weathered and subject to Listed Building Consent

Rev.	Date	Details	Drawn	Checked
Issued for:				
TENDER				
Project/Client:			Project No:	
Victoria House			25021	
Police Station			Dwg No:	
			3002	
			Rev:	
			P1	
Drawing:			Scale:	
WC - 1-007			1:50 @A3	
Proposed Finishes &			Drawn By:	
Ceiling Plan			Date:	
			21/10/25	
			Checked By:	
			Date:	
			21/10/25	

MORESTED.