


10m @ 1:200



25m @ 1:500




20m @ 1:1250




SITE PLAN
BASED ON TOPO INFORMATION
SCALE 1:200
O.S LICENCE NUMBER 100007080




BLOCK PLAN
BASED ON O.S INFORMATION
SCALE 1:500
O.S LICENCE NUMBER 100007080



PROPOSED DEVELOPMENT

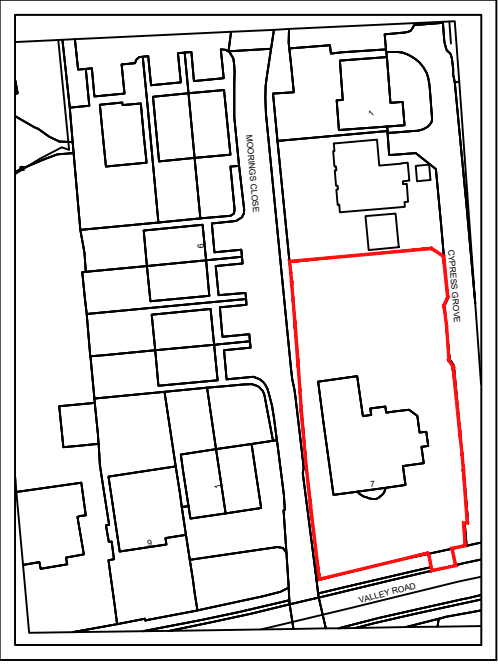

LOCATION PLAN
BASED ON O.S INFORMATION
SCALE 1:1250
O.S LICENCE NUMBER 100007080

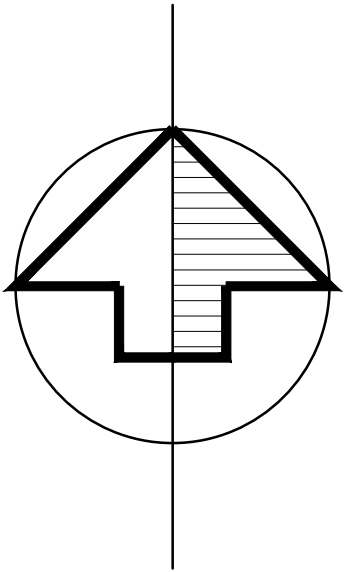


NOTES-PLANNING

rev-30-07-24


- The contents of this drawing are copyright.
- Planning drawings are only to be used for planning purposes & no reliance on compliance with Building regulations should be assumed.
- Drawings must be read as a complete pack and not individually.
- Do not scale. Figured dimensions only to be used.
- Contractor must verify all dimensions and report any discrepancies before putting work in hand or making any shop drawings.
- All flat roofs to be fitted with a man safe system to satisfy CDM 2015 regulations unless written confirmation from Principle Designer/ Principle Contractor is provided to show alternative compliance has been sought and approved.
- Start design to be independently checked by stair fabricator for reg. compliance and rising, prior to construction/ ordering. Dimensions to be checked before fabrication.
- Mechantron waterproofing specialists (or similar company with relevant PI insurance) to be instructed and detail of basement waterproofing designs. - AEC carry no responsibility or PI cover for basement design in terms of waterproofing or structure in any way.
- A design and risk assessment should form part of our drawing package. If you have not received this from us by post, email or collection please contact us for a copy before moving forward with the project.
- We take no responsibility for the depicted site ownership boundary. Clients must notify us if they feel the our plans do not accurately depict their ownership or areas of control for planning purposes.
- We do not take responsibility for meeting minimum space as setout in Government Technical housing standards - nationally described space standards document.
- All Cladding & building attachments externally to be all A1 fire rated.
- 1985: We do NOT take any responsibility and do not carry any PI cover in relation to any matters relating to fire safety. Part 8 fire safety regulations, BS 5957 for fire or EW51 and drawings in no way form a fire strategy report. All design/ details relating to Fire Safety are shown for indicative purposes only and should be read in conjunction with the latest version of the Appointed Fire Consultant Fire Strategy Document/ Report - all information contained in such a report supersedes AEC drawings in all aspects. No assumption of any responsibility is accepted. If you are unaware who the appointed fire consultant is or don't have a copy of the latest version of the report please contact us in writing immediately.
- EW51: an independent and an appropriately qualified and insured fire consultant/engineer should be appointed by the client/contractor to ensure the finished project is compliant. Some mortgage companies require EW51 on buildings outside of the EW51 standard criteria.
- Part 8 & fire safety: An independent and appropriately qualified fire consultant should be instructed by the client/contractor at the earliest possible point in the design process to ensure compliance with Part 8 & fire safety. Please note that subject to a fire consultants confirmation/input the following points may be required in some or all areas of the building: 1) Sprinkler systems (Domestic or commercial) 2) Mechanical smoke extraction 3) Fixed shut fire safety glass 4) some sprinkler systems require large holding tanks 5) plan changes in relation to fire safety could result in loss of saleable floor area and potential requirement for additional planning applications. (This list is not exhaustive)

Windows forming the overheating strategy with a change in floor level exceeding 600mm between inside and outside require 1.1m guarding (APD O diagram 3.1).


LEGEND




SITE BOUNDARY




EXISTING TREES TO BE RETAINED




EXISTING TREE TO BE REMOVED



INDICATIVE PLANTING



PART OF EXISTING BUILDING TO BE DEMOLISHED



2 X 2M VISIBILITY SPY

SITE AREA: 0.13 HECTARES / 0.32 ACRES

1 X DOUBLE GARAGE @ 80.4 SQM / 865.4 SQFT

C	Garage size reduced	27.01.26	AS
B	Removed building on site plan amended Block plan proposed development added	17.11.25	AS
A	Block and location plan colour corrected	13.11.25	AS
No.	Revision.	date	by

PROPOSED DEVELOPMENT

7 VALLEY ROAD
CHANDLERS FORD
EASTLEIGH
SO53 1GQ

SITE, BLOCK AND LOCATION PLAN

scale	AS SHOWN @ A1	checked	JTR
date	SEPTEMBER 2025	drawn	AS
9716 / 300			
A B C			

ARC Architecture Ltd.

Chapel Studios, 14 Purewell,
Christchurch, Dorset, BH23 1EP

Tel: +44 (0) 1202 479919
E-mail: enquiries@arcarchitecture.uk
Web: www.arcarchitecture.uk



DESIGNERS RISK ASSESSMENT

Building Products and Construction Execution Hazards

The design team have highlighted unusual and significant risks only that may not be obvious to a competent contractor. They are to assist with risk reduction only and are not necessarily comprehensive. It is assumed that all works will be carried out by a competent contractor following good site management, site practice procedures, to an approved method statement (where appropriate) and in accordance with HSE guidance.

The proposed works are designed on a well established method of construction which can be carried out by a competent contractor. However, should the contractor find any area of concern he must inform the designer in order that appropriate action can be taken.

For significant hazards specific to this project see the following:

GENERAL NOTES:

- Principal Contractor to provide method statements for the safe working practice for: demolition, excavations, cutting of materials, support of adjacent structures, protecting personnel, neighbours & the public, working at height including crash bags & fall restraint systems.
- Principal Contractor to ensure Temporary Works Designer and Coordinator appointed for all propping works for structural alterations of existing building, including temporary guardrail and edge protection around voids and stairwells.
- This Designers Risk Assessment should be passed on to the Appointed Principal Designers and or Principal Contractor carrying out the next phase of works on this site.

INFORMATION	CONSTRUCTION RISKS	MAINTENANCE RISKS	CLEANING WINDOWS	CLEANING GUTTERS	IN - USE RISKS	DEMOLITION RISKS
CDM - PRE-CONSTRUCTION INFO FROM CLIENT CDM Information requested from client: 1) Topographical Survey Outstanding CDM information remains as residual risk, please request AEC appendix C for full list requested.	PROPOSED BUILDING IN CLOSE PROXIMITY TO BOUNDARY WORKING AT HEIGHT CONSTRUCTION ACCESS PROXIMITY TO HIGHWAYS / FOOTPATHS LARGE / HEAVY GLAZING UNITS MAINTAINING STRUCTURAL SUPPORT FOR ADJACENT STRUCTURES MANUAL HANDLING USE OF MACHINERY DUST POLLUTION	CHANGING LIGHT BULBS No lighting or electrical fixtures or fittings to be positioned above or close to double height space. or lighting or electrical fixture above double height space to be maintained by specialist equipment. e.g. long reach and clean systems. Sliding glazing to balcony's can be cleaned from balcony Interior of window above front porch and ledge should be cleaned using a long reach and clean system, and the ledge is not under any circumstances to be used to gain access to the window.	GLAZING IN CLOSE PROXIMITY TO BOUNDARY Self cleaning glass to be specified where possible TEMPORARY GUARDING To be installed during construction to prevent falling on existing uneven and stepped terrain ARBORICULTURAL METHOD STATEMENT There is an approved arboricultural method statement for this project that must be followed	INTERNAL GUARDING To be provided where operable window cills are set below 1100mm END USER GUIDANCE FOR FUTURE WORKS End user manual to ensure an awareness of any construction that must not be breached i.e. fire line to metal or timber frame buildings, in the event of future building works. GAS PRESENCE Potential for presence of Gas (various types) to be investigated. If present, specialist to provide design to negate.	DEMOLITION RISKS REFURBISHMENT AND DEMOLITION SURVEY Hazardous material survey to be undertaken prior to any on site works commencing - including stripping out. EXISTING WALLS OR PARTS OF BUILDINGS TO BE DEMOLISHED OR CONVERTED Structural engineer to produce calculations and final design solution and consider with Principal contractor methods of temporary support / shoring up during construction - prior to any on site works commencing - including stripping out.	- UNKNOWN OR UNIDENTIFIED SERVICES - MANUAL HANDLING - USE OF MACHINERY - DUST POLLUTION - LOUD OR EXTENDED PERIODS OF HIGH NOISE LEVELS