
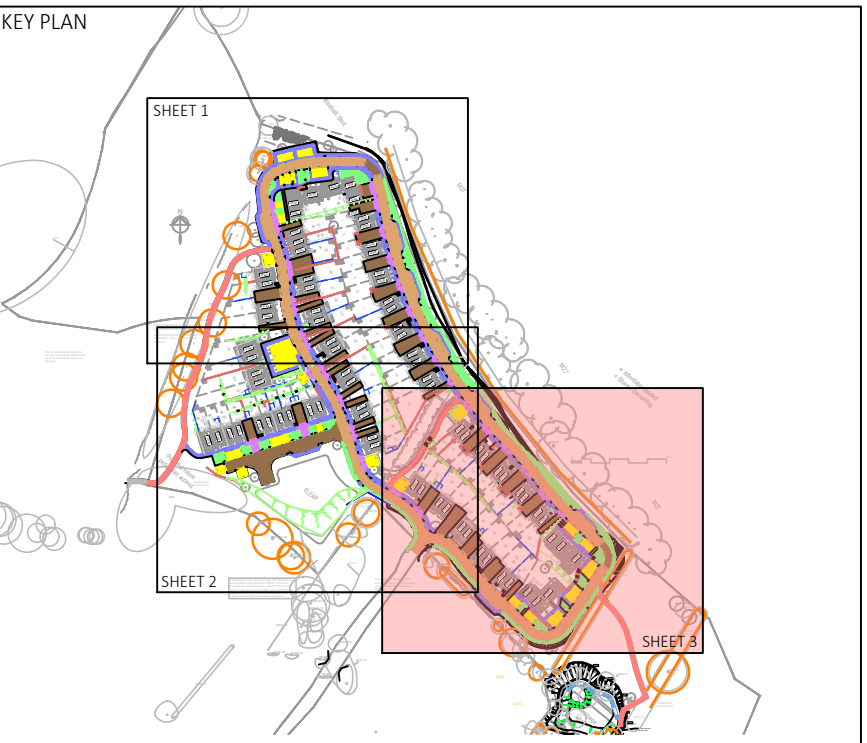


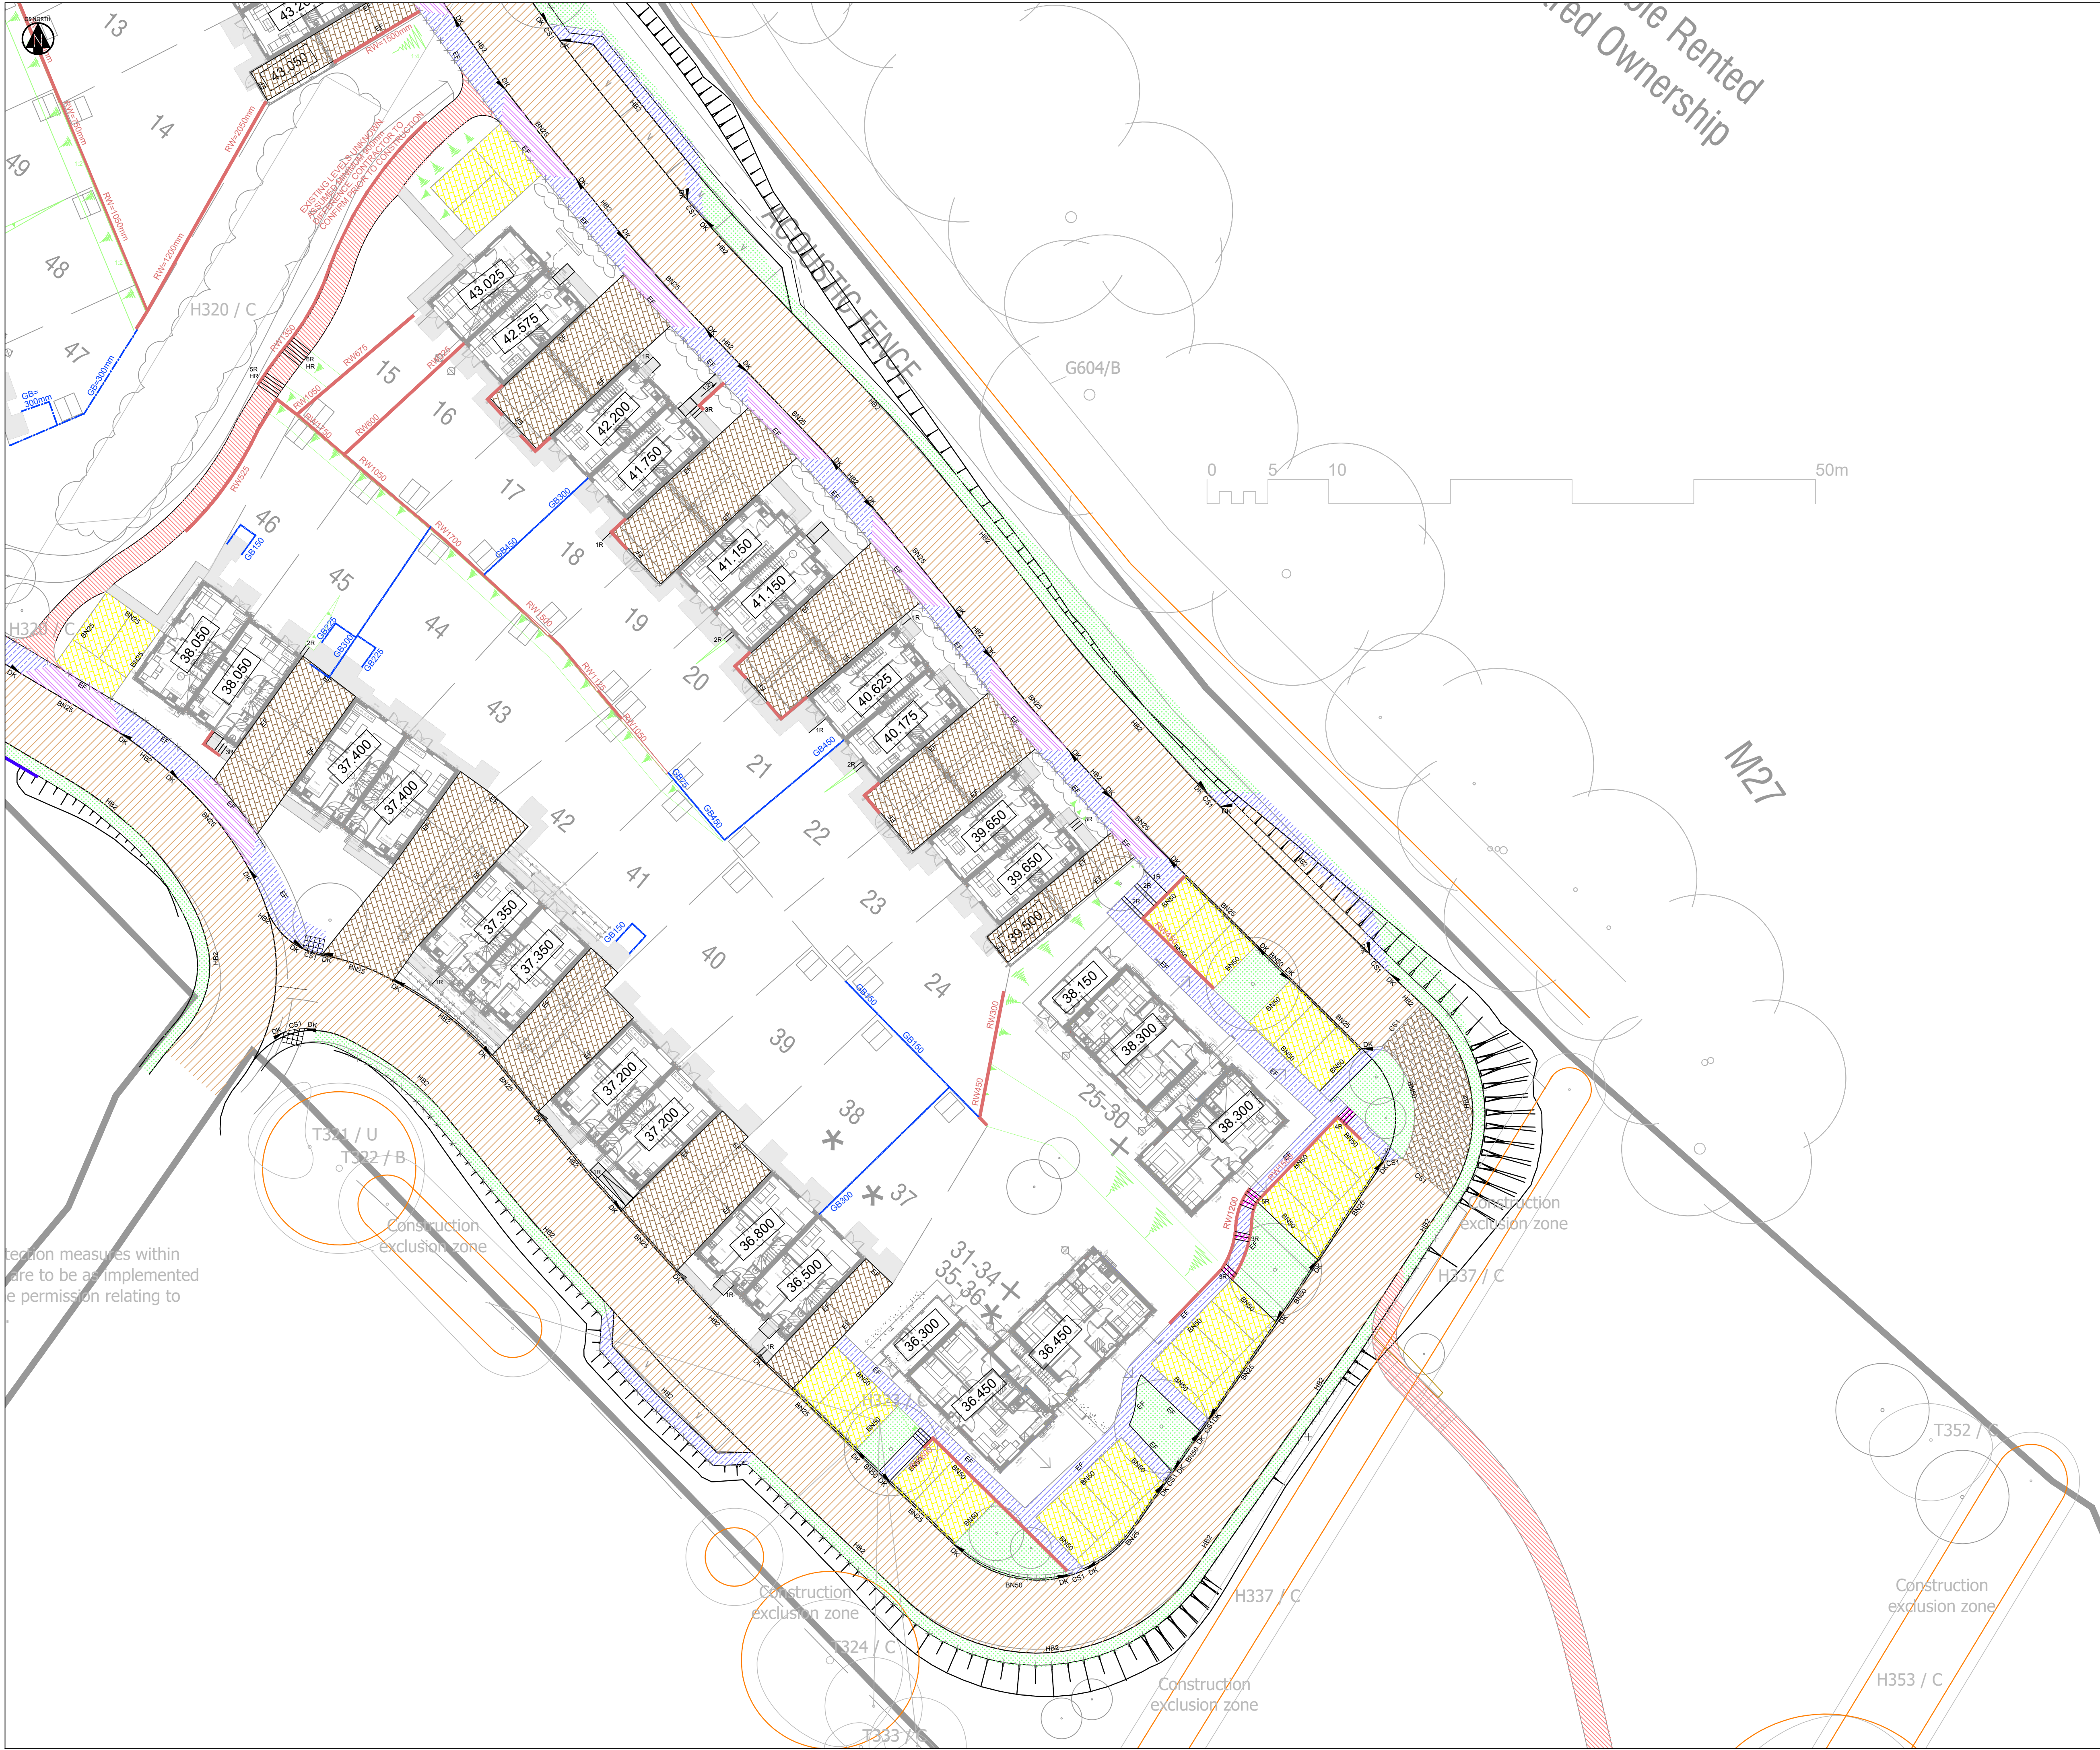

- NOTES:**
1. All levels relate to the survey which is to Ordnance datum. Dimensions not to be scaled.
 2. Topographical survey provided by Encompass Surveys (Drawing No ENC/010915/5T7).
 3. Use of this drawing does not absolve the client from his responsibilities under the Health and Safety: The Construction Design and Management Regulations 2015. The Principal Designer is required to contact Hydrock Consultants prior to permitting this drawing to be used in connection with any construction works.
 4. All works shown have been designed in accordance with Building Regs Part M.
 5. All works shown are designed to minimize works required adjacent to existing Trees.
 6. Where external ground levels are higher than the DPC tanking will be required.

Key	
Highways surfacing legend	
	Bituminous Carriageway (Refer to Hydrock drawing 21627-HYD-S1-X00-DR-C-0400 for specification)
	Vehicular Crossover (Refer to Hydrock drawing 21627-HYD-S1-X00-DR-C-0400 for specification)
	Bituminous Footway (Refer to Hydrock drawing 21627-HYD-S1-X00-DR-C-0400 for specification)
	Verge (Refer to Hydrock drawing 21627-HYD-S1-X00-DR-C-0400 for specification)
	Paving Slabs 450x450
	Blocked Paved Private Driveway Construction (Impermeable)
	Blocked Paved Private Driveway Construction (Permeable)
	Hogging path
	Blocked Paved Carriageway
	Step Construction
	HB2 125 x 255 Precast concrete kerb. Type HB2 with 125mm upstand.
	BN25 Precast concrete bull nosed kerb. Type BN2, with 25mm upstand.
	BN50 Precast concrete bull nosed kerb. Type BN2, with 50mm upstand.
	CS1 Precast concrete channel. Concrete CS1 channel with 0mm upstand.
	DK Precast concrete transition kerb. Type DL1 or DL2 Type HB2 to BN.
	EF 150x 50 Precast concrete Edging kerb Type EF.
	400 x 400 x 50mm thick Tactile Paving Flags (Blister) to be colour buff.

REVISIONS					
C06	01/10/24	Issued for construction approval.	MT	JAC	JAC
C05	28/06/24	Step hatch updated as per Client comments	HR		
C04	26/04/24	Drawing information made clearer through removal of unnecessary information.	HR	JAC	JAC
C03	12/12/23	Paths outside plots 25-30 changed to grassed. Kerbing updated.	HR	GH	GH
C02	27/11/23	Updated to suit Client comments.	HR	GH	GH
C01	29/09/23	Updated to construction issue and latest layout.	EB	GH	GH
P04	27/03/23	Updated site layout and note removed.	JL	GH	JC
P03	09/12/22	Updated drawing.	JL	GH	JC
P02	18/10/22	Updated plot numbers.	JL	NJ	JC
P01	07/10/22	First Issue.	JL	JT	JC

Rev	Date	Description	By	Ckd	App
-----	------	-------------	----	-----	-----

OVER COURT BARN
OVER LANE
ALMONDSBURY
BRISTOL
BS32 4DF
T: +44 (0) 1454 619533
e: bristol@hydrock.com

CLIENT
FOREMAN HOMES

PROJECT
LAND OFF MISERY LANE
PROVIDENCE HILL, BURSLEDON
SOUTHAMPTON

TITLE
EXTERNAL FINISHES PLAN
3 OF 3

HYDROCK PROJECT NO. C-21627-C		SCALE @ A1 1 : 250	
STATUS DESCRIPTION FOR APPROVAL		STATUS S4	
DRAWING NO. (PROJECT CODE-ORIGINATOR-ZONE-LEVEL-TYPE-ROLE-NUMBER) 21627-HYD-XX-XX-DR-C-0702		REVISION C06	