


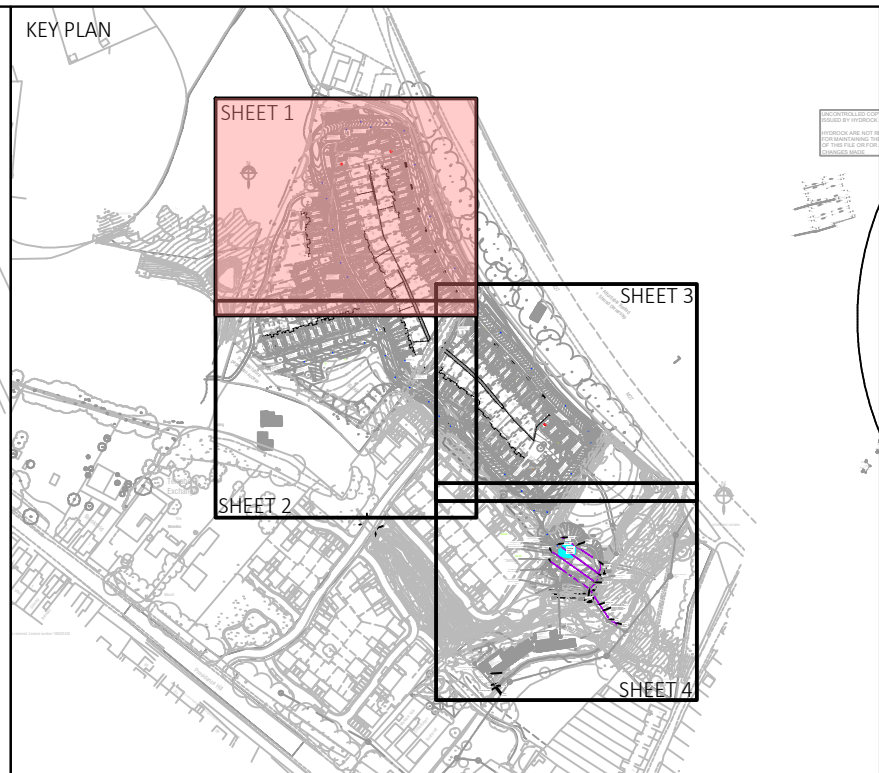

General Drawing Notes:

1. The planning, design and construction of sewers shall be in accordance with Sewers Sector Guidance Appendix C, Design and Construction Guidance, The Civil Engineering Specification for the Water Industry 7th Edition and Independent Water Networks Limited amendments to CESWI.
2. All Adoptable sewers within adoptable highway with less than 1.2m cover to have reinforced concrete slab protection. All Adoptable sewers within grassed areas with cover less than 0.9m to have reinforced concrete slab protection. All areas with greater cover than the minimum required to have type S bed and surround.
3. Use of this drawing does not absolve the client from his responsibilities under the Health and Safety, The Construction Design and Management Regulations 2015. The Principal Engineer is required to contact Hydropact Consultants prior to permitting this drawing to be used in connection with any construction works.
4. All sewers to be laid soft to soft unless otherwise shown.
5. All levels are to OS unless otherwise stated.
6. Where sewers are to be constructed inside the restricted tree zone a suitable tree root protection barrier is to be installed to Independent Water Networks Limited's specification.
7. Designs are subject to change through detailed design.
8. Refer to Hydropact Technical Note 21627-HYD-PO-XX-TN-C-0001 for details of the drainage strategy.

REVISIONS						
C11	18/12/24	Drawing legend updated to show stages of filtration and include additional forms for water quality.	JAC	JAC	JAC	
C10	17/10/24	Slab underdrain's added to Plots 82-92.	JRC	JAC	JAC	
		Underdrain's to ponds added. Drawing key updated.				
C09	30/09/24	Updated to suit revised basin details. Issued for construction approval.	JAC	JAC	JAC	
C08	27/09/24	ACO's added to driveways on Plots 48, 50, 52, 56, 61. Yard gullies omitted all to client request.	JRC	JAC	JRC	
C07	28/06/24	Land drainage updated to suit Client comments.	HR			
C06	29/04/24	Drawing information made clearer through removal of unnecessary information.	HR	JAC	JAC	
C05	05/04/24	Slot drains updated to land drains. Northern parking bays adjusted	HR	-	-	
C04	20/02/24	Plots 2-5 garden land drainage added to suit revised engineering design.	HR	JAC	JAC	
C03	05/02/24	Plots 62-73 foul connections updated to suit Client comments.	HR	JAC	JAC	
C02	05/12/23	Updated to suit Client comments.	HR	GH	GH	
C01	29/09/23	Updated to construction issue.	JL	GH	-	
P09	29/08/23	Drainage strategy updated based on client comments	GH	GH	-	
P08	18/07/23	Drainage strategy updated to reflect one outfall point located at the south west of the site.	JL	GH	GH	
P07	27/03/23	Updated Foul drainage and site layout.	JL	GH	GH	
P06	04/01/23	Updated based on comments	JL	GH	GH	
P05	18/10/22	Updated plot numbers.	JL	NI	JC	
P04	17/10/22	Added tree protection barriers.	JL	NI	JC	
P03	07/10/22	Updated drainage strategy.	JL	NI	RA	
P02	08/08/22	Updated drainage strategy.	JL	NI	RA	
P01	14/07/22	First Issue.	NI	RA	RA	

Rev	Date	Description	By	Ckd	App
-----	------	-------------	----	-----	-----

Hydrock

OVER COURT BARN
OVER LANE
ALMONDSBURY
BRISTOL
BS32 4DF
t: +44 (0) 1454 619533
e: bristol@hydrock.com

CLIENT
FOREMAN HOMES

PROJECT
LAND OFF MISERY LANE
PROVIDENCE HILL, BURSLEDON
SOUTHAMPTON

TITLE
DRAINAGE LAYOUT
SHEET 1 OF 4

HYDROCK PROJECT NO. C-21627-C		SCALE @ A1 1 : 250
STATUS DESCRIPTION FOR APPROVAL		STATUS S4
DRAWING NO. (PROJECT CODE-ORIGINATOR-ZONE-LEVEL-TYPE-ROLE-NUMBER) 21627-HYD-XX-XX-DR-C-0600		REVISION C11