

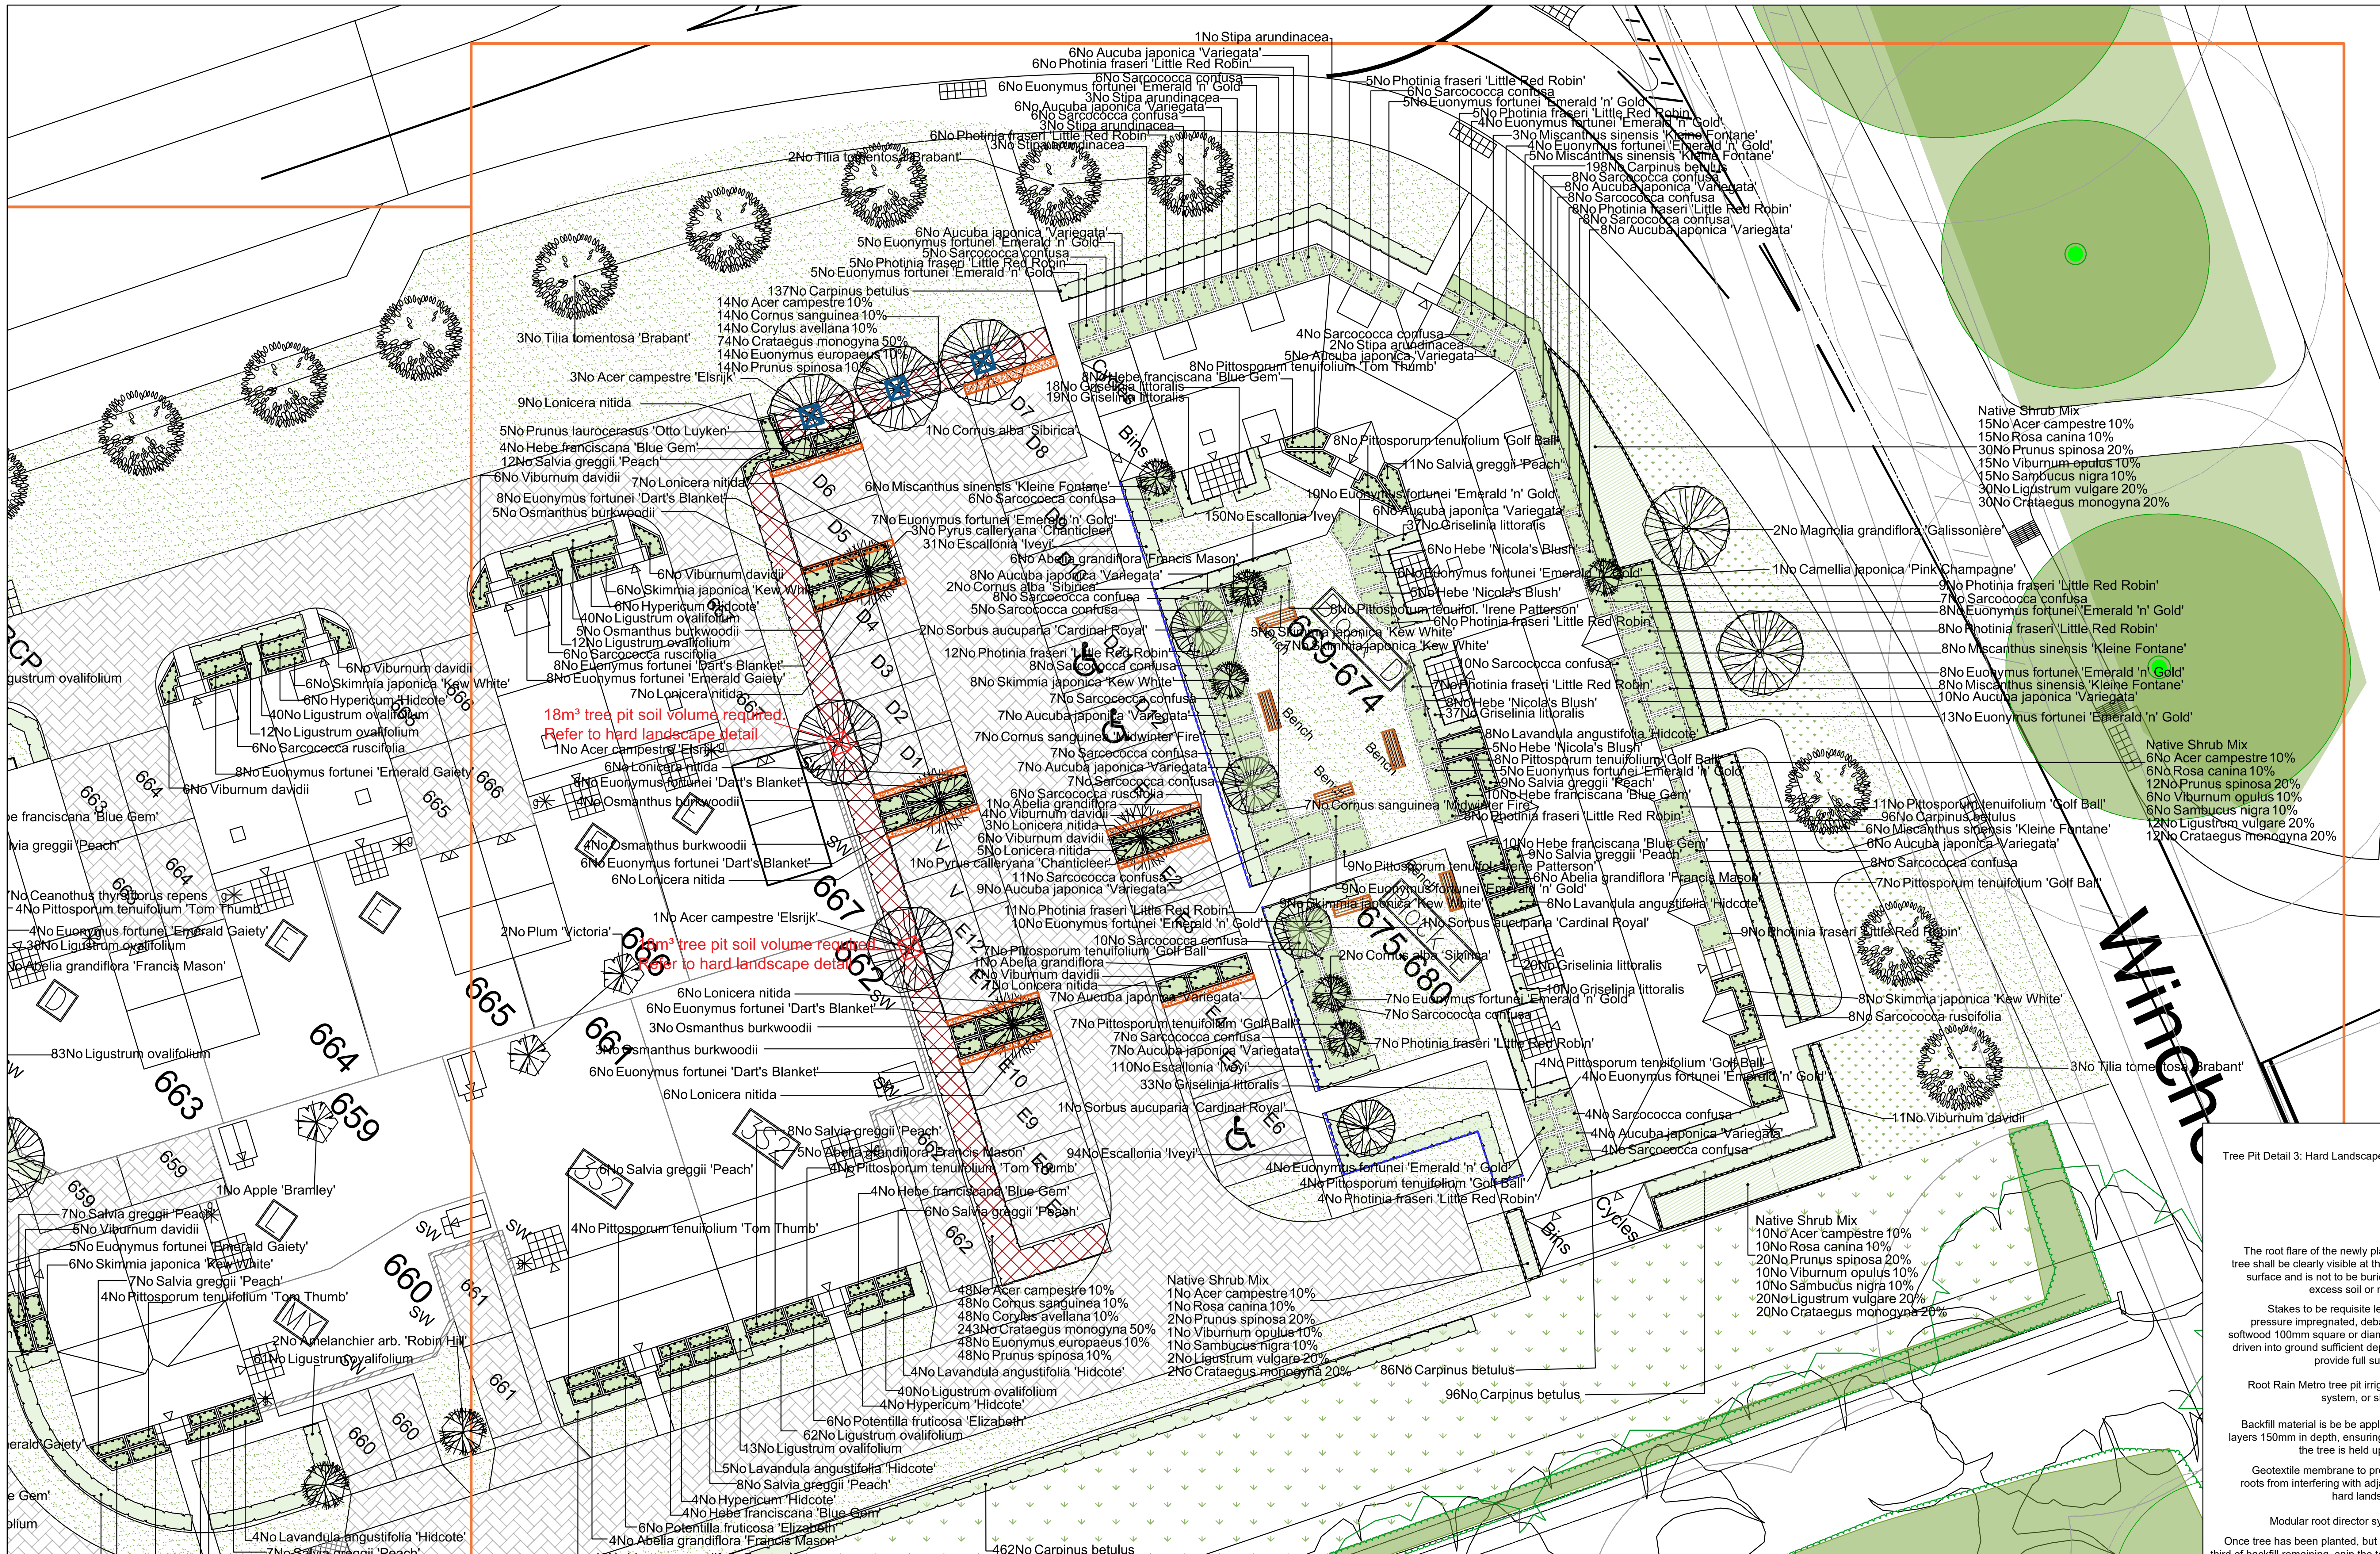


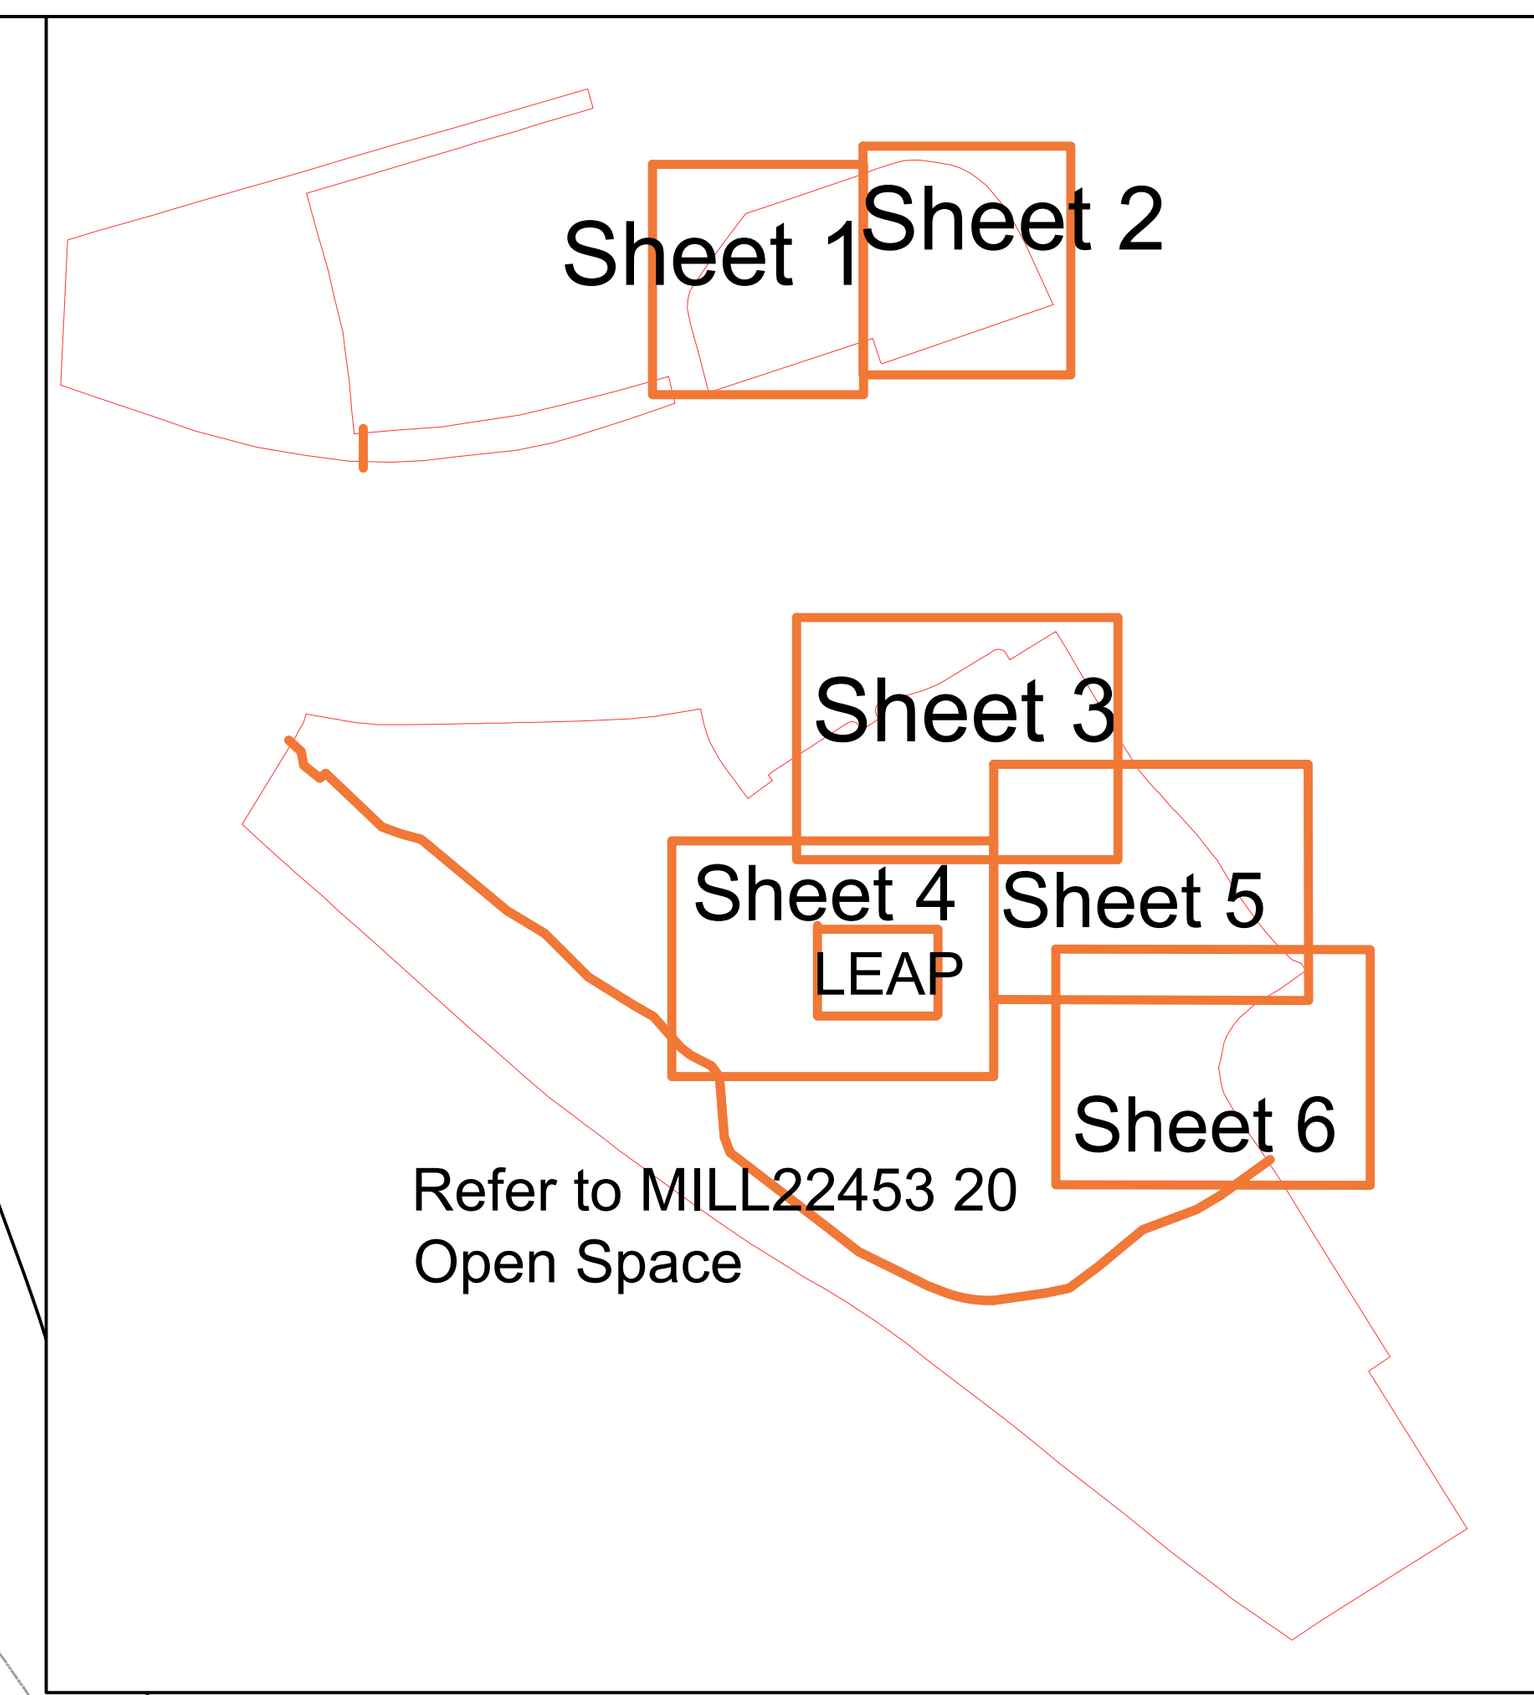

SPECIFICATION
All works generally, to comply with the written Soft Landscape Specification.


NOTES:
DO NOT SCALE FROM DRAWING
NOT FOR CONSTRUCTION, FOR PLANNING PURPOSES ONLY

Tree Pit Detail 3: Hard Landscape

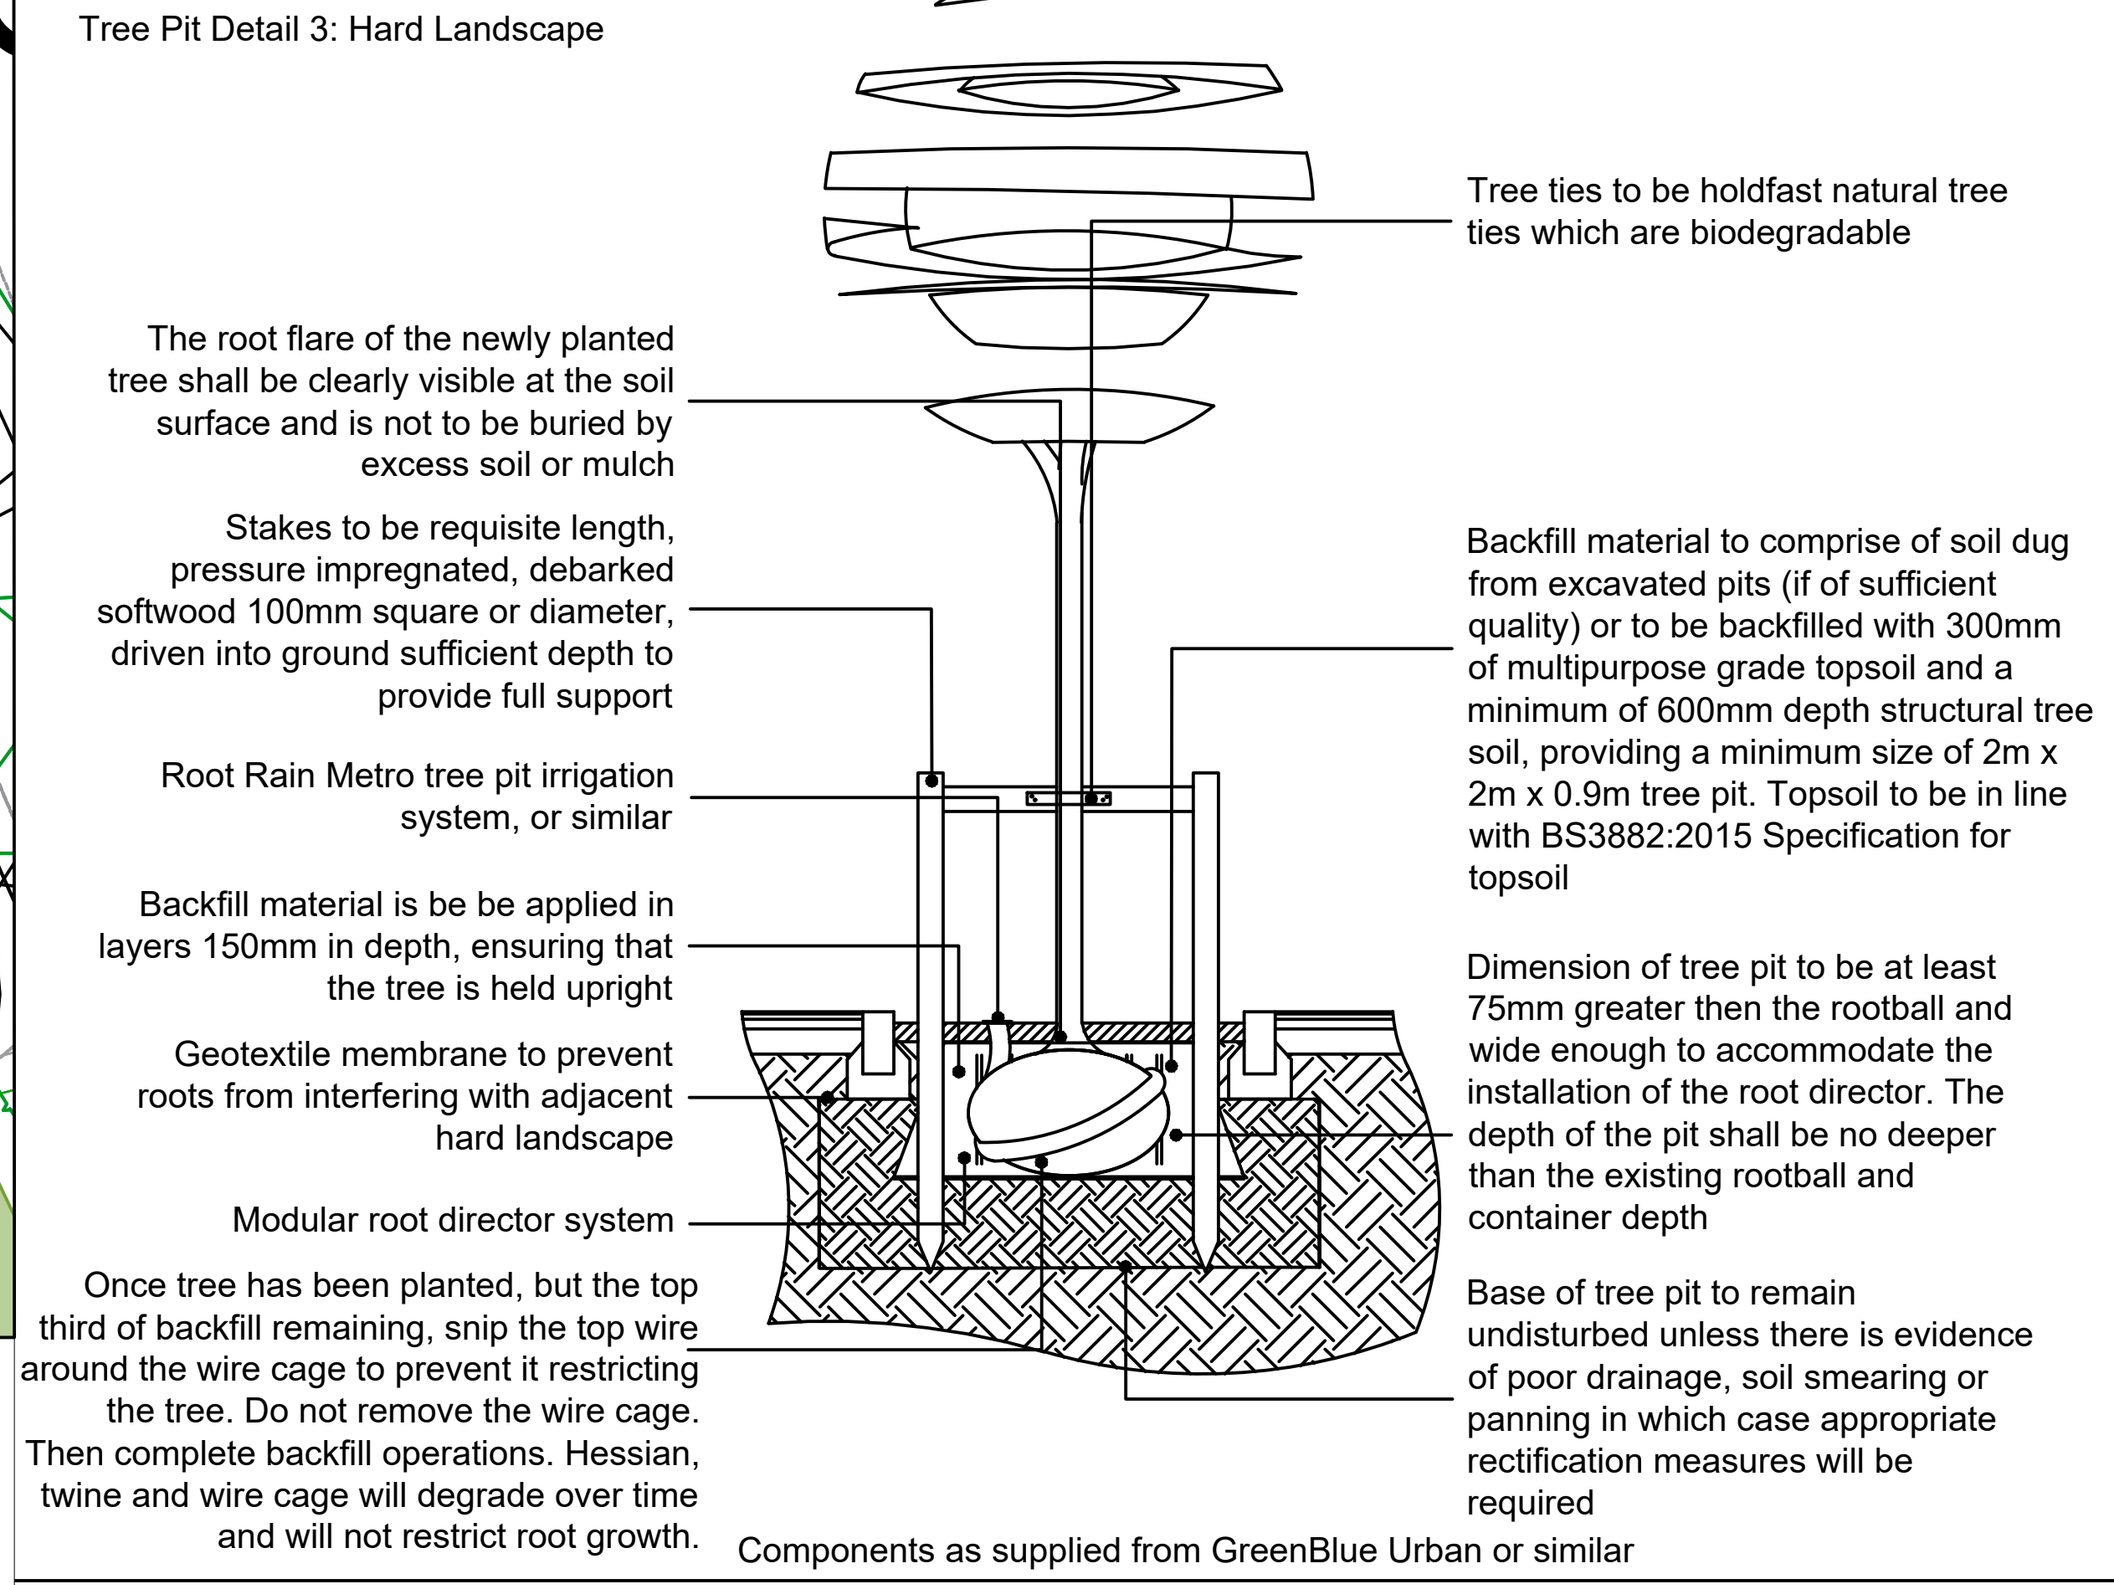

Components as supplied from GreenBlue Urban or similar

Tree Pit Detail 2: Hard Landscape

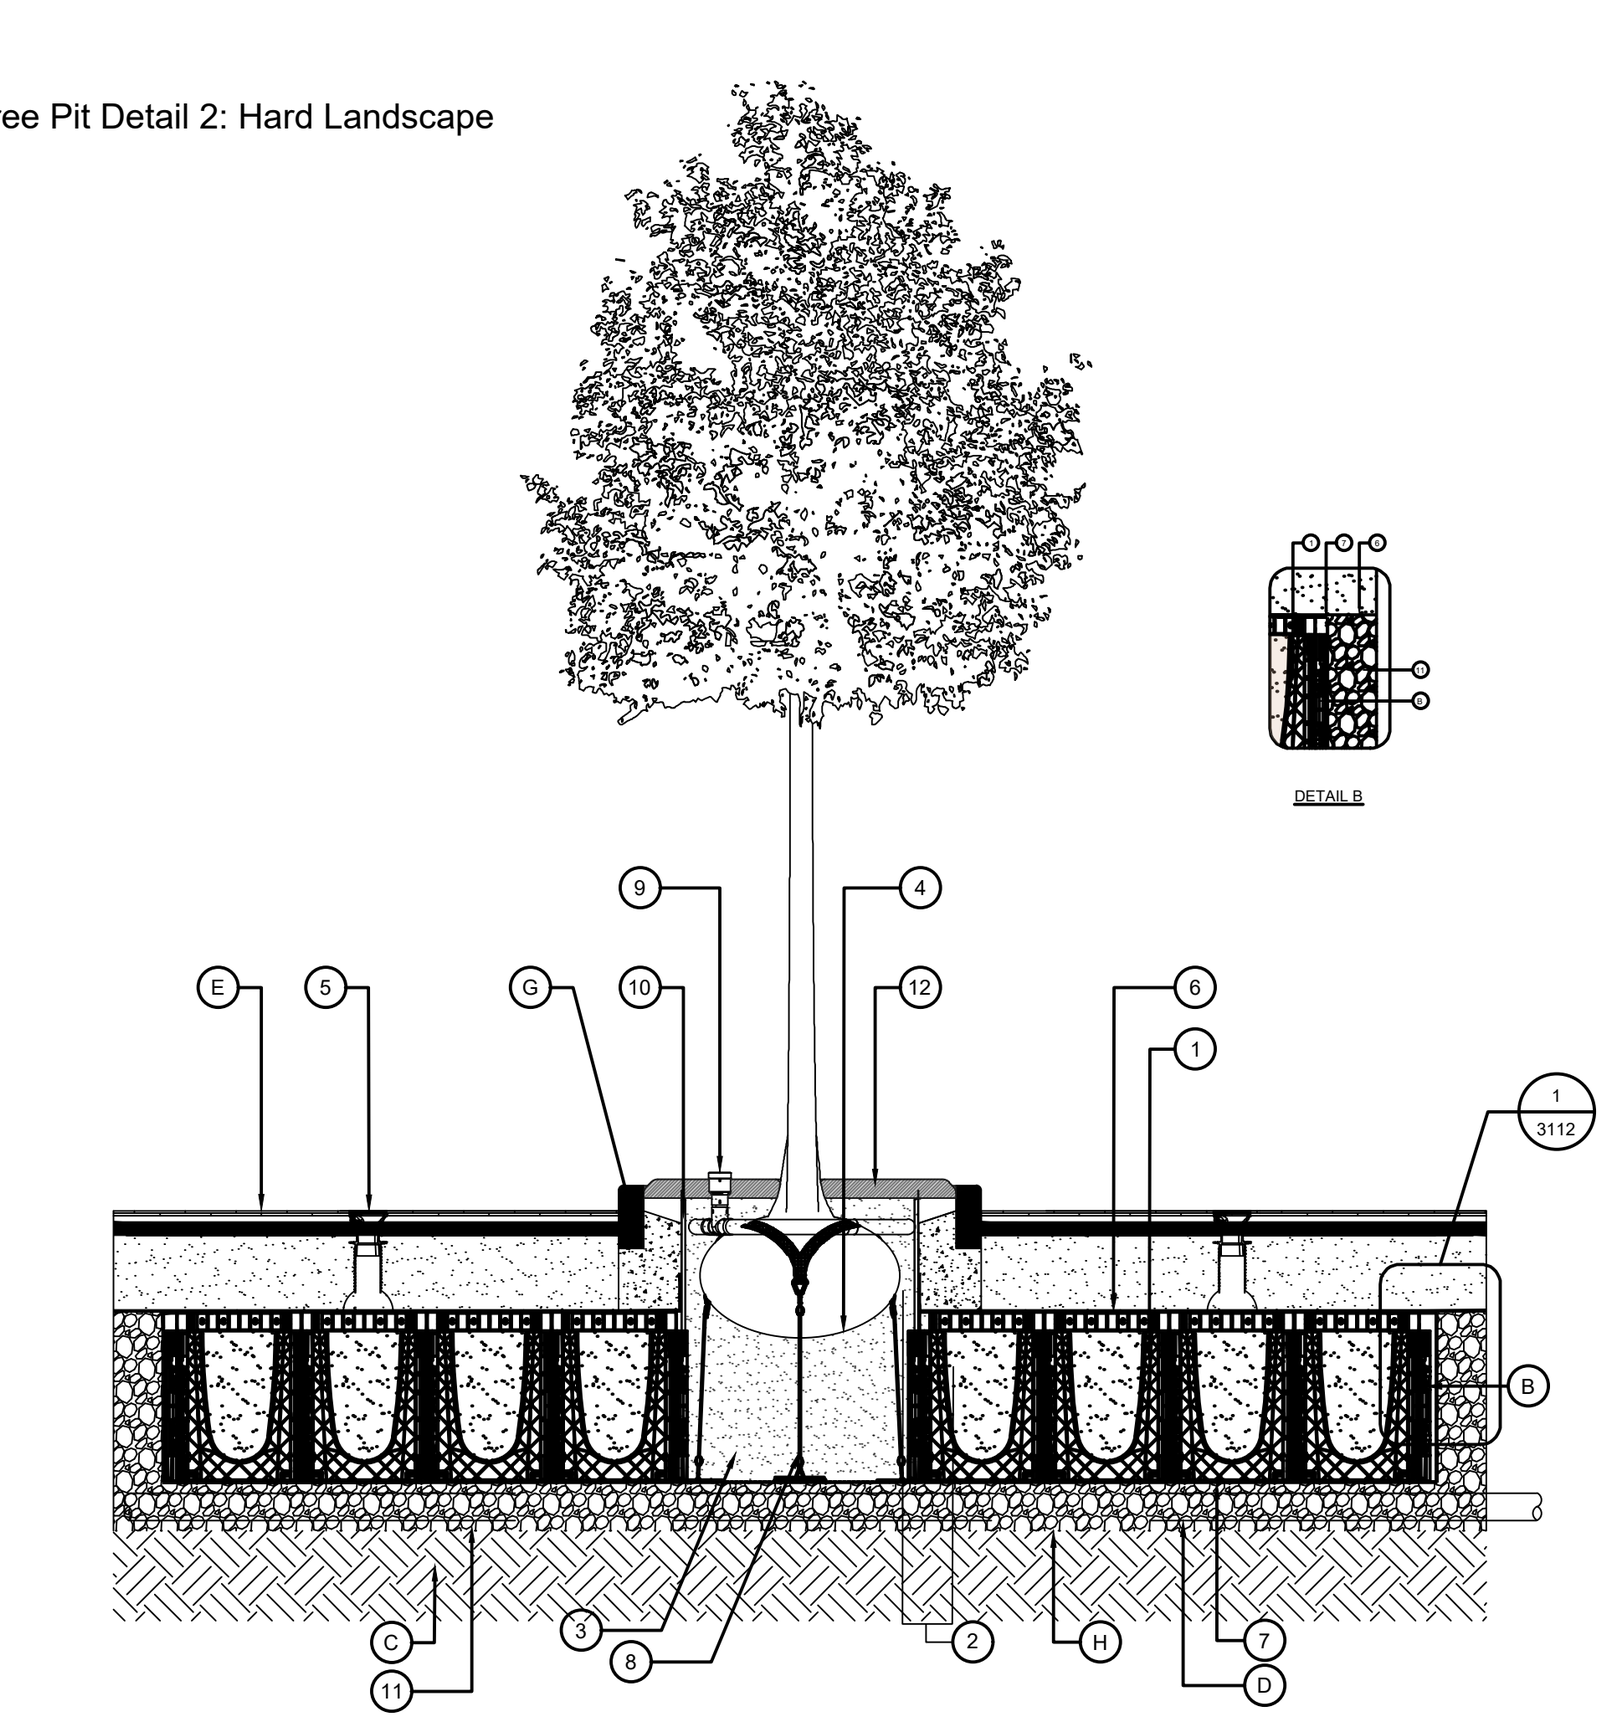

PACKAGE INCLUDES THE FOLLOWING GREENBLUE URBAN PRODUCTS PER TREE:

1. ROOTSPACE @ 600mm DEPTH (1 UNITS DEEP) C/W TWIN WALLED GEONET & OPEN REINFORCING MESH - GBURS61A
2. ROOTSOIL 20 TOPSOIL FOR USE WITHIN TOP 600mm OF SOIL PROFILE - ROOTSOIL20
3. ROOTSOIL SUB SUBSOIL FOR USE WITHIN SOIL PROFILES 600mm OR DEEPER - ROOTSOILSUBA
4. ROOTSTART PROFESSIONAL MYCORRHIZA FUNGI ALLOW 200g PER TREE - RSPMF2.5LA
5. ROOTRAIN ARBORVENT CAST ALUMINIUM TRAFFICABLE AERATION INLET WITH 150mm SQUARE TOP AND MANIFOLD - RRARBV150B
6. TWIN WALLED STRUCTURAL GEONET (INCLUDED IN ITEM 1) SEE NOTE (A) - GLTWGNA
7. 20mm OPEN REINFORCING MESH (INCLUDED IN ITEM 1) SEE NOTE (A) - GRN20A
8. ARBORGUY ANCHORPLATE STRAPPED ANCHOR SYSTEM - SASAP06A
9. ROOTRAIN URBAN IRRIGATION SYSTEM - RRURB1A
10. REROOT 600 ROOT BARRIER 600mm DEEP WITH ROOT DEFLECTING RIBS. USE RERJTA REROOT JOINTING TAPE FOR ANY OVERLAPS - RER600A
11. 10 - 20mm CLEAN ANGULAR DRAINAGE AGGREGATE - GBUDRSA
12. ARBORMULCH BARK MULCH - GBUMULCHA

NOTES:

A. ALLOW 20% ADDITIONAL FOR GEOTEXTILE AND REINFORCED GEOGRID FOR OVELAP AND CUTTING REQUIREMENTS
B. INSTALL ROOTSPACE SIDE PANELS TO INSTALLATION AS DIRECTED BY ENGINEER
C. EXISTING GROUND
D. POSITIVE DRAINAGE PIPE (110mm PERFORATED PIPE)
E. BUILD-UP TO SUIT ENGINEER DESIGNS AND REQUIREMENTS
F. SOFT LANDSCAPE AREA
G. KERB (AS PER STANDARD)


STRUCTURAL ENGINEER'S NOTE:

H. ADDITIONAL TWINWALL GEONET (GLTWGNA) TO BE INSTALLED WHERE SUB-BASE IS INSTALLED BELOW 3% CBR - MINIMUM 2% CBR OF FORMATION LEVEL TO BE ASSESSED BY ENGINEER

Note:
- Width and length varies to achieve minimum desired m³ of growing medium appropriate to specified tree
- Sides of tree pits to be broken up if 'smearing' occurs as a result of excavation operations
- Trees to be supplied as rootballed or container grown specimens and comply with NPS standards
- Any treepit improvement material to be peat free
- Utility locations to be checked and confirmed prior to excavating treepits
- Utility providers easements/service protection requirements to be followed where trees are located in proximity to below ground services

Components as supplied from GreenBlue Urban or similar

Tree Pit Detail: Soft Landscape

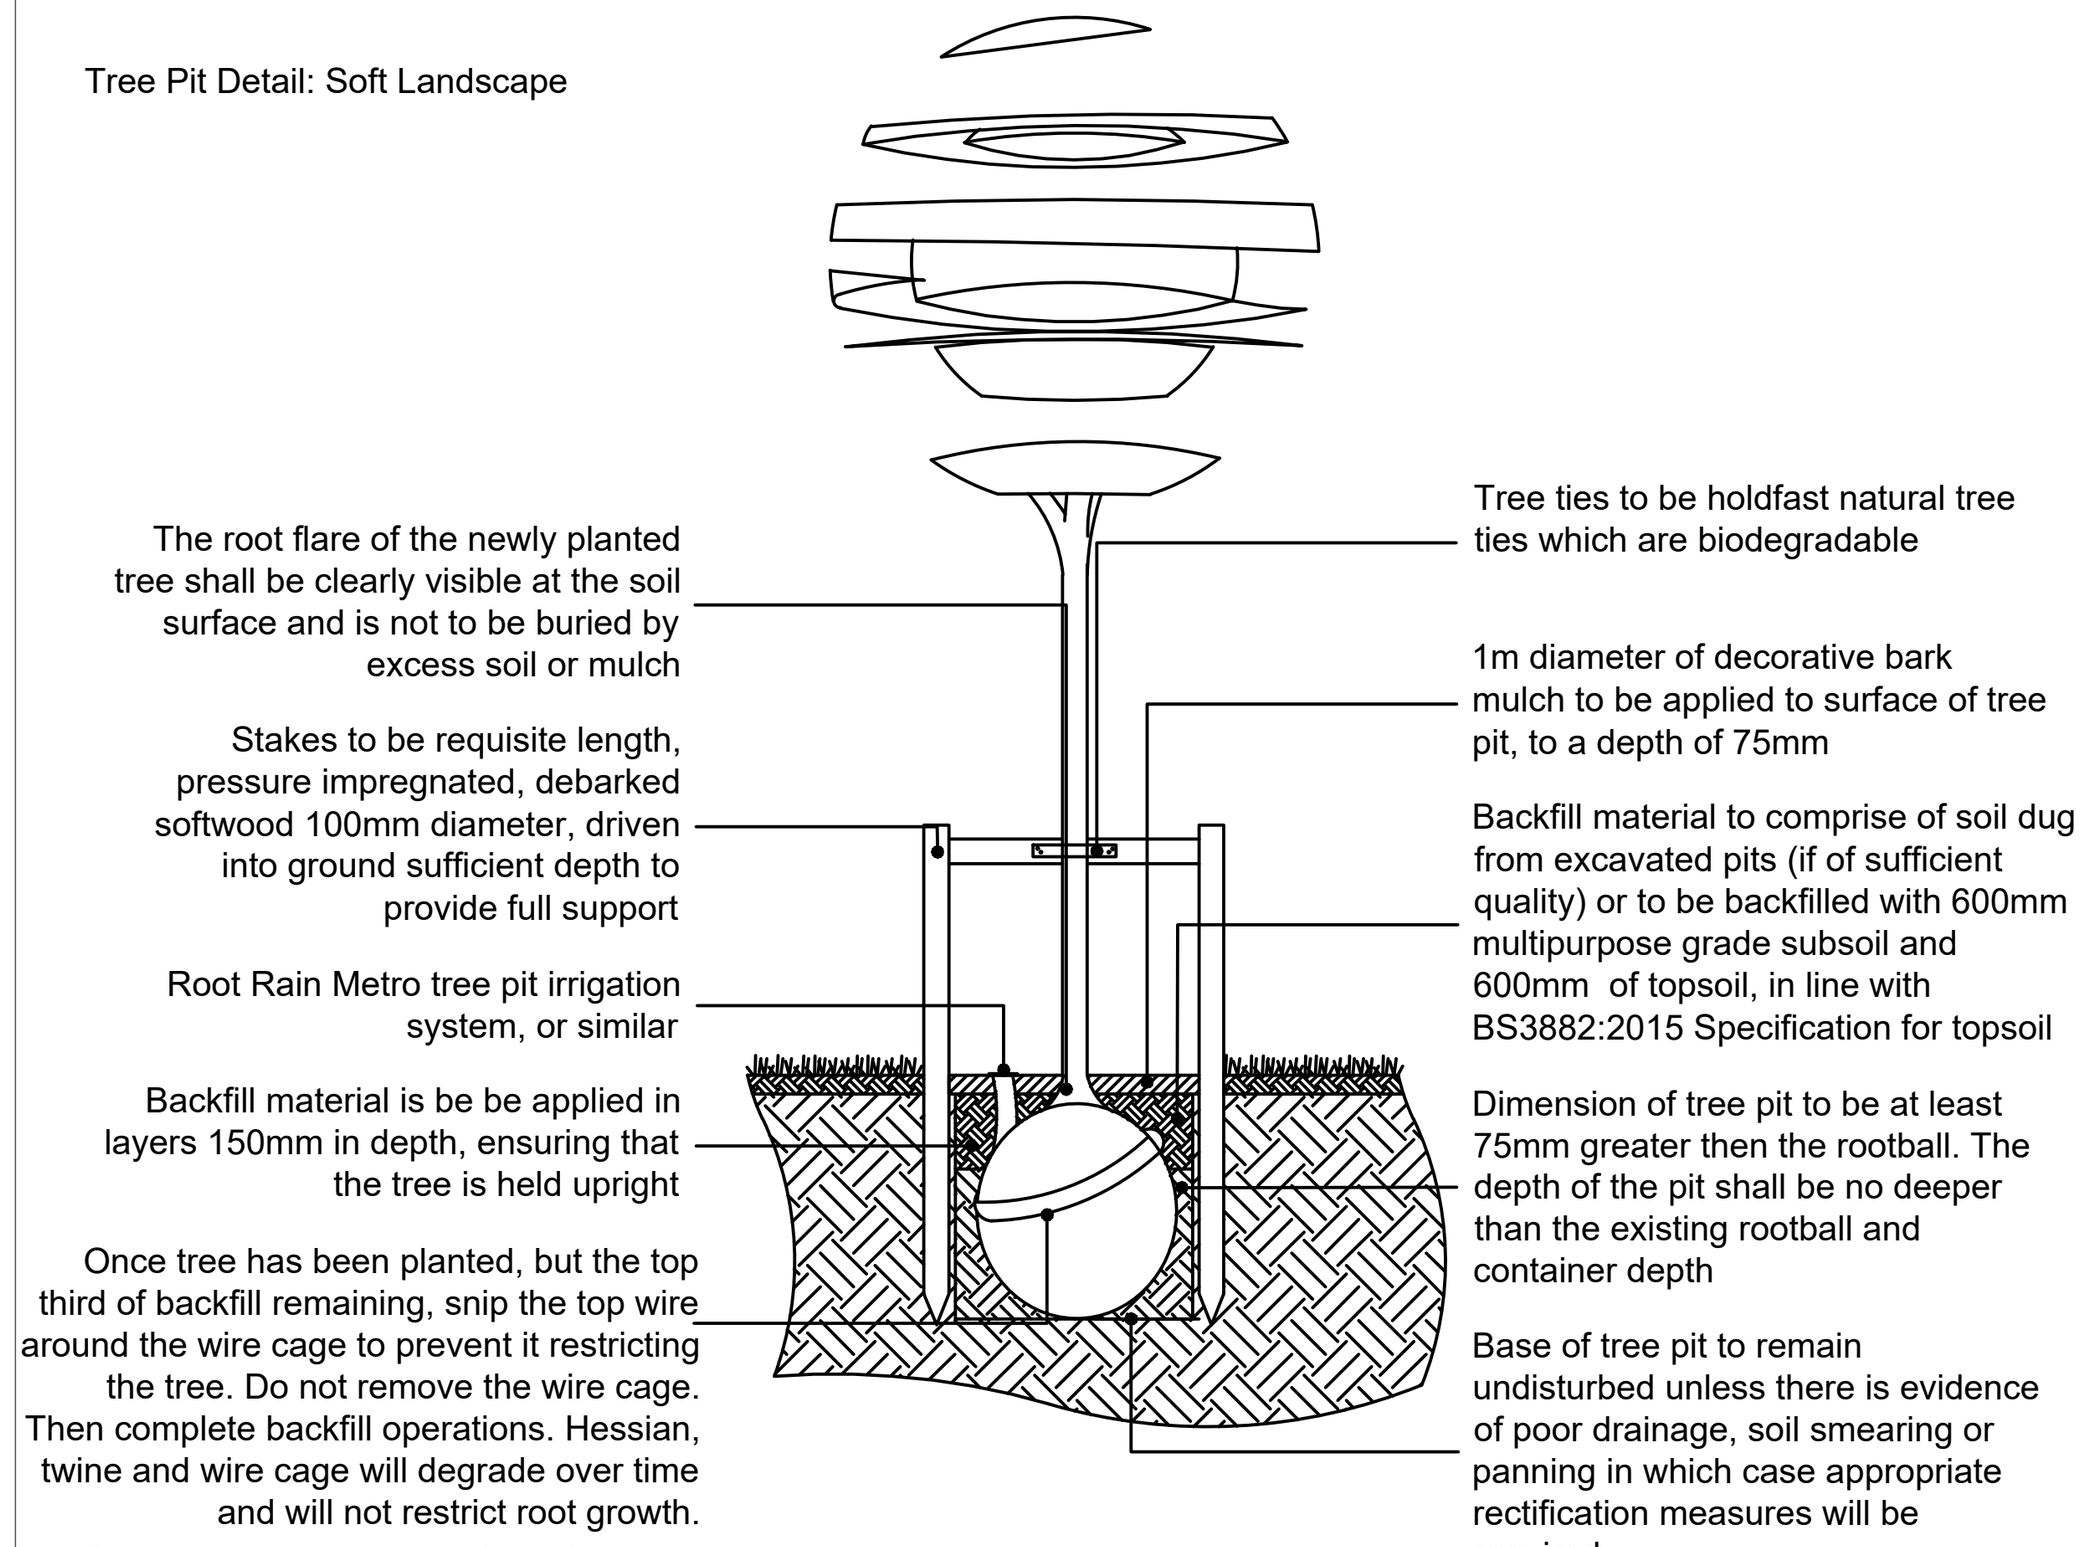

Components as supplied from GreenBlue Urban or similar

Rev	Date	Details	Drawn
Q	02.10.24	Comments	LS
P	30.11.23	Comments	LS
O	28.11.23	Comments	LS
N	05.04.23	Comments	LS
M	01.04.22	Comments	LS
L	30.03.22	Comments	LS
K	15.03.22	Comments	LS

ACD ENVIRONMENTAL

HEAD OFFICE
Rodbourne Rail Business Centre, Grange Lane, Malmesbury, SN16 0ES
Tel: 01666 825646

Suite 8 & 9, Courtyard House, Mill Lane, Godalming, GU7 1EY
Tel: 01483 425714

Suite 6, Crescent House, Yonge Close, Eastleigh, SO50 9SX
Tel: 02382 026300

Suite 50, Space Business Centre Gloucester, Quedgeley, Gloucester, GL2 4AL
Tel: 01452 887260

Suite GO3B, 1010 Cambourne Business Park, Cambourne, CB23 6DP
Tel: 01223 598598

email: mail@acdenv.co.uk
www.acdenvironmental.co.uk

miller homes

scheme: Land to the North West of Boorley Green, Winchester Road, Boorley, Phase 3
client: Miller Homes
drawing: Soft Landscape Proposals
date: September 2019
scale: 1:200@A1
drawing no: MILL22453 11P Sheet 2
drawn: LS checked: DKM

Copyright of ACD Environmental Ltd. All rights described in Chapter IV of the Copyright, Designs and Patents Act 1988 have been generally asserted. 2011. Copyright of this plan remains with ACD until all fees have been paid in full.