
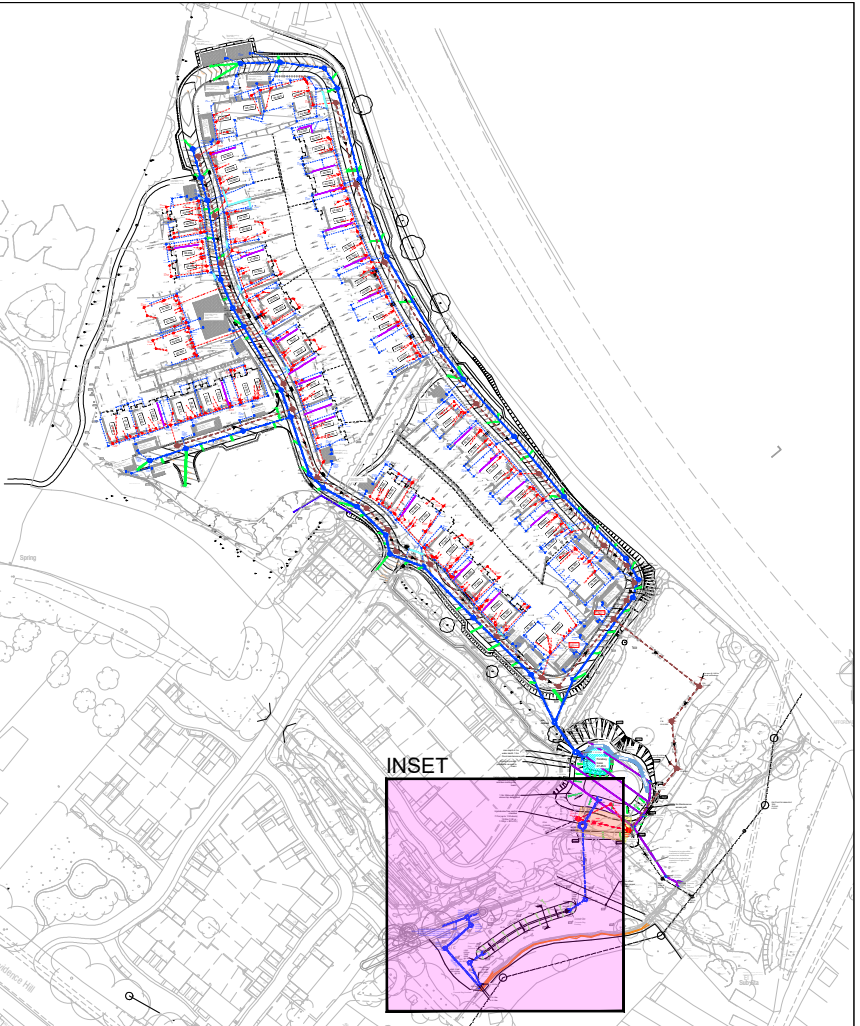


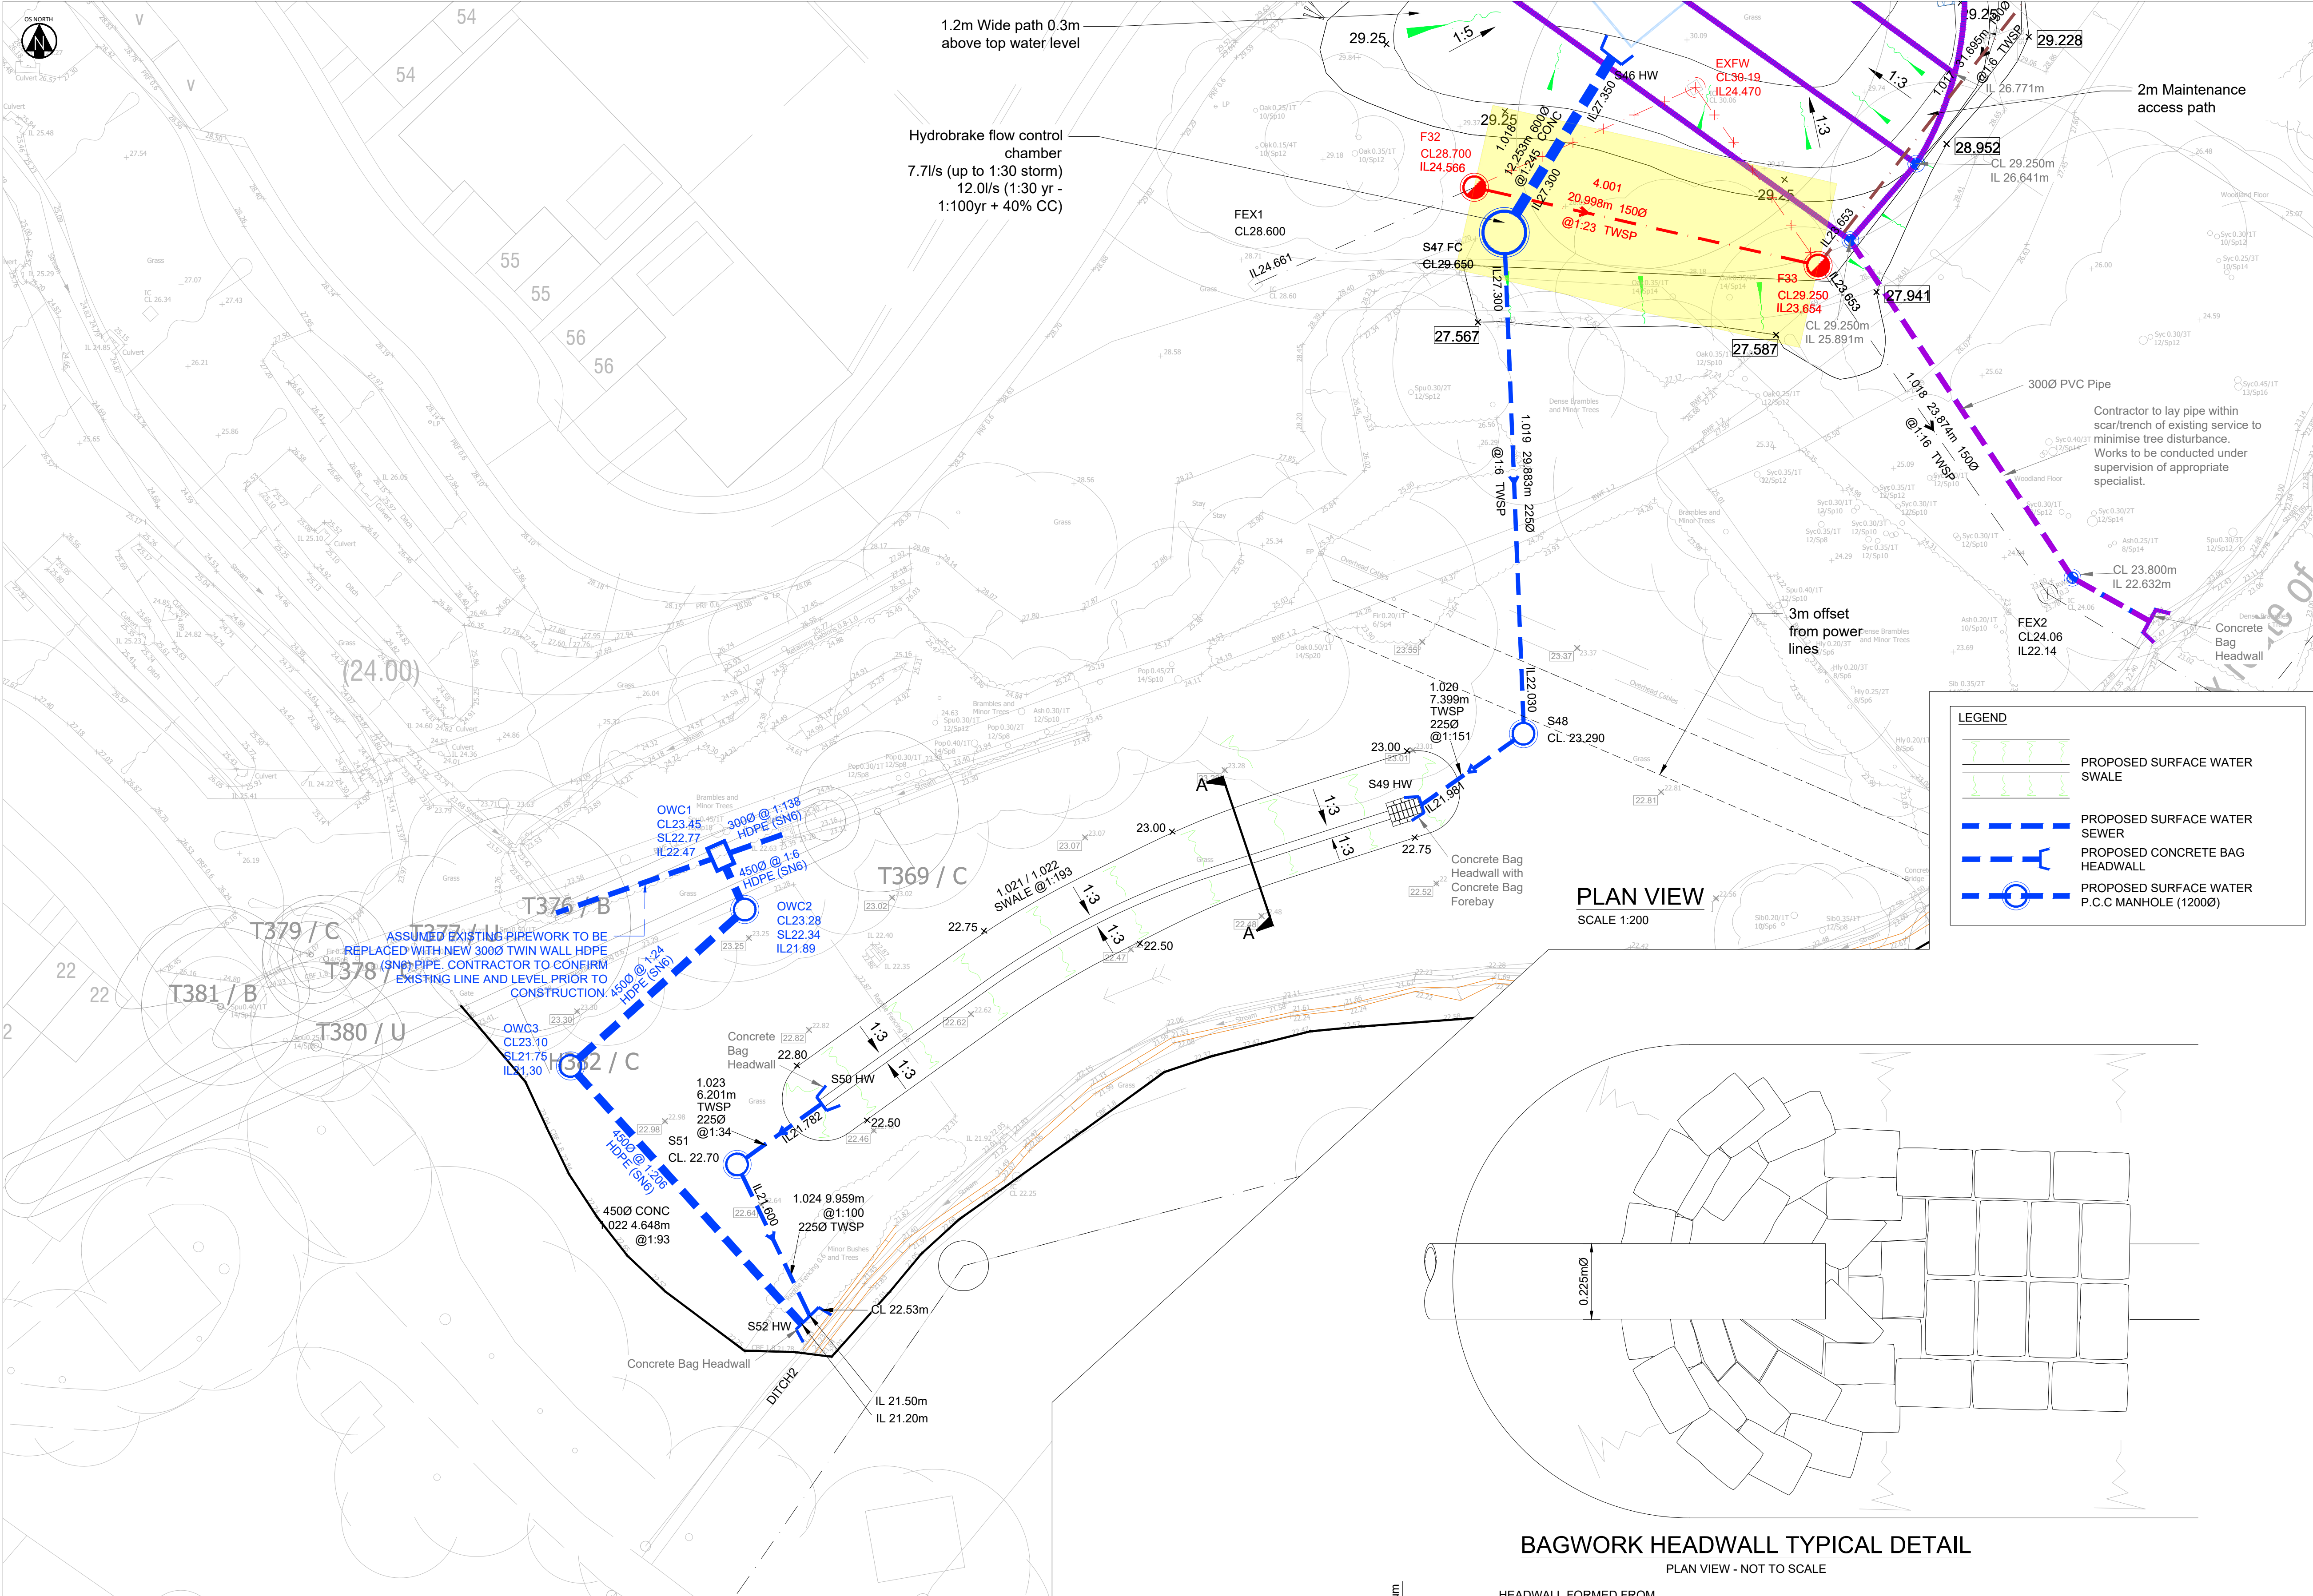

General Drainage Notes:

1. The planning, design and construction of sewers shall be in accordance with Sewers Sector Guidance Appendix C; Design and Construction Guidance, the Civil Engineering Specification for the Water Industry 7th Edition and Independent Water Networks Limited amendments to CESWI.
2. All Adoptable sewers within adoptable highway with less than 1.2m cover to have reinforced concrete slab protection. All Adoptable sewers within grassed areas with cover less than 0.9m to have reinforced concrete slab protection. All areas with greater cover than the minimum required to have type S bed and surround.
3. Use of this drawing does not absolve the client from his responsibilities under the Health and Safety: The Construction Design and Management Regulations 2015. The Principal Designer is required to contact Hydrop Consultants prior to permitting this drawing to be used in connection with any construction works.
4. All sewers to be laid soffit to soffit unless otherwise shown.
5. All levels are to OS datum.
6. Where sewers are to be constructed inside the restricted tree root zone a suitable tree root protection barrier is to be installed to Independent Water Networks Limited's specification.
7. Designs are subject to change through detailed design.
8. Refer to Hydrop Technical Note 21627-HYD-PO-XX-TN-C-0001 for details of the drainage strategy.

WORKS WITHIN OR IN PROXIMITY TO ROOT PROTECTION ZONES ARE TO BE CONFIRMED BY ARBORICULTURALIST. ENGINEER TO BE ADVISED OF ANY AMENDMENTS REQUIRED.

HDPE (SN6) PIPEWORK PROPOSED TO LIMIT PLANT AND MANUAL HANDLING REQUIREMENTS, REDUCING IMPACTS WITHIN TREE PRESERVATION ORDER AREAS.

REVISIONS

C01 21/02/25 First Issue. JRC JRC JAC

Rev	Date	Description	By	Ckd	App
-----	------	-------------	----	-----	-----

Hydrock OVER COURT BARN
OVER LANE
ALMONDSBURY
BRISTOL
BS32 4DF
T: +44 (0) 1454 619533
e: bristol@hydrock.com

FOREMAN HOMES

LAND OFF MISERY LANE
PROVIDENCE HILL, BURSLEDON
SOUTHAMPTON

OUTFALL SWALE DETAIL

HYDROCK PROJECT NO. C-21627-C	SCALE @ A1 AS SHOWN	STATUS S4
STATUS DESCRIPTION FOR APPROVAL	REVISION C01	
DRAWING NO. (PROJECT CODE-ORIGINATOR-ZONE-LEVEL-TYPE-ROLE-NUMBER) 21627-HYD-XX-XX-DR-C-0625		