


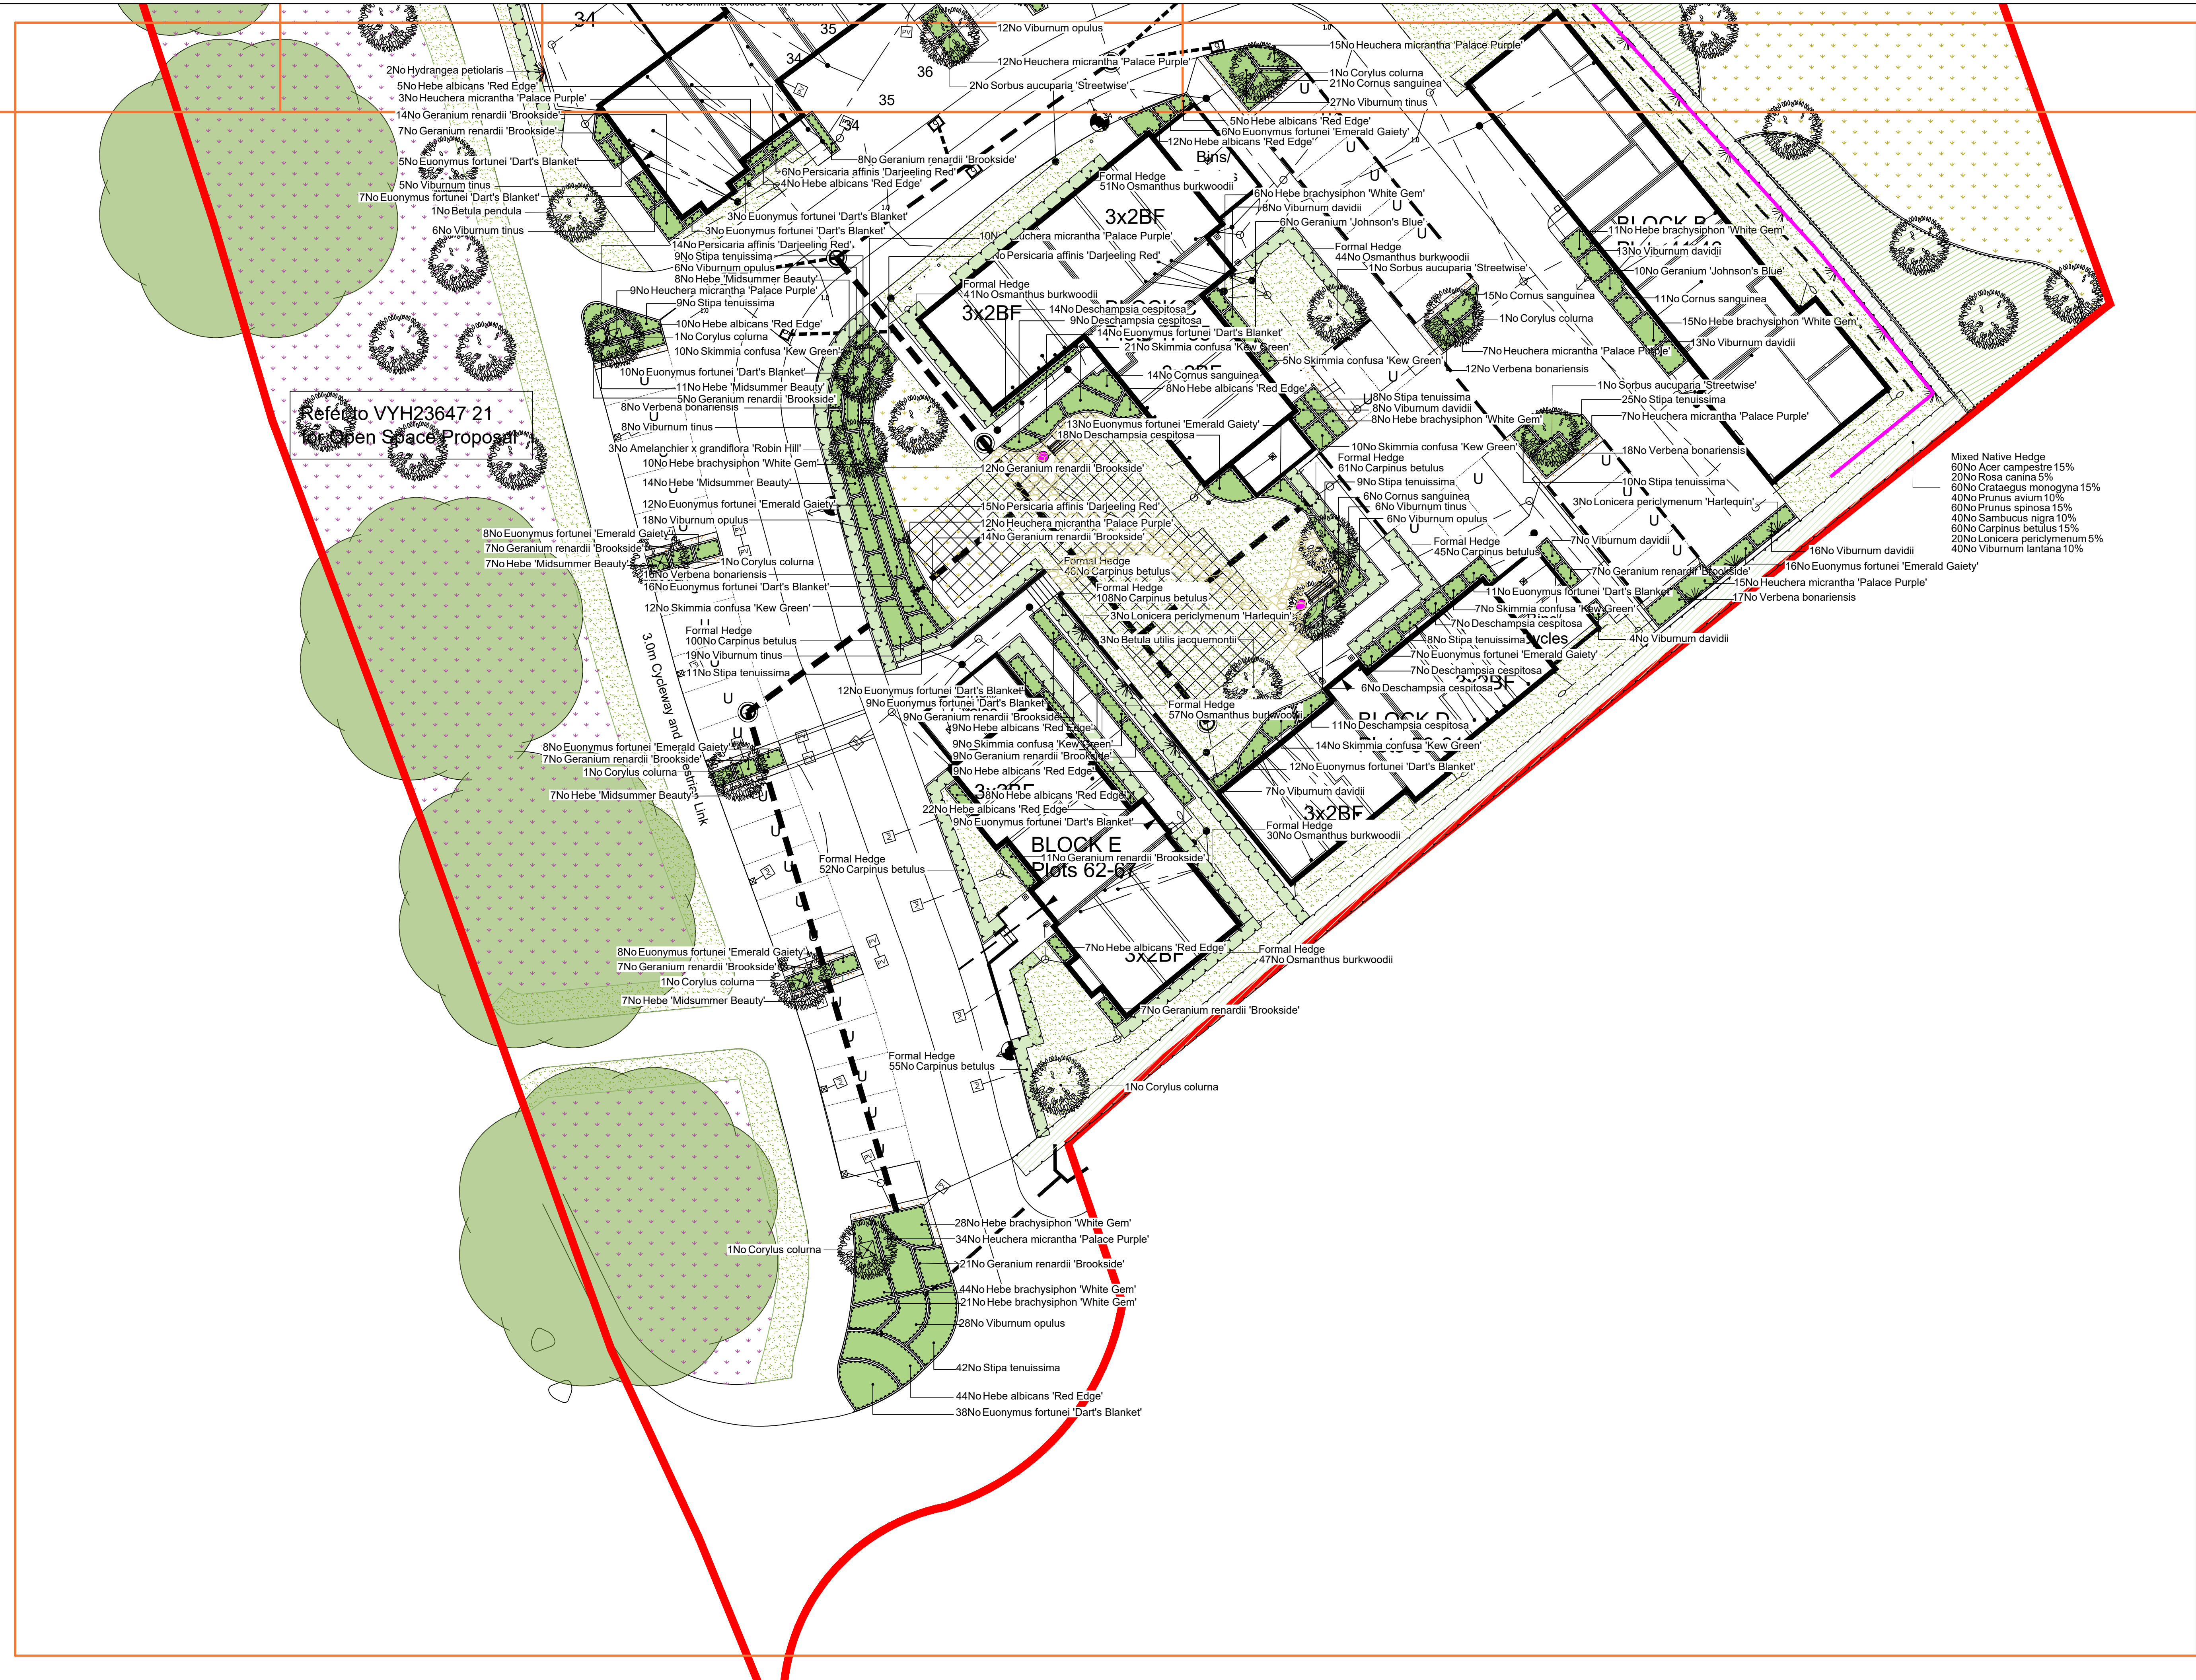

Refer to VYH23647-21
for Open Space Proposal

SPECIFICATION
All works generally, to comply with the written Soft Landscape Specification.

NOTES:
DO NOT SCALE FROM DRAWING
NOT FOR CONSTRUCTION, FOR PLANNING PURPOSES ONLY

Legend

- Existing trees to be retained and protected during construction
- Proposed tree planting within soft landscape. See detail on sheet 1
- Proposed tree planting within hard landscape. See detail on sheet 1
- Proposed formal hedge planting to be planted in a double staggered row 300mm apart and at 400mm centres in each row. To be maintained at 1m height. 3 strand galvanneal wire and tensioned softwood timber post fence, to BS1722-2:2020 Fencing.
- Proposed mixed native hedge planting to be planted in a double staggered row 300mm apart and at 400mm centres in each row. To be maintained at 1m height and 1.8m height adjacent to site boundaries. 3 strand galvanneal wire and tensioned softwood timber post fence, to BS1722-2:2020 Fencing.
- Proposed shrub planting to receive 75mm bark mulch after planting operations
- Proposed native mix shrub planting to be planted in groups of 5-7no. of each species and as above
- Proposed meadow grassland to be seeded with EM2 Mixture as supplied by Emorsgate and sown at 4 grams per msq, or similar and approved.
- Proposed meadow grassland to be seeded with EW1 Woodland Mixture as supplied by Emorsgate and sown at 4 grams per msq, or similar and approved.
- Proposed grass areas to receive good quality amenity grass turves laid in line with good horticultural practices
- Proposed SUDs to be seeded with EM8 seed mix as supplied by Emorsgate. Seeds and sown at 4 grams per msq, or similar and approved
- Proposed self-binding gravel through open space and natural green areas (Brexton Golden Amber, or similar and approved), edging shall be steel 'Everedge' or similar and approved
- Proposed 400mm wide 75mm depth bark mulch strip over weed proof membrane to abut planting adjacent to sides or ends of parking bays
- Proposed timber bench & bin RBA8 & J2822 from Proteccio or similar and approved. The material to be used for the benches as follows:
 - Cast iron legs and armrest with anti oxidizing primer and varnish finish.
 - Hot-dip galvanised screws
 - Exotic Wood such as: Wood Supapira (Leisure Cadea) Langside treatment, Iruera Glaze (brand name).
 - All Wood used is to be FSC certified.
- Carbon retaining wall, refer to engineers design details, specification and layout
- Cut lines - See sheet location plan on sheet 4

Services

- Proposed position of Storm Water Sewer & Inspection Chamber. See drainage engineer design for details
- Proposed position of Foul Sewer & Inspection Chamber. See drainage engineer design for details
- Proposed position of Underground Attenuation Tank. See drainage engineers design for details
- Proposed position of Foul Drain. See drainage engineers design for details
- Proposed position of Street Lighting Column. See lighting engineers design for details

Planting Schedule on Sheet 2

E	06.02.25	Amended to Comments	RH
D	13.12.24	Amended to Comments	RH
C	04.09.24	Amended to Comments	JH
B	22.11.23	Amended to Comments	RH
A	17.07.23	Amended to Comments	RH
Rev	Date	Details	Drawn

ACD ENVIRONMENTAL

HEAD OFFICE
Rodbourn Rail Business Centre, Grange Lane,
Malmesbury, SN16 0ES
Tel: 01666 825646

4 & 5 The Old Mill, Fry's Yard, Bridge Street,
Codrington, GU7 1HP
Tel: 01483 425714

Suite 6, Crescent House, Yonge Close,
Eastleigh, SO50 9SX
Tel: 02382 026300

email: mail@acdenv.co.uk
www.acdenviromental.co.uk

Vistry Homes

scheme: Boorley Green Gateway
Winchester Road, Botley

client: Vistry Homes

drawing: Landscape Proposals

date: May 2022

scale: 1:200@A1

drawing no: VYH23647 11 Sheet 4

drawn: RH/RK checked: DKM

Copyright of ACD Environmental Ltd. All rights described in Chapter IV of the Copyright, Designs and Patents Act 1988 have been generally asserted. 2011. Copyright of this plan remains with ACD until all fees have been paid in full.