


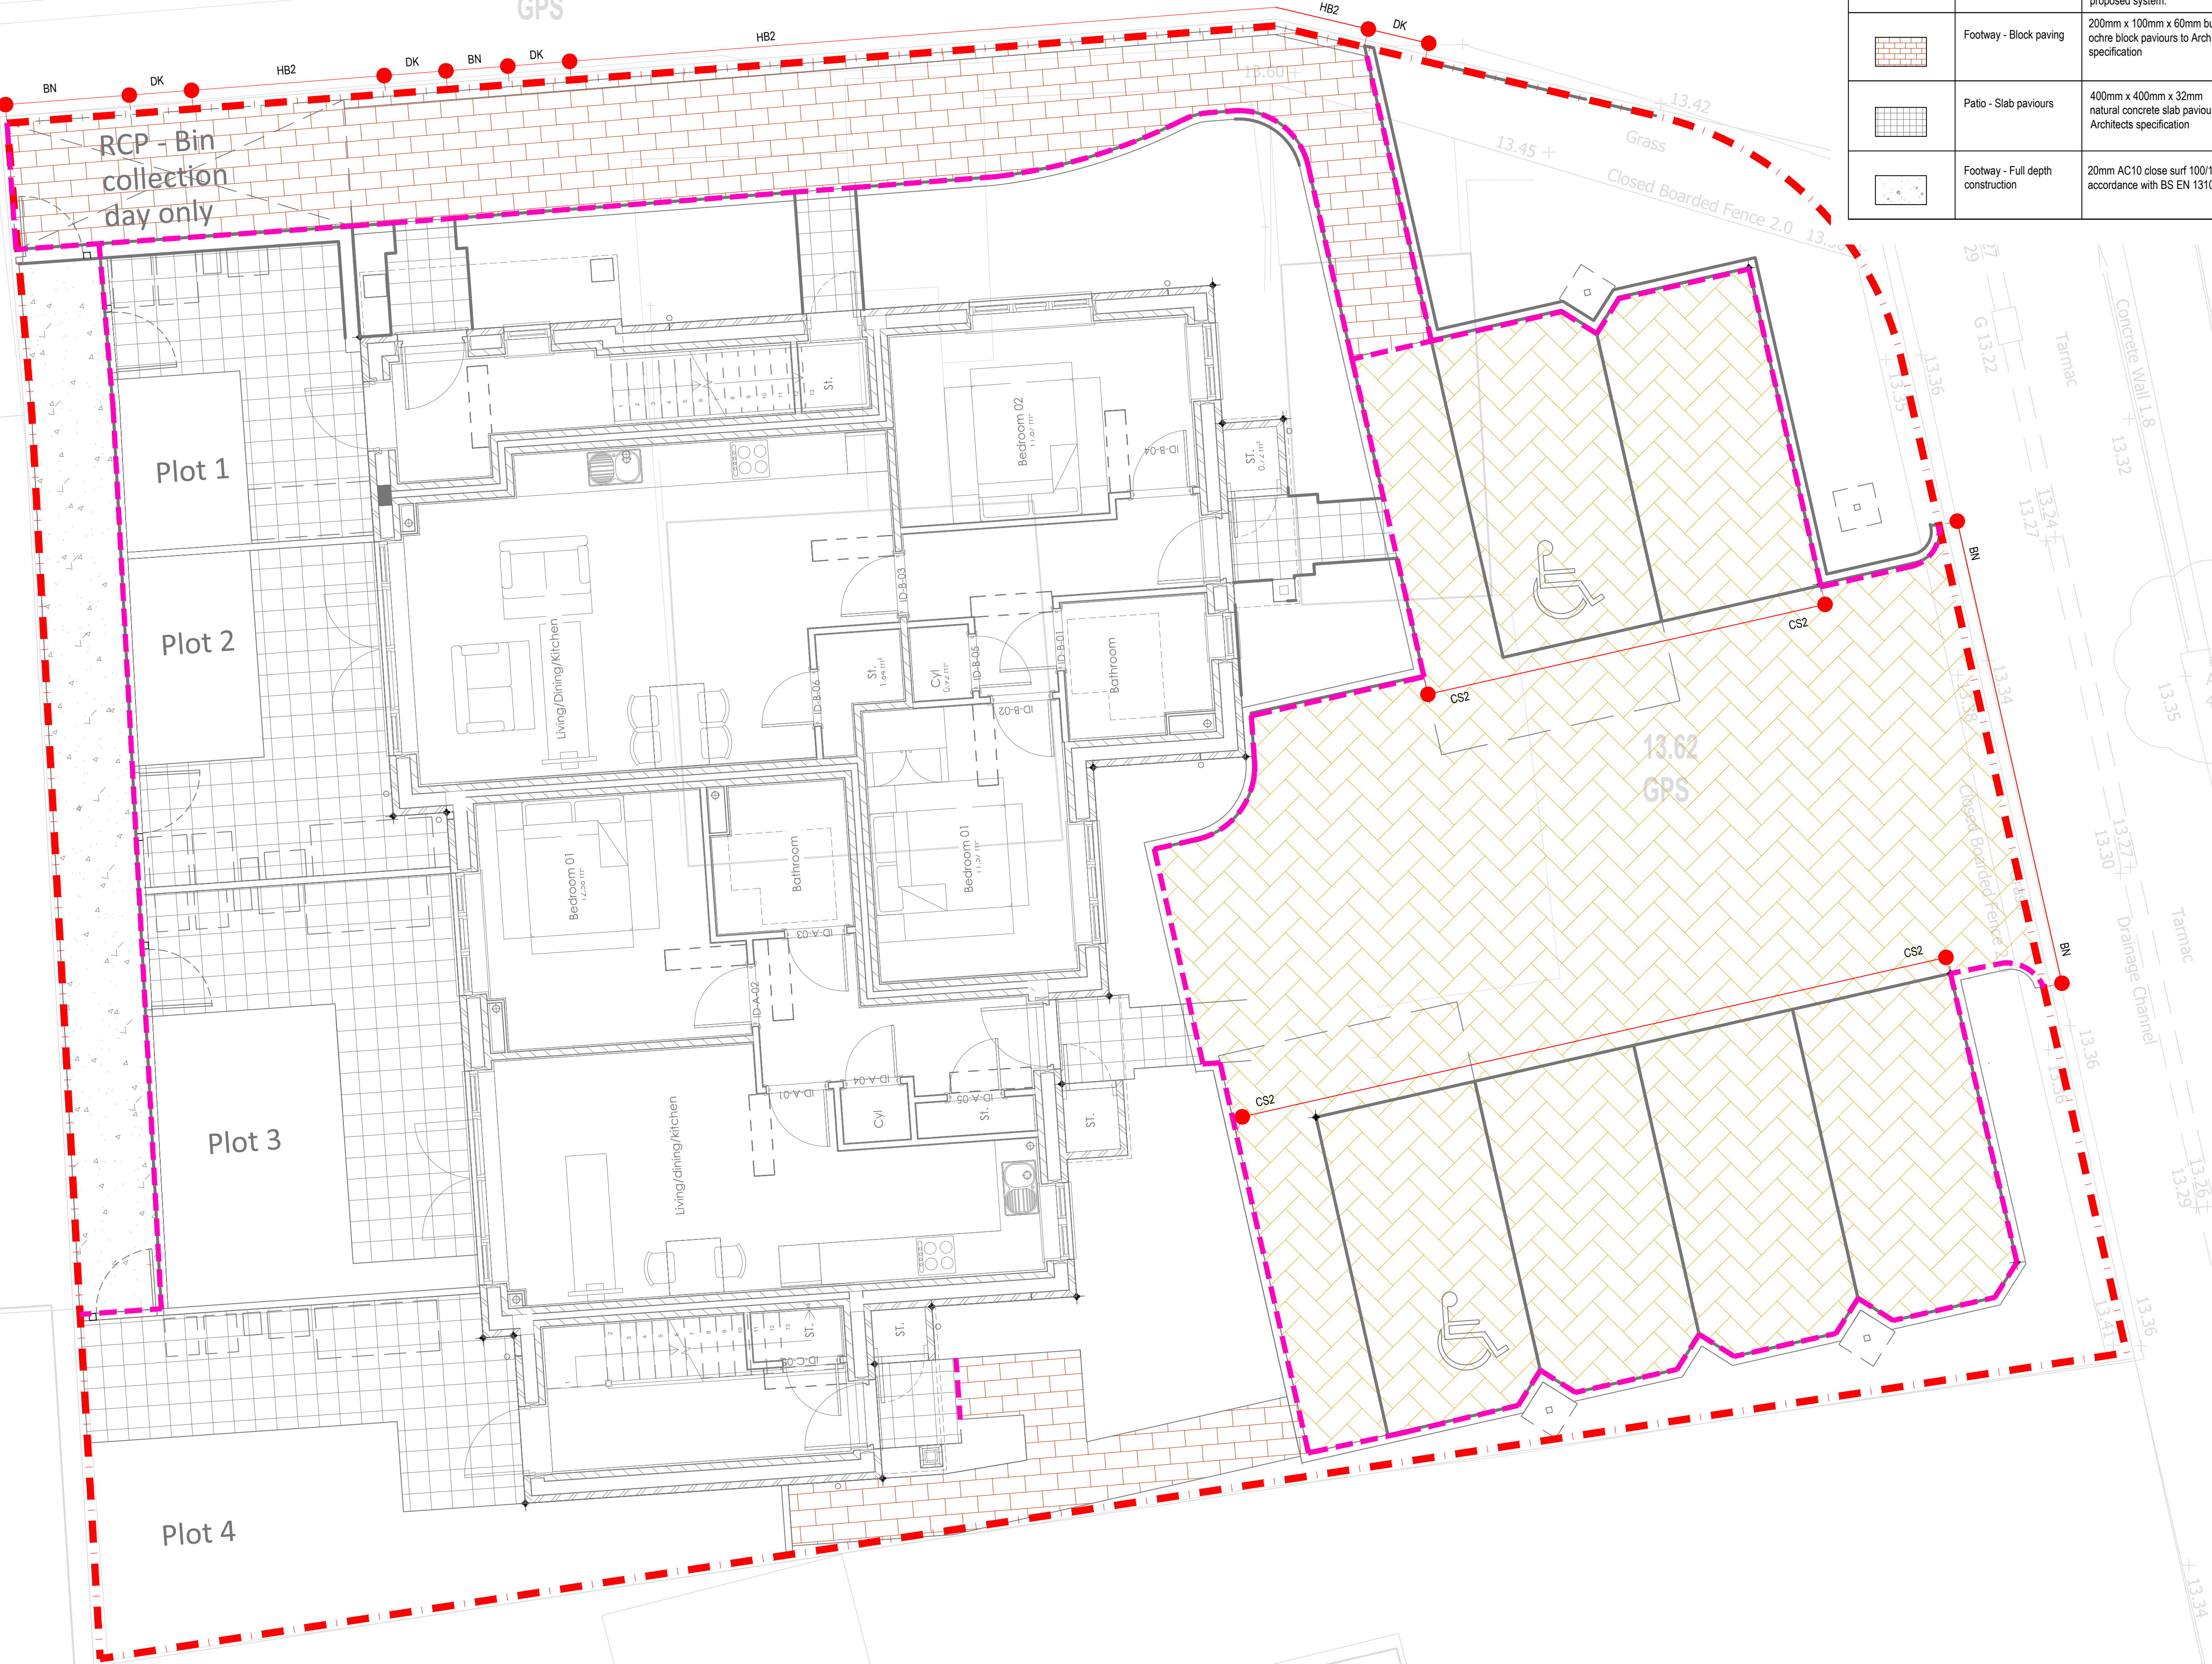

Key	Description	Surface Course	Binder	Base	Sub-Base
	Carpark - Permeable Block paving	60mm permeable block pavers to BS EN 1338 laid in herringbone style. Contractor to confirm proposed system.	50mm aggregate to be 2/6.3 Gc 80/20 in accordance with BS EN 13242:2007	Terram 1000 geotextile or similar approved	350mm Type 3 sub-base to DTP Spec Clause 803. Consult engineer if onsite CBR values <5%.
	Footway - Block paving	200mm x 100mm x 60mm burnt ochre block paviours to Architects specification	30mm compacted thickness Cat II sand laying course	-	150mm Type 1 sub-base to DTP Spec Clause 803
	Patio - Slab paviours	400mm x 400mm x 32mm natural concrete slab paviours to Architects specification	30mm compacted thickness Cat II sand laying course	-	150mm Type 1 sub-base to DTP Spec Clause 803
	Footway - Full depth construction	20mm AC10 close surf 100/150 in accordance with BS EN 13108.	50mm thick AC20 dense bin 40/60 in accordance with BS EN 13108	-	225mm Type 1 sub-base to DTP Spec Clause 803

Soil CBR to be confirmed onsite before commencement of works

Sub-grade CBR	Type 1 Sub-base
7%	100mm
5%	150mm
3%	250mm
2%	325mm
<2%	CONSULT ENGINEER

Table 1
Based on table 8/1 in accordance with MCHW
Volume 1 clause 801.

- LEGEND
- HB2 • Half battered kerb - 255x125mm (100mm upstand)
 - BN • Bullnosed kerb - 225x125mm (laid flush)
 - CS2 • Channel kerb - square edge 255 x 125mm (laid flush)
 - DK • Drop Kerb - (dropped/transition kerb between HB2 and BN25)
 - Edging Kerb - 150x50mm square top (laid flush)

- Notes:
- Refer to Deacon Design dwg DD624L01 for landscape architects surface specifications.
 - Pavement construction design based on NHCBC Section 10.2 and CD 239 Pavement Design guidance.
 - Kerbs to be in accordance with Hampshire County Council (HCC) standard details. Refer to HCC standard details online at hants.gov.uk.
 - S278 works to be undertaken in accordance with HCC model contract specification for developers.

T7	01.05.25	Carpark made permeable paving	MB	MB
T6	14.04.25	topo added	MB	MB
T5	17.03.25	Revised for RSA comments	MB	MB
T4	08.04.24	Sand laying course added to carpark block paving	MB	MB
T3	20.02.24	HB2 upstand revised in line with HCC standard details	MB	MB
T2	23.01.24	Revised to approved planning finishes	MB	DG
T1	17.01.24	Tender issue	MB	DG

Rev Date Description By Apvd

PROJECT:
NIGHTINGALE AVE, EASTLEIGH

TITLE:
EXTERNAL FINISHES

CLIENT:
DOSWELL PROJECTS

SCALE@A1:
1:50

PROJECT REF:
23270
DRAWING No:
700

REV:
T7

Revision Referencing
P = Preliminary A = Approval T = Tender C = Construction

Jubb

Bristol, Cardiff, Plymouth, Winchester
St James Court, St James Parade, Bristol BS1 3LH

jubb.uk.com
+44(0)117 922 6266