

Subject:

FW: DC/25/99373 Hatts Copse Farm, Botley - landscape comments

Sent: 29 May 2025 13:22

Subject: Re: DC/25/99373 Hatts Copse Farm, Botley - landscape comments

Hi Rebecca,

It appears that matching updated landscape plans have been submitted for both this application and also for DC/25/99034.

My additional minor comments below will therefore apply to both applications:

Landscape Masterplan


a/ Trees in grass to be mulched with 1m diameter medium grade bark mulch min 50mm deep.

b/ Add bold note: '**During prolonged dry spells all new trees watered with min. 40L of water per tree, 2 x per week min.'**

c/ Supply all trees & hedge planting with rabbit guards.

Landscape Plan 1 of 2

d/ Please make this symbol for the section of hedge clearer:

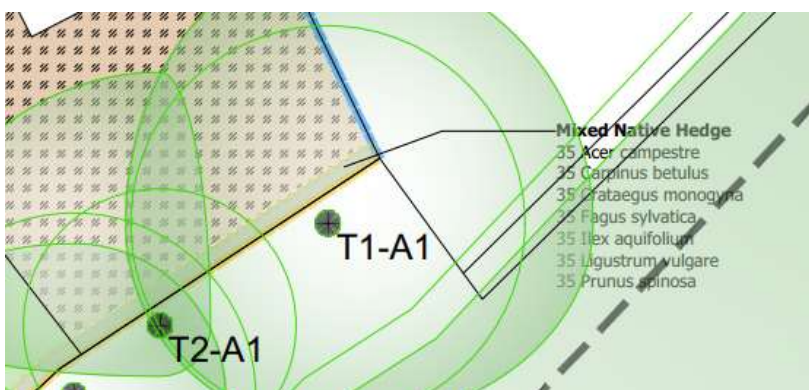

Can we have written assurances this can be delivered as it abuts a driveway and appears to be in a very narrow strip (i.e. is there sufficient soil rooting area for the hedge?). A site photo of the planting strip would help.

Landscape plan 2 of 2

f/ All trees to be min. standard 8-10, 2.5-3m high

g/ Replace 1 Birch with a Field Maple (*Acer campestre*) or Wild Cherry (*Prunus avium*).

h/ All 10L shrubs at min. 2.5 plants per sq. m.

I look forward to receiving revised plans in due course.

KR Tim

Tim Griffin

Landscape Consultant

Working on behalf of Eastleigh Borough Council