

Sound Advice

A C O U S T I C S L T D

Noise Control Proposal

Client	AC English Developments
Project	External Plant at Unit 7, South Point, Ensign Way.
File Reference	SAE-1512
Issue	1
Document Date	02.06.2025
Prepared By	Mr Brian Scrivener 07976 630808 brian@soundadviceacoustics.co.uk

PROJECT INFORMATION

Client	AC English Developments
Prepared for	Mr Ryan English
Project Title	External Plant at Unit 7, South Point, Ensign Way.
Address	Unit 7, South Point, Ensign Way, Hamble Le Rice, SO31 4RF
Description	Installation of Acoustic Screen


PROJECT

These treatment proposals are to control the noise from the existing external plant compound to the proposed residential premises at Unit 9, South Point, Ensign Way, Hamble Le Rice, SO31 4RF.

Install a 3.0m high acoustic screen around the plant. This should be continuous in length and be sealed to the floor with no gaps and have a minimum density of 14kg/m²

ACOUSTIC ENCLOSURE PERFORMANCE

ACOUSTIC PERFORMANCE (dB) - CENTRE BAND FREQUENCY									
Frequency	63 Hz	125 Hz	250 Hz	500 Hz	1000 Hz	2000 Hz	4000 Hz	8000 Hz	Rw dB
TRANSMISSION LOSS	8	14	16	21	25	29	30	32	25

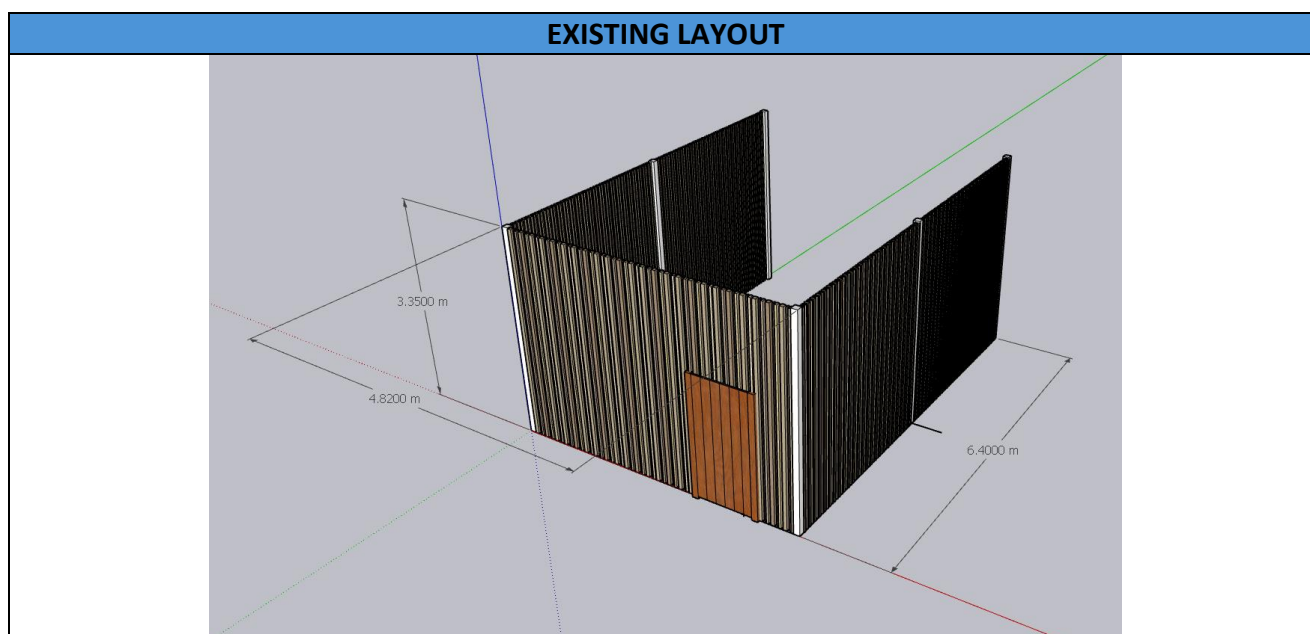

Unit 2 West Links, Tollgate, Chandlers Ford, Hampshire, SO53 3TG

 0800 180 4005
 023 8025 4774
 info@soundadviceacoustics.co.uk

VAT Number 837 5774 82 Company Number 4991799





SH7295



4035

PROPOSED LAYOUT

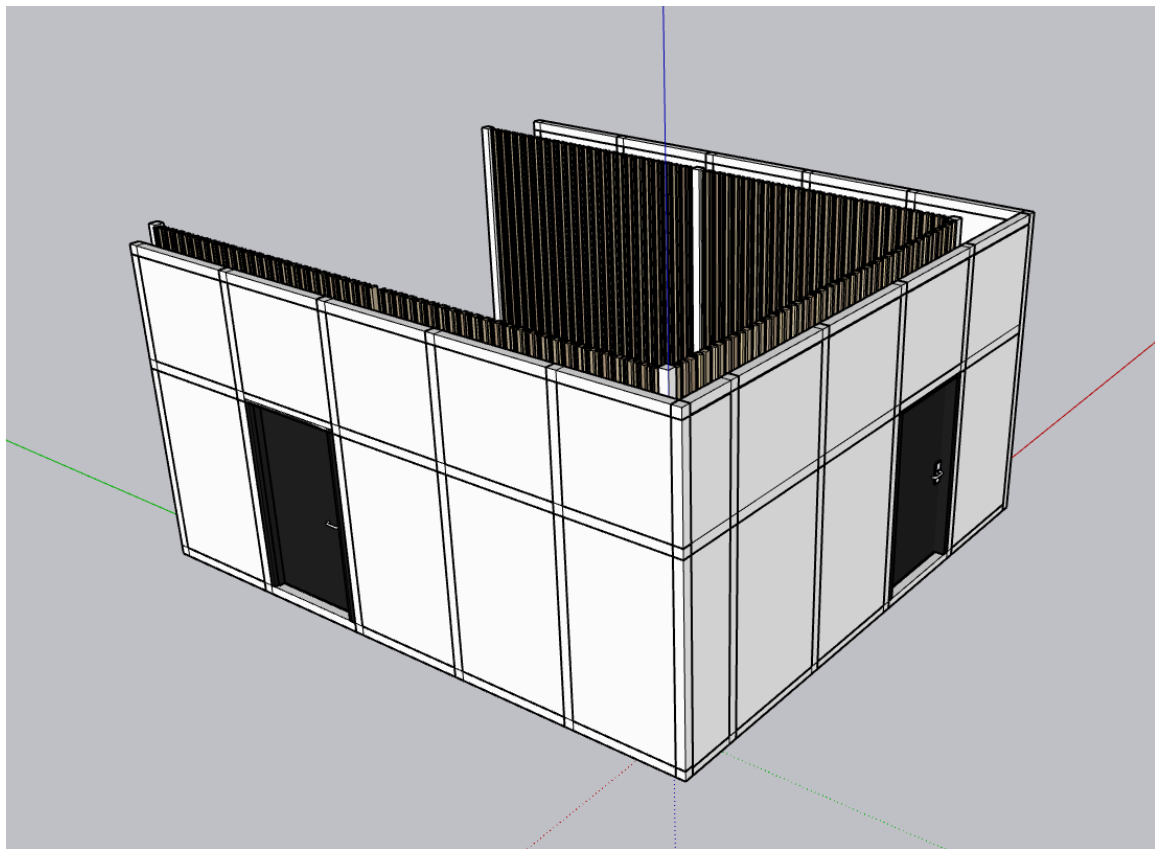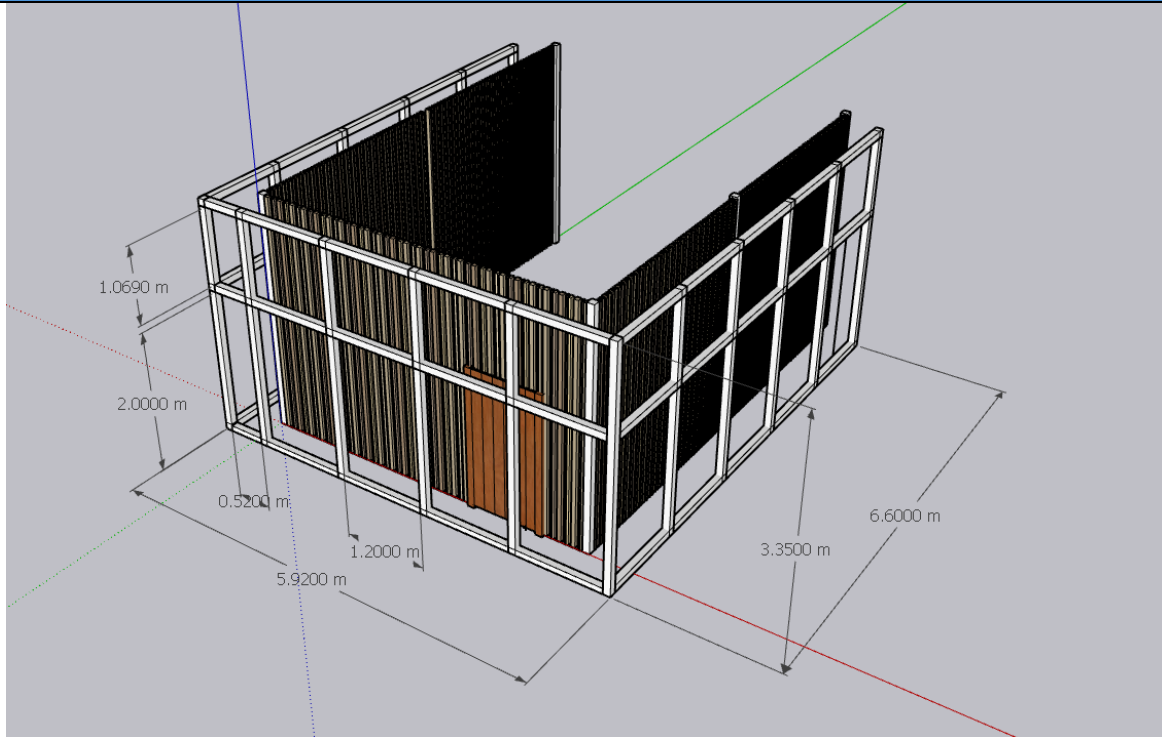

Unit 2 West Links, Tollgate, Chandlers Ford, Hampshire, SO53 3TG



0800 180 4005

023 8025 4774

info@soundadviceacoustics.co.uk

VAT Number 837 5774 82 Company Number 4991799



SH7295



4035

UKAS Accreditation for Building Regulations Approved Document E

INCLUSIONS

Our proposal includes for all of the following:

- Design, manufacture, delivery and installation.
- Site measurement of all necessary components.
- Fixings, angles, tiebacks, blanking panels and sealing / flashing around openings.

PROJECT MANAGEMENT

Health & Safety Plan - Submitted 10 working days before installation.

Method Statements & Risk Assessments - To be agreed 5 working days before installation.

COSHH Requirement - To be submitted 10 working days before installation.

INSURANCES

Professional / Products indemnity

Public Liability

Employers Liability

£10 million

LEAD TIMES

6 – 8 Weeks from Approved Drawings

POWDER COATING

To Any Standard RAL Colour

QUOTATION

To design, manufacture and install the aforementioned acoustic screen all for the sum of:-

£ 42,800.00 + VAT

VAT

Charged at the current rate

PAYMENT TERMS

50% with Order

25% On Site Attendance

25% On Practical Completion

Unit 2 West Links, Tollgate, Chandlers Ford, Hampshire, SO53 3TG



0800 180 4005



023 8025 4774



info@soundadviceacoustics.co.uk

VAT Number 837 5774 82 Company Number 4991799



SH7295



4035

UKAS Accreditation for Building Regulations Approved Document E