

T1 - Mulberry Tree. In acute decline with several historic failures. Fell. Replant with health standard by way of replacement.

T2 - Willow sp. With a heavy lean towards the Mill, river and car-parking area. Has a large cavity on the West side of the trunk. To Pollard at 10m.

T3 - Western Red Cedar (Kingfishers). Crown lift off the boundary wall allowing a 0.5-meter clearance of the listed wall.

T4 - Yew sp. (8 Winchester Street), to reduce the south and Eastern Canopy away from the building giving a 2m clearance, blend the side canopy back into top by reducing in height by 2m on the southeastern side. As shown in the attached photographs.

T5 - Maple sp. to utility line clear the central canopy, to abate the offending branch nuisance. Cuts no greater than 30mm.

T6 - Holly sp. To reduce the side of the canopy allowing a 2m building clearance.



T7 - Ash sp. first southern lateral branch foliage to tip reduce the secondary branch foliage off the neighbouring property giving a 2m building clearance. Stem diameter cuts no greater than 40mm.


T8 - Yew sp. (TPO) Highway elevation. To face back the growth over the footpath and carriage way (0.5m lower section up to 2.5m, crown lifting 0.5m above the lamppost for visibility splay as shown in the attached photograph

G9 - 3no Flat Lawson Cypress running along the boundary wall; overextended branch foliage now having outgrown space. To remove and replace with a manageable variegated hedge specimen.

G10 - 2no Apple Trees to re-prune back to the pre-existing cuts. 1.5m branch length foliage.



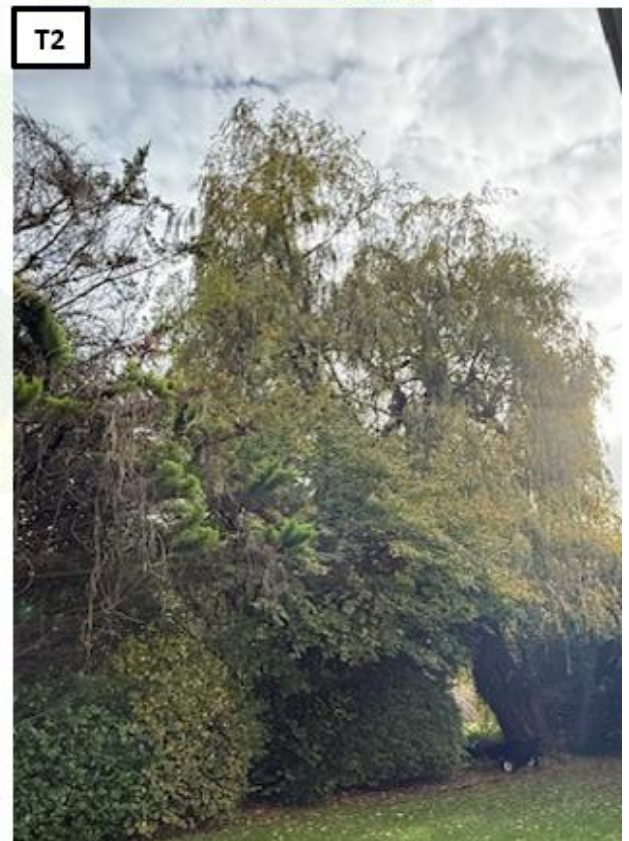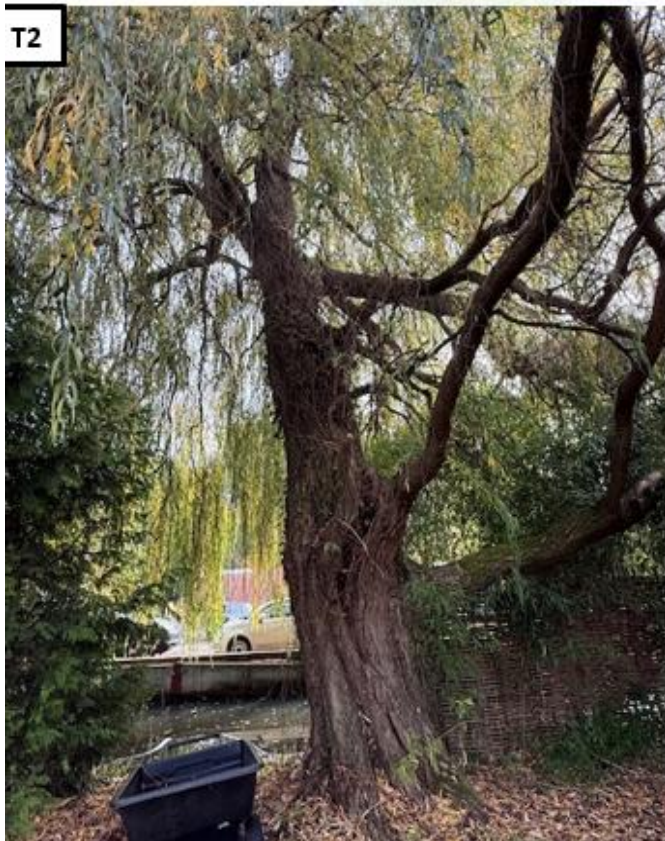

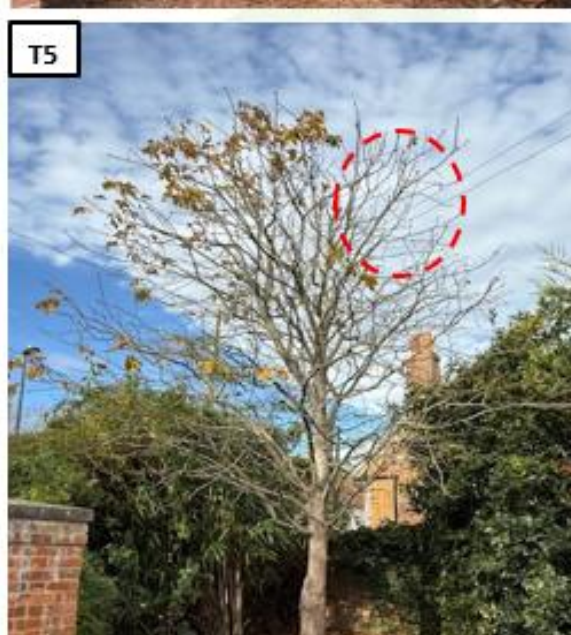

Please note: For example, purposes only and does not represent the finished shape as works to be carried out in accordance with BS3998(2010), nearest best practice pruning points.

