© Portakabin Ltd 2013 | Do not scale off this drawing, use figured dimension only. All discrepancies must be reported to Portakabin Limited.

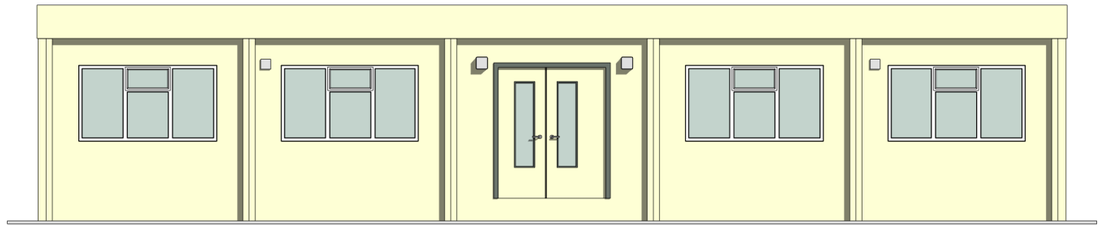

2 Front Elevation
1 : 100

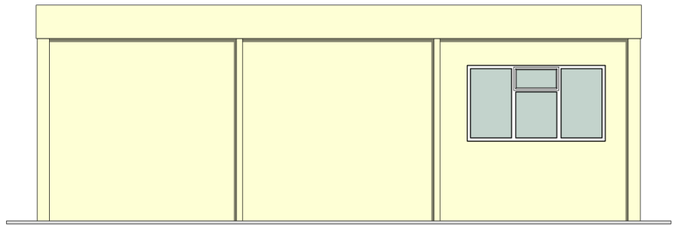

3 Right Elevation
1 : 100

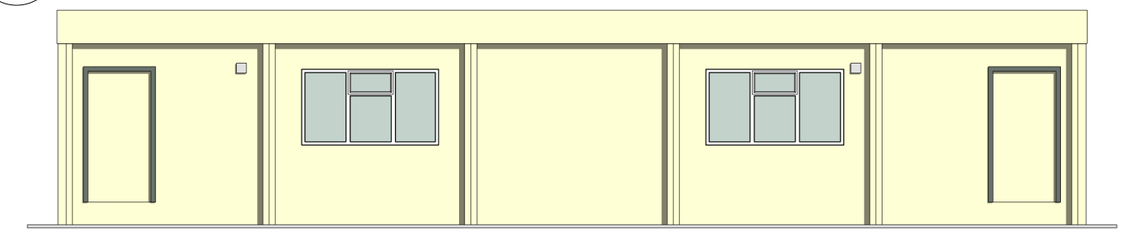

4 Rear Elevation
1 : 100

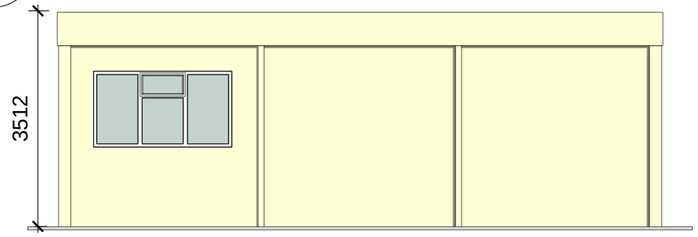

5 Left Elevation
1 : 100

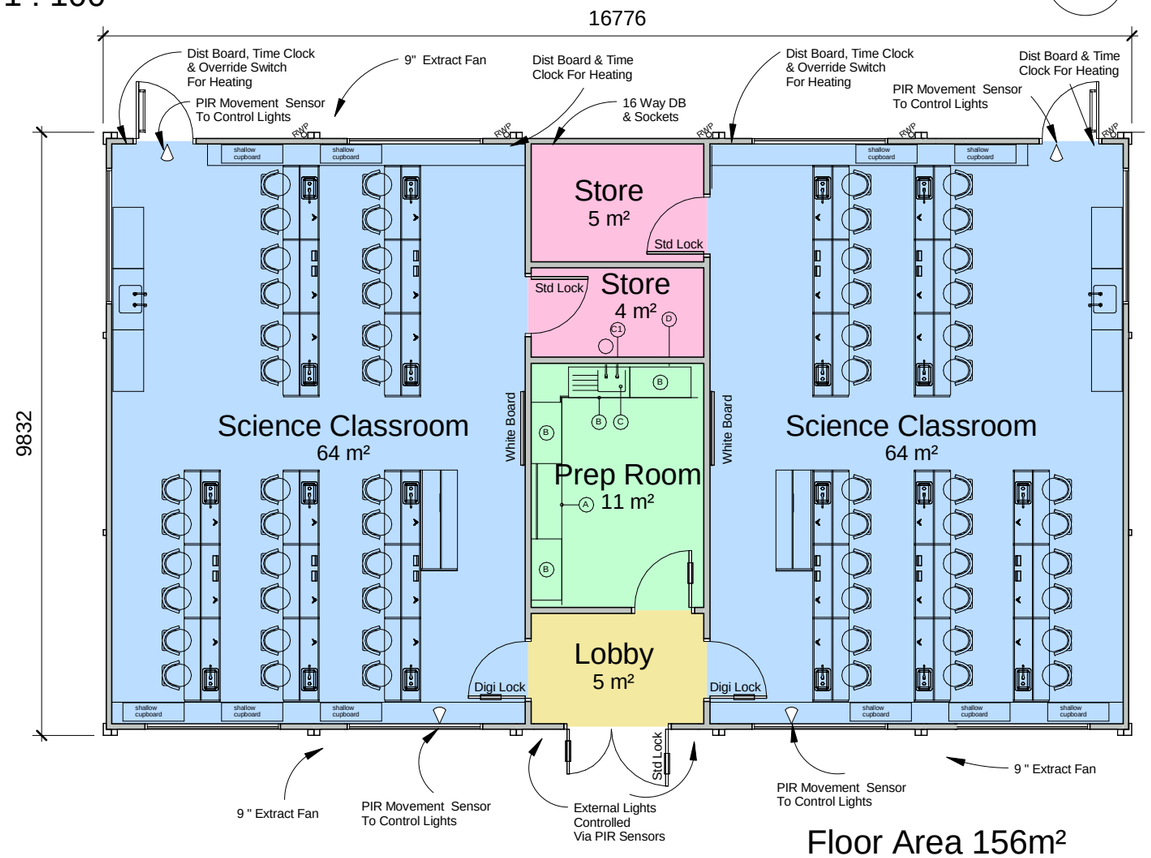

Floor Area 156m²

1 Plan Layout
1 : 100

Notes

1. Windows - white UPVC double glazed 2250 x 1250 - 2 Nr side opening and 1 Nr top opening. All to be fitted with locks and restrictors.

2. Steel External double doors with standard lock, fitted with white UPVC vision panels and 2 Nr and finger guards.

3. 2mm Flint grey polyfloor vinyl with polyurethen coating.

4. Internal doors to be American White Oak with finger guards. Classroom doors 926mm for disabled access, 3 Nr vision panels and kickplates fitted.

5. Each classroom to have whiteboards (2000mm x 1200mm).

6. Classroom lighting to be operated by PIR detectors, with manual override available. Note 2 Nr external bulkhead lights also PIR controlled.

7. 4 Nr double sockets to each classroom, 1 Nr single socket to lobby.

8. 2 Nr 9" extractor fans in each classroom

9. All partitioning supplied to be half hour fire resistant.

10. Painted skirting board

11. 2 kW wall mounted fan assisted heaters to each classroom, with time clock control.

12. The lighting provided is designed to be Category 3 level. This ensures a good general level of lighting is available to the teaching areas.

13. To ensure minimum running costs, lights in the teaching areas controlled by PIR's, will automatically be turned off 30 minutes after the last person has left the room - please note however that the PIR's can be over-ridden by the teacher and the lights turned off should there be a requirement; eg if the class is watching TV etc.

14. The two extractor fans supplied in each classroom to provide mechanical extract ventilation if required are operated via a wall switch in the classroom.

External Colour Scheme

Walls	- Honesty nearest BS ref 10C31
All Columns	- Honesty nearest BS ref 10C31
All Trims	- Honesty nearest BS ref 10C31
External Skirt	- Honesty nearest BS ref 10C31
Roof	- White nearest BS ref 00E55
Windows	- White nearest BS ref 00E55
Vision Panels	- White nearest BS ref 00E55
Doors	- Honesty nearest BS ref 10C31

Portakabin®

Quality - this time - next time - every time

Standard floor loading is 3kN/m². Any loading imposed on a floor that is greater than 3kN/m² may require strengthening. Please contact your hire centre if you expect to exceed 3kN/m².

Please note that this and any accompanying drawing(s) are for illustrative purposes only and as such, the building shown may vary from the actual finished building on site.

The position of windows, external doors and electrical fixtures (if shown) are dependent on stock availability at time of order.

Rev	Revision Description	Date	By
B	Ramp removed	25.02.14	MRB
A	Science layout amended.	17.02.14	MAT

Project Name	Science Labs
Client Name	Wildern School
Sheet Name	Plan and Elevations - Double Classroom Block - 5 x UK093 Ultima Modules
Date	06.01.14
Scale	1 : 100 @ A3
Drawing Number	HD/9430/01
Rev.	B
Drawn by	M.Tomlinson

This drawing is the property of Portakabin Limited, it must not be copied, reproduced or divulged to anyone without written permission.