

RISKS FOR BUILDING ELEMENTS:

Roof:-

Risk of falling appropriate safety gear and method of access to be used;
Risk of collapse from roof trusses;

Windows:

Risk of falling from window opening appropriate safety measures to be implemented;
Lifting hazard of lintels and windows appropriate lifting equipment to be used;
Risk of access obstruction from ground floor bay windows to elements at higher levels, suitable method of access to be used;

Walls:

Risk of wall collapse, suitable propping to be used where required

KEY OF SYMBOLS



RISK OF
FALLING




RISK OF
COLLAPSE



LIFTING
HAZARD



OBSTACLE
CONSIDERATION
ACCESS TO ELEMENTS
AT HIGH LEVEL

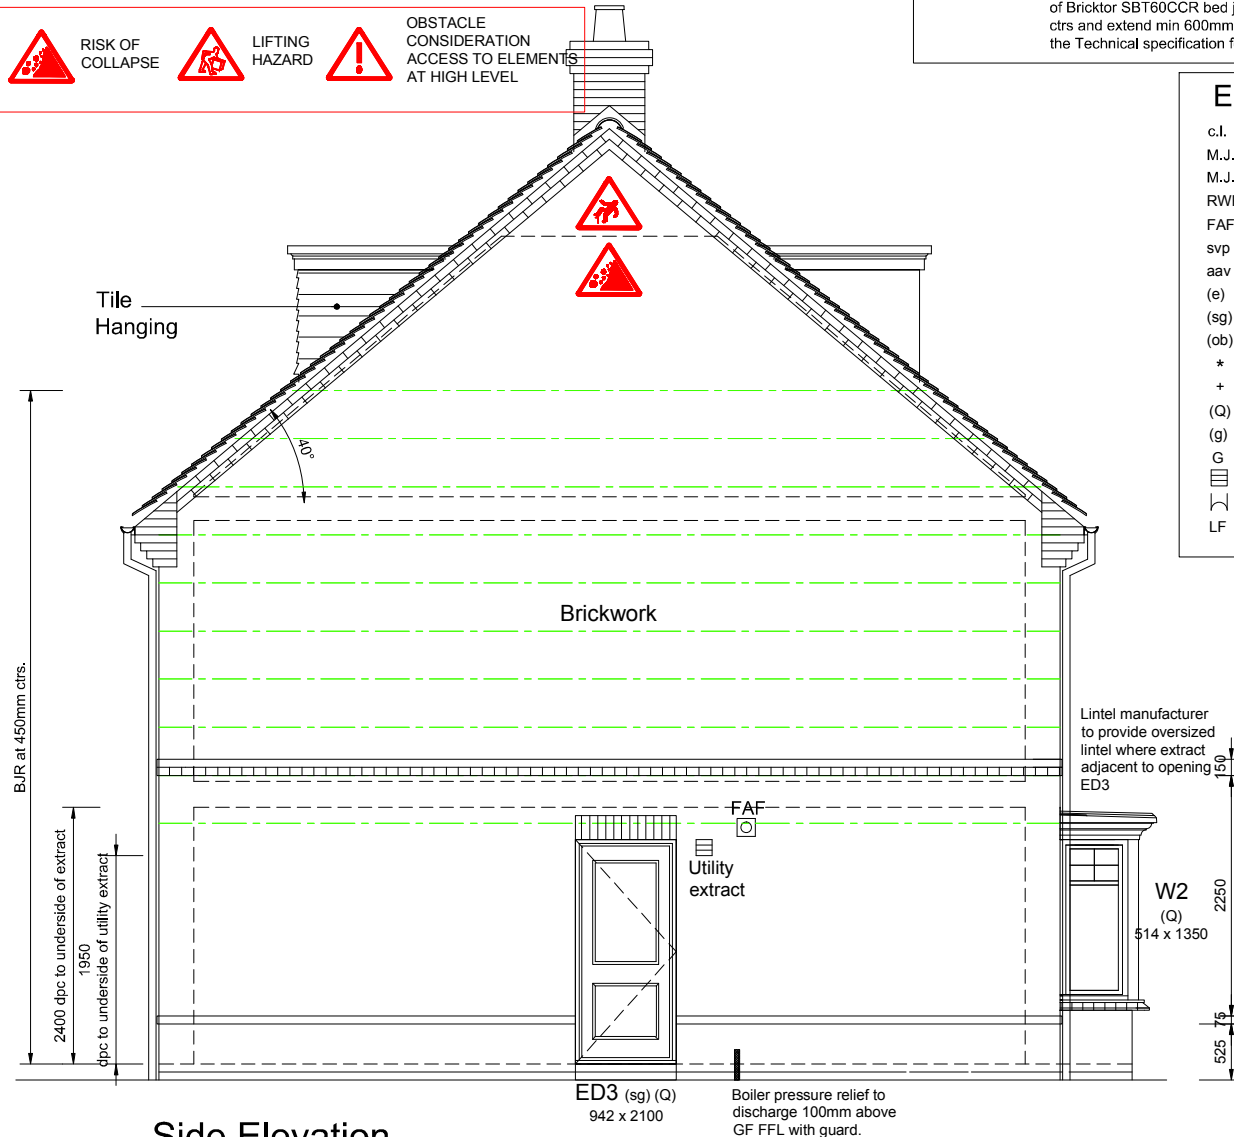

Side Elevation

NOTE: For bed joint reinforcement.
Elevations shown as Brick, no bed joint reinforcement
required. Setting out for Render/Recon Stone coursing
heights may be adjusted depending on openings.

NOTE: For rainwater downpipe locations,
refer to plot specific drawings.

NOTE: For recon stone units, ensure
mortar is colour matched to the stone.

Bed Joint Reinforcement Legend

BED JOINT REINFORCEMENT TO SUIT FENESTRATION DETAIL:
On units with reconstructed stone or Render finish install 2 rows of
Brickforce SBF35W60 bed joint reinforcement at 225/450mm vertical
ctrs as specified by structural engineers design. Refer to the
Technical specification for further information.

BRICKTOR BED JOINT REINFORCEMENT:
On units with reconstructed stone or Render finish install 2 rows
of Bricktor SBT60CCR bed joint reinforcement at 225mm vertical
ctrs and extend min 600mm past the structural opening. Refer to
the Technical specification for further information.

Elevation Legend

- c.l. Centre line
- M.J.B Movement joint in brick
- M.J.R Movement joint in render/recon stone
- RWP Rainwater pipe
- FAF Fan assisted flue
- svp Soil vent pipe
- aav Air admittance valve
- (e) Emergency egress window
- (sg) Safety glass to windows & doors
- (ob) Obscure glazing
- * Fixed glazing
- + Optional window
- (Q) Part Q compliant
- (g) Guarding to inside of window
- G Gas meter box
- Extract fan
- Tile vent for extract fan or SVP.
- LF Lead Flashing in accordance with the
lead association handbook

NOTES: THIS DRAWING IS TO BE READ IN
CONJUNCTION WITH THE LINDEN HOMES TECHNICAL
SPECIFICATION AND ALL OTHER PROJECT DRAWINGS,
NOT TO BE SCALED.

REV	DESCRIPTION	DATE	AUTH	CHK'D
-----	-------------	------	------	-------

Plots
As: 358
Opp:



© 2015 Linden Limited All Rights Reserved

PROJECT
The Linden Collection
For Linden Group
Boorley Green Phase 2 Parcel B5

DRAWING
THE FLETCHER
L1867/D5
Side Elevation

SCALE	DATE	AUTHOR	CHK'D
1:50 @ A3	April 2019	LD	WB
JOB NO.	DRAWING NO.	REV	
LHS306	FLE-603	C9	
CLIENT REF.			