



Ross Consulting

Solutions in Arboriculture and Landscape Management

Client- Andy Loizou

Site- 1 Rope Walk, Hamble-le-Rice, Eastleigh

Project- Construction Environment Management Plan

Report Date- 14th April 2022 Rev A 18.07.22

Compiled by- William Ross

William Ross, Tech Cert (Arbor A), Tech Arbor A Hnd(rm), Nd(np)
1 Appleton Close, Over Wallop, Stockbridge, Hants, SO20 8PA
TEL: 01264 781134 MOBILE: 07831614706 EMAIL: willross@rossconsultingalms.co.uk
www.rossconsultingalms.co.uk

CONTENTS

1.0 INSTRUCTION	3
1.1 Received From	3
1.2 Reasoning	3
2.0 INTRODUCTION	3
2.1 Background	3
2.2 Objective	3
2.3 Programme	3
2.4 Development Description	3
2.5 Working Hours	3
3.0 SITE LOGISTICS	4
3.1 Site logistics strategy	4
3.2 Construction Traffic Routes	4
3.2.3 Unloading/delivery arrangements to/from site	4
3.2.4 Storage of Materials	4
4.0 DUST RISK ASSESSMENT	5
4.1 Overview	5
4.2 Baseline Conditions	5
4.3 Work Methods	5
4.4 Site Evaluation	5
5.0 NOISE RISK ASSESSMENT	6
5.1 Overview	6
5.2 Work Methods	6
5.3 Baseline Conditions	6
5.4 Predicted Noise Risk	6
6.0 VIBRATION RISK ASESSMENT	7
6.1 Overview	7
6.2 Guidance Limits	7
6.3 Control Plan	7
7.0 NOISE, DUST AND VIBRATION CONTROL MEASURES	7
7.1 Site Personnel	7
7.2 General Control Measures	8
7.3 Site Specific Noise and Vibration Control Measures	8
7.4 Site Specific Dust Control Measures	8
8.0 GREEN ENVIRONMENT	9
8.1 Overview	9
8.2 Ecological Impacts	9
8.2.1 Bats	9

8.2.2 Nesting Birds.....	9
8.2.3 Overwintering Birds.....	10
8.3 General.....	10
8.3.1 Control Measures in relation to 8.3.....	10
8.3.2 Lack of Coordination /Poor Management and Limited Control Measures	11
8.4 Arboriculture.....	11
8.4.1 Tree Surgery & Tree Protection Measures.....	11
8.4.2 Installation of No Dig Car Parking	11
8.4.3 Tree Planting	11
9.0 FINISHING WORKS AND COMPLETION	11
9.1 General Monitoring.....	12
9.2 Landscaping	12
9.3 Final Snagging	12
9.4 Finishing Works.....	12
9.5 Completion and Handover	12

APPENDICES

Appendix One – Construction Management Plan

1.0 INSTRUCTION

1.1 Received From – Phil Laurenson of ADP Architects on behalf of Mr Andy Loizou

1.2 Reasoning – To provide a Construction Environment Management Plan as requested by Natural England (Email to EBC24/11/21 Ref 373520) to support Planning applications F/21/91037 & L/21/91048 XX for conversion of 1 Rope Walk, Hamble – ie- Rice to residential use.

2.0 INTRODUCTION

2.1 Background – The proposed development is the conversion of the Slipway, Rope Walk, Hamble from a restaurant to two residential dwellings, the existing building is Grade II Listed

2.2 Objective – To ensure environmental and management controls are in place during the construction process and to address NE concerns as outlined in **1.2 Reasoning**. This document is to be read in conjunction with **CMP drawing Ref 1799** and is **separate from** the construction phase health and safety plan which will be undertaken by a **competent person** and will also form part of the project documentation.

2.3 Programme – Provisional commencement date of the works is yet to be confirmed as its conditional on planning permission being granted.

2.4 Development Description – Remodelling of existing building to provide two dwellings to include

- Proposed 2 story extension
- General living accommodation
- Additional services and drainage
- Car Parking
- landscaping

2.5 Working Hours – On this site are

- Monday to Friday 07.30-18.00hrs
- Saturday 08.00-13.00

No heavy plant, noisy equipment or operations and deliveries will be permitted outside of these hours, including the collection or deliveries to site on a Sunday or Bank Holiday without prior notice to EBC and to include requirements they may impose. Local residents will be informed in advance of the proposed activities.

3.0 SITE LOGISTICS

3.1 Site logistics strategy – Indicates the construction access and has been devised to maximise security to the site and prevent unauthorised access. This also considers minimum impact on the community and ease of access routes on and around site to reduce any risk of collision or incidents involving traffic movement.

The main access to the site is off The High Street. The construction staff and operative's vehicles will enter the site as indicated on the construction management plan; additional parking is available in the Square Public Car Park. Parking in front of neighbouring properties will not be allowed

3.2 Construction Traffic Routes - Inclusive of Turning, Off-loading and Distribution

Due to the small working area large delivery vehicles will not be able to enter the site and these will be carefully controlled off The High Street (One Way) close to the site entrance. Smaller vehicles will have the ability to access the site, off load and turn around or to reverse utilising a trained banksman.

There will be a dedicated off-loading area together with allocated storage areas and clear instructions will be given to off load and distribute materials accordingly. The main contractor will be responsible for the traffic management on the project within the stated working hours of construction work, this is to minimise the impact on the local community and amenities during congested times:

3.2.3 Unloading/delivery arrangements to/from site

Idling vehicles will not be allowed so all construction vehicles and deliveries will need to be co-ordinated and restricted to one vehicle on site (access and egress) at any one time.

A dedicated loading / unloading area for one vehicle and area for turning and egress will be maintained during the construction process.

Vehicles must not wait in the area before or after making deliveries / collections. Deliveries are required to be Just-In- Time (JIT) with hauliers arriving before their time being moved on.

3.2.4 Storage of Materials - Materials will be stored in locations that are strategically planned and shown on the site strategy plan.

- The **locations for materials storage** will be within security fencing and lockable gates. Best practise methods of storing materials are to be followed, ensuring that the locations are away from any Root Protection Areas.
- The ground will be levelled and prepared, to ensure materials are safe and do not fall and break creating wastage, proprietary lockable COSHH stores within secure containers, bunded and well housed fuel storage in suitable planned locations.
- **Fuelling** will take place in an area designated by the main contractor with spill kits in place
- **Materials injurious to the Environment** – Will be stored away from drains and in an area to prevent run off during rainfall events
- **Spill Prevention** – Control measures must be in place at all times following the main contractors RAMS and Method Statements

- **Spill Control and Reporting** - The best form of control is prevention. The site is extremely sensitive due to the proximity to the river Hamble any spills must be cleared immediately following best practice to prevent contamination of drains and water courses. Spills must be recorded and reported to the site management for action as deemed appropriate as they may become a reportable incident if they enter drains

4.0 DUST RISK ASSESSMENT

4.1 Overview – To identify the level of risk of dust emission associated with the construction activities, and to propose a suitable mitigation strategy to ensure negative impacts are controlled.

4.2 Baseline Conditions – No baseline information is available for the site; however, it is understood that the baseline airborne particulate dust environment will be influenced by road traffic and dust from other sources.

4.3 Work Methods - Before construction begins a dust management plan will be put in place by the Main Contractor.

- Dust management will be undertaken at all times by site labour using screens and site damping during demolition and construction phase where appropriate
- Spoil heaps will also be dampened or covered during dry conditions. Covered skips and enclosed chutes employed where practicable.
- Dust suppression tools will be provided along with debris netting to scaffold areas otherwise cutting, sanding and grinding will be restricted to designated areas where practicable.
- Specific dust management will also be addressed by the main contractor within their method statements.
- Wheel washing facilities will be provided at the entrance to reduce the transference of mud/dust onto highways.

4.4 Site Evaluation – It is recognised that the level of risk attached to a construction site is dependent not only on the size and scale of a development, but also

- The activities,
- The timing of works (seasonality)
- The sensitivity of the surrounding area.

Therefore a dust risk assessment must be carried out by the Principal Contractor in accordance with Guidance on the assessment of dust from demolition and construction (http://iaqm.co.uk/wp-content/uploads/guidance/iaqm_guidance_report_draft1.4.pdf)

5.0 NOISE RISK ASSESSMENT

5.1 Overview – An assessment of the risk of construction noise generated by the proposed works, and the associated potential adverse effects on the surrounding area.

An assessment of the potential noise effects has been undertaken based upon the plant and equipment, scheduled construction activities and the programme of works as presented in this document.

5.2 Work Methods – Noise from all items of site plant will be kept to a minimum with the best practical measures being implemented to control noise.

- All electrical construction plant where possible will be provided with suitable attenuation
- vehicle exhaust silencers will be checked and monitored during the course of the works
- All items such as compressors will be lined where possible with acoustic covers and mufflers to reduce noise
- Site plant or machines will not be left running when not in use.
- Any temporary items of plant will be located away from site boundaries where possible.
- Operations on site that are likely to generate unacceptable levels of noise and vibration will be undertaken in a manner that minimises any nuisance and agreed with the trade contractors; method and risk assessments will be agreed (with the Council's environmental health officer if necessary) to ensure these works are carried out in an acceptable manner.
- If it is impracticable to incorporate satisfactory measures to adequately suppress noise and/or vibration nuisance, then these elements of works will be undertaken during restricted working hours to minimise the effect of adjacent residents

5.3 Baseline Conditions – Although no site-specific baseline information is available for the site, the main noise sources in the locality of the proposed development are from local traffic. Taking into consideration the number of dwellings potentially affected, the programme of works, and the scale of the development, a level of 65 dB is to be adopted to assess acceptability of this project.

5.4 Predicted Noise Risk – Predicted receptor noise risks been determined based on the plant listed for each activity in accordance with the proposed plant list and site program as detailed in the Construction Management Plan.
Appropriate screening from buildings and other local barriers will be installed and maintained for the duration of the project.

6.0 VIBRATION RISK ASSESSMENT

6.1 Overview – An assessment of the potential risk regarding vibration generated by the construction works detailed in this document, and the associated adverse effects on the surrounding area. The surrounding area is residential, and it is unlikely that these residential buildings will contain sensitive equipment at risk of adverse vibration effects.

The risk assessment has been based on an appraisal of the likely plant, examining the likelihood of each item generating significant levels of vibration at receptors.

6.2 Guidance Limits – Vibration levels will be evaluated against guidance presented in BS 5228 Part 2 in order to assess the likelihood of both structural damage to neighbouring buildings and the human response of the occupants.

6.3 Control Plan – To control and minimise vibration effects caused by construction activity; the vibration mitigation measures listed in this report will be adopted at all times.

- At the commencement of any potentially disturbing phases of works such as breaking out that are likely to cause complaints it is proposed that attended vibration measurements will be undertaken to ensure receiver levels remain below appropriate thresholds and prior warning and explanation of the works is to be given to residents.
- Works will be controlled on a risk-based approach with attended monitoring used to judge the acceptability of the works, and safe working distances going forward.

7.0 NOISE, DUST AND VIBRATION CONTROL MEASURES

7.1 Site Personnel - All operatives on site will be trained to ensure that noise minimisation and best practicable means (BPM) are implemented at all times.

- Staff will attend a general induction and task specific Toolbox Talks
- The Project Team and sub-contractors will be made aware of the importance of giving due consideration to the residential neighbours and general public
- Works will be checked regularly by the Site Supervisor to ensure that BPM is being implemented throughout the program of works
- Records of inspections and inductions/TBT will be kept in the site office

7.2 General Control Measures – To include:

- Suitability in the choice of methodology/technique for operations (including site layout)
- Consideration to eliminate or reduce emissions at sensitive locations
- Fixed items of construction plant will be electrically powered in preference to diesel or petrol driven
- Fabrication will be undertaken off site where practical
- Noisy plant will be kept as far away as possible from sensitive areas
- Each item of plant used will comply with the noise limits quoted in the relevant European Commission Directive 2000/14/EC/United Kingdom Statutory Instrument (SI) 2001/1701 [4] where appropriate
- Equipment will be well-maintained and will be used in the mode of operation that minimises noise
- Equipment will be shut down when not in use or throttled down to a minimum during waiting period
- Vehicles shall not wait or queue on the public highway with engines running
- All materials will be handled in a manner that minimises noise
- where possible deliveries will be arranged on a just-in-time basis to prevent vehicles queuing outside site

7.3 Site Specific Noise and Vibration Control Measures – Control measures specified below will be implemented:

- Plant which is considered to introduce the risk of potential noise effects to be limited to working between 08:00 – 16:30 hrs. and not permitted on weekends
- All fixed plant is to be kept within the demise of the site to reduce potential effects on neighbouring properties and is to be acoustically enclosed
- Hoardings are to be installed to the site boundaries to minimise noise emitted when loading
- Where possible materials to be pre-cut prior to site delivery to minimise any site trimming
- All HGV movements associated with the worksite will only take place during normal working hours, unless otherwise agreed and approved by the Council.

Refer to 8.2.2 Birds and 8.2.3 Overwintering Birds

7.4 Site Specific Dust Control Measures

- Dust generated by the construction process will be suppressed by suitable control measures such as a fine water spray /screens or methods otherwise deemed appropriate by the main contractor
- Skips to be covered as appropriate when not in use
- Cutting equipment to be used with water suppressant and/or suitable extract system
- No burning of waste wood or other materials on site
- Stockpiling of dust generating materials on site will be minimised
- Powder containers will be sealed when not in use.

- Immediate clean-up of spillages of dusty materials in place
- Wet brushing techniques will be used for cleaning
- Regular checks for visual observation of dust and soiling within 50m of site
- Dust deposition and/or soiling monitoring during construction phase
- No vehicle idling (unless required e.g., concrete wagon)
- Use of mains or battery powered plant where practicable

Refer to 8.2.2 Birds and 8.2.3 Overwintering Birds

8.0 GREEN ENVIRONMENT

8.1 Overview – Natural England expressed concern regarding the potential impact of the proposed development on the Solent Maritime Special Area of Conservation which is approx. 85m to the East (Peach Ecology Ecological Assessment 25/07/20). The particular points of concern are:

- Pollution control– solid and liquid
- Waste storage
- Surface water runoff management
- Bio Security

The majority of the above are addressed in the previous sections of this CEMP, the design team's opinion is that a separate section addressing the Green Environment should be included.

8.2 Ecological Impacts – Addressed in the **Peach Ecology Ecological Assessment 25/07/20 (PEEA)**, the points highlighted in the PEEA report must be adhered to:

8.2.1 Bats – The assessment did not identify presence of Bats although the following recommendations were made and must be followed:

- **Roof Stripping** – Removal of roof tiles must follow an agreed M/S and be carried out under Ecological supervision
- **Lighting** – New permanent external lighting will follow the agreed scheme lighting design, Temporary external lighting will be planned following ecological advice
- **Mitigation** - Two bat access tiles will be incorporated into the roof of the new extension as shown. These can be at the ridge or roof slope, depending on the style of tile

8.2.2 Nesting Birds – The nesting season is deemed to be between March and August although can differ as result of seasonal variations:

- **Due diligence** – Must be followed to include inspection of work areas (buildings and vegetation to be removed) to ensure there is no evidence of nesting activity/nests. Inspections will be carried out by suitably qualified ecologist who will also advise in the case that nests are present
- **Mitigation** – A house Sparrow box will be installed as part of the proposed works

8.2.3 Overwintering Birds – The Peach Ecology Assessment did not identify any potential impact on overwintering birds within or adjacent to the area of development as per 5.6 Birds or Appendix F Protected Species Legislation. The same considerations must be given to overwintering birds as would be given to birds during the nesting seasons, Works will be planned to minimize disturbance **ensuring 7.3 Noise and Vibration Control 7.4 Dust Control are strictly adhered to.** In the case further advice is required site management must contact the project ecologist.

8.3 General – A number of additional factors pose a risk of pollution impacting on the immediate environs and the Solent Maritime SAC unless precautions are in place, control measures are listed in **7.0 Noise, Dust and Vibration Control Measures**, those pertinent to water pollution are:

- **Surface Water Runoff Containing**
 - Chemicals harmful to the environment
 - Silt/dust/granular materials
 - Hydrocarbons (Fuel etc)
- **Solid Materials**
 - General rubbish either carried by the wind or surface water
 - Larger objects/rubble being washed into drains causing blockages leading to flooding
- **Machinery and Equipment Cleaning** – To be carried out in a dedicated area on hard standing on a purpose made portable wash bay with a bund to collect water, there is not sufficient space for a wheel wash
 - All cement mixer washing will be disposed of following industry practice and not disposed of in surface water drains
 - Mud and material removed from excavators will be disposed of in the provided skip
 - Washing area to be kept clean and tidied up after use

8.3.1 Control Measures in relation to 8.3 – Refer to **3.2.4 Storage of Materials** for related control measures

- **Surface Water Runoff**
 - Chemicals/Fuel will be stored in bunded containers
 - Decanting of all harmful liquids including fuel will take place on spill trays
 - Spill Kits will be present at all times
 - Liquid caught in spill trays/bunds and spent spill kit materials will be disposed of in the correct manner in the appropriate skips/bins
 - All spills will be reported to the Site Manager and the appropriate action taken
 - Major spills and those entering the drains must be immediately reported to the Environment Agency and other relevant Authorities
 - All soil, mud etc will be swept up and disposed of as it occurs
 - Drains will have silt traps fitted for the duration of the works, these will be inspected on a daily basis and emptied as required

- **Solid Materials** – Good House Keeping by site labourer
 - All trades will tidy up after themselves and put waste in skips
 - All general litter to be disposed of in bins
 - All materials that may enter or block drains to be removed as soon is apparent
- **Washing Water and Silt/Mud** – To be disposed of in the appropriate skip/tank

8.3.2 Lack of Coordination /Poor Management and Limited Control Measures:

Common factors contributing to pollution incidents the majority of which can be avoided apart from ‘unforeseeable’ incidents caused by external influences. Therefore, this CEMP and associated documents must be adhered to, if in doubt refer to the Project Team/Principal Contractor.

8.4 Arboriculture – An Arboricultural Implications Assessment and Method Statement (Eco Urban 02.08.20) has been produced to support the planning application, the key points applicable to the CEMP are outlined in the sections below:

8.4.1 Tree Surgery & Tree Protection Measures

- **Bird Nesting** – A check for nesting birds as per **8.2.2** must be carried out
- **Tree Removal** – T4 to be carried out prior to erection of Treed Protection fencing
- **Tree Surgery** – To be carried out as appropriated following liaison with the client and EBC Tree Officer, a check must be carried out re Statutory protection in the way of TPO’s/Conservation Areas
- **Tree Protection Fencing** – Following tree work and prior to any construction work commencing the TPF as per TPP and TPF spec must be erected
 - **TPF** will be signed off by the Project Arboriculturalist (PA) following installation
 - **TPF** will not be removed until the build phase is completed and signed off by the PA

8.4.2 Installation of No Dig Car Parking – To be carried out by a competent contractor:

- To be **briefed by the supplier** and following the Green Grid installation instructions and site-specific M/S
- **Arboricultural Supervision** – The setting out and site preparation will be under the supervision of the PA following a Task Specific Arboricultural Method Statement
- **Completion** – To be signed off by the PA

8.4.3 Tree Planting – To be carried out on completion of the build phase at the same time as final landscaping following industry best practice

9.0 FINISHING WORKS AND COMPLETION

9.1 General Monitoring – The site will be managed by the Project Team and each build stage signed off by the client's project manager this will include implementation of a good housekeeping programme to include the control measures within this CEMP. Records of inspections will be kept for inspection by the client, the LPA and statutory bodies.


9.2 Landscaping – To be carried out after completion of the build phase and prior to final finishing works, to be signed off by the client

9.3 Final Snagging – Inspection to be carried out by Clients PM and PC contracts & site manager, action points to be agreed and implemented.

9.4 Finishing Works – As required/agreed and to standard following best practice and the CEMP.


9.5 Completion and Handover – On final sign off.

William Ross 14th April 2022 Rev A 18.07.22



LINEAR SCALE 1:200
A3 @ 1:200

CONSTRUCTION MANAGEMENT PLAN 1:200

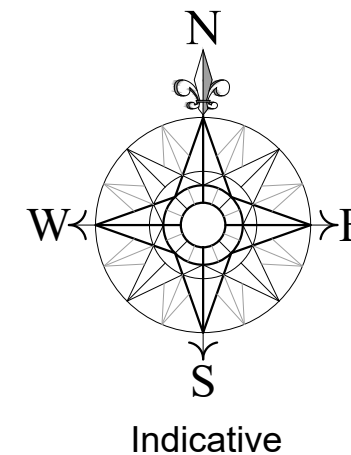



adp

rchite t lt
architects & urban designers

Tel: 01489 584503
Email: mail@adp-ltd.co.uk
www.adparchitectsltd.co.uk
Richmond Court, 94 Botley Road, Park Gate, Southampton, SO31 1BA

rev: date: note:

The site is based on a topographical survey undertaken by Browning Survey & Mapping ref: 06-063-01.
Surrounding information copied from Ordnance Surveys Promap. Crown Copyright. Licence Number 100022432

-  Material storage areas
-  Site office/welfare
-  Plant
-  Temporary spoil area
-  Operatives parking
-  Site hoarding/gates
-  Tree/hedge protection

Wheel Wash

Contractor's wheel washing facility:
To minimise dirt & mud being deposited onto the highway during construction wheels to be washed by pressure washer before exiting. This facility together with a sign requiring drivers to wash wheels before leaving site to remain until the completion of the development.

