

# 2500EA / 5000EA



Acoustic window ventilator

### Physical specification



All measurements in millimetres unless otherwise indicated

**Materials:** Aluminium Alloy

#### 2500EA Acoustic

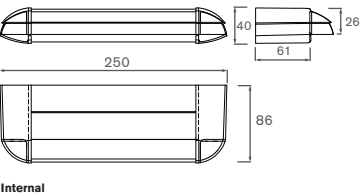

#### 5000EA Acoustic

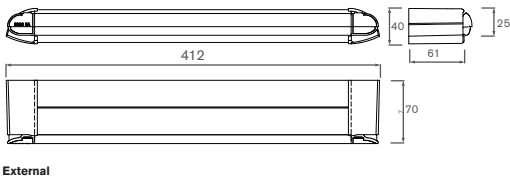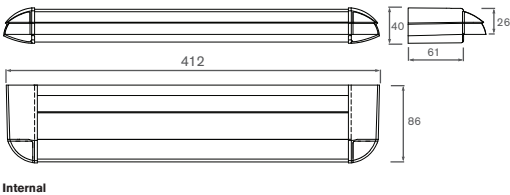

#### 2500EA Acoustic slot size

**Height:** 13mm

| Length |
|--------|
| 192mm  |

#### 5000EA Acoustic slot size

**Height:** 13mm

| Length | Central gap | Length |
|--------|-------------|--------|
| 172mm  | 10mm        | 172mm  |



The best of both worlds... achieves Building Regulations' EA requirements along with fantastic acoustic performances up to 45dB(A)

Features and benefits

- Smallest acoustic window vents providing 2500mm² or 5000mm² equivalent area ventilation on the market
- Achieves the best acoustic performance for window ventilators available within the UK – up to 45dB(A)
- A simple, yet adaptable, solution to meet required specification/ Building Regulation requirements incorporating both high levels of equivalent area ventilation and acoustic noise reduction
- Modularity of acoustic sets provides flexibility for installation and acoustic performance
- Aesthetically pleasing design which is easy to open and control by the homeowner
- Excellent airtightness performance with upward air deflection to reduce the risk of draughts
- May require add on section in some window installations


Sets comprise of:

**1 EA vent + 1 external acoustic module** – providing noise reduction with discreet internal aesthetics.

**1 EA vent + 2 acoustic modules** (for internal and external install) – providing maximum noise reduction.


Performance

2500EA acoustic performance



Key  
2500EAW.AC1      2500EAW.AC2

5000EA acoustic performance



Key  
5000EAW.AC1      5000EAW.AC2

Models, control options and key data

The discount group applied to Acoustic Ventilation is F1

| Product code | Description                       | Controls | Acoustic performance |            |              | Equivalent area mm² | Colour |  |
|--------------|-----------------------------------|----------|----------------------|------------|--------------|---------------------|--------|--|
|              |                                   |          | Dn,e,w               | Dn,e,w (C) | Dn,e,w (Ctr) |                     |        |  |
| 2500EAW.AC1  | Vent + 1 Acoustic External Module | Front    | 42dB(A)              | 41dB       | 40dB         | 2670                | White  |  |
| 2500EAW.AC2  | Vent + 2 Acoustic Modules         | Front    | 45dB(A)              | 43dB       | 42dB         | 2670                | White  |  |
| 5000EAW.AC1  | Vent + 1 Acoustic External Module | Front    | 39dB(A)              | 38dB       | 37dB         | 5350                | White  |  |
| 5000EAW.AC2  | Vent + 2 Acoustic Modules         | Front    | 42dB(A)              | 40dB       | 38dB         | 5350                | White  |  |