


TREE MITIGATION PLAN

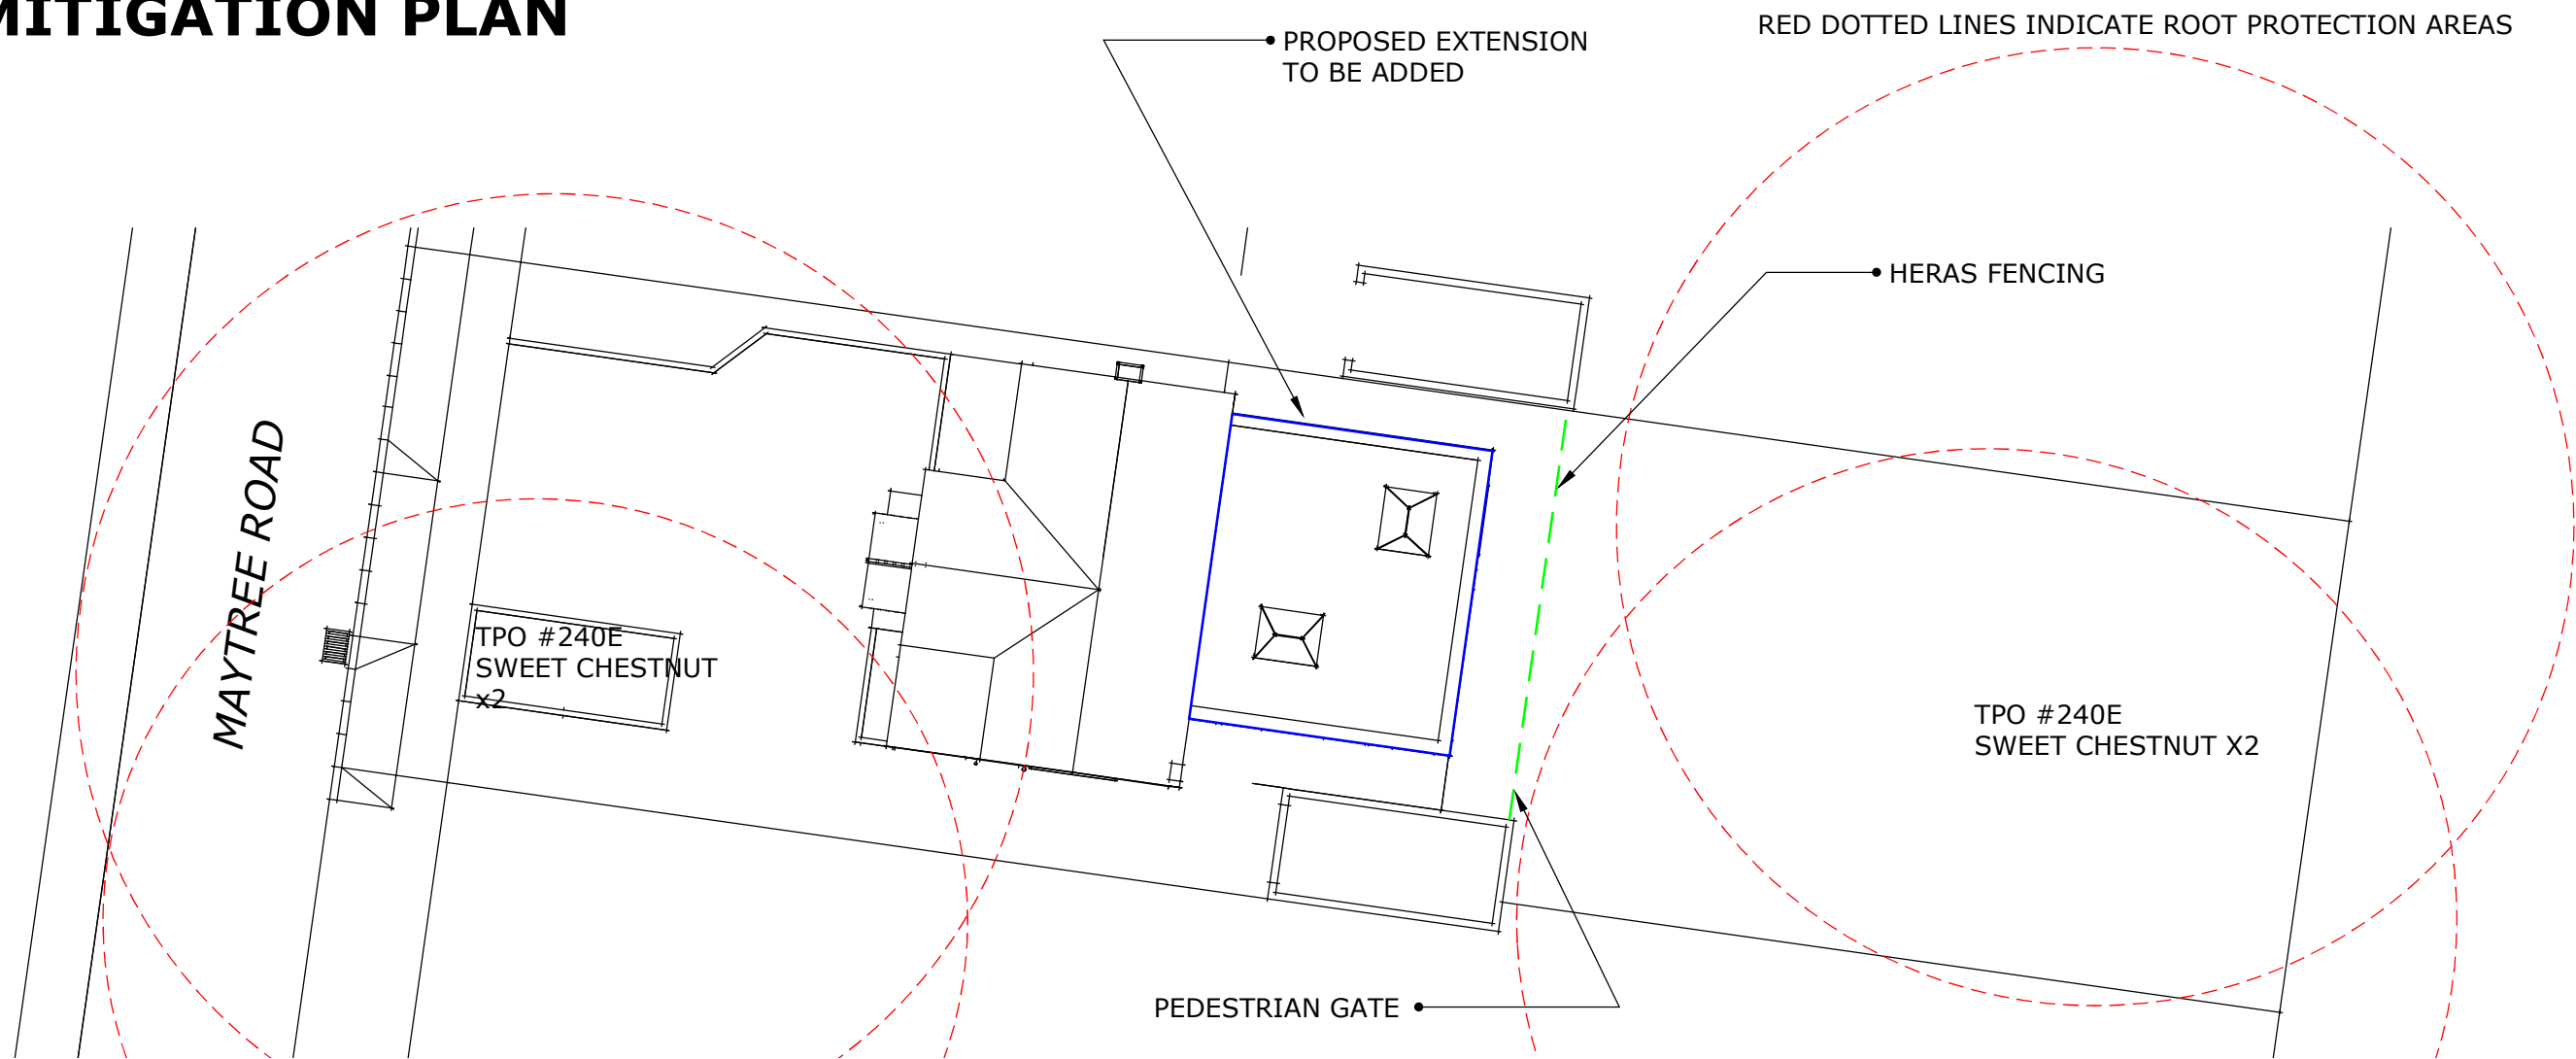

TREE MIGITATION PLAN AND METHOD STATEMENT

THE EXISTING DRIVEWAY AREA HAS BEEN DELIBERATELY DESIGNED TO MITIGATE DAMAGE TO TREE ROOTS (SEE RELATED APPLICATION H/24/98461 AND 11889_2025-01-17 v1 ADS complete).

THE GUIDELINES PROVIDED IN 11889_2025-01-17 v1 ADS WILL ALSO BE FOLLOWED FOR THIS EXTENSION PROJECT.

NO HEAVY MACHINERY (GREATER THAN 1.5 TONNES) TO BE PERMITTED TO CROSS THE RPA TO THE FRONT OF THE PROPERTY.

NO CONSTRUCTION ACTIVITY OF ANY KIND (INCLUDING MIXING/WASHING/PROCESSING OF MATERIALS) TO TAKE PLACE EITHER ON THE DRIVEWAY, OR WITHIN THE RPAs IN THE REAR GARDEN.

HERAS FENCING TO BE INSTALLED ACROSS THE BOUNDARY OF THE CONSTRUCTION SITE, AS INDICATED WITH GREEN DOTTED LINES ABOVE. A GATE WILL BE INSTALLED IN THE FENCING (ADJACENT TO THE GARAGE) TO PERMIT PEDESTRIAN ACCESS TO THE REAR OF THE GARDEN, FOR THE ENJOYMENT OF OCCUPANTS. NO CONSTRUCTION ACTIVITY TO TAKE PLACE BEYOND TREE PROTECTION MEASURES.

HERAS FENCING PANELS TO BE SECURED TO EACH OTHER WITH MINIMUM TWO CLIPS, AND SECURED TO THE GROUND VIA RUBBER FEET WHICH ARE PINNED TO THE GROUND.

INFORMATION NOTICES TO BE FIXED TO THE FENCING AT 5 METRE INTERVALS, AS PROVIDED IN 11889_2025-01-17 v1 ADS.

ALL CONSTRUCTION MATERIALS TO BE PLACED FOR TEMPORARY STORAGE IN THE AREA TO THE SIDE OF THE HOUSE / IN FRONT OF THE GARAGE.

DELIVERIES TO MAKE USE OF THE PUBLIC ROAD AND THEN TO BE TAKEN DIRECTLY TO THE STORAGE AREA.

AT NO TIME SHALL MATERIALS BE PLACED / STORED ON THE SOFT GROUND AREAS BEYOND TREE PROTECTION MEASURES OR WITHIN THE RPAs.

NO EXCAVATION TO TAKE PLACE WITHIN RPAs, WITHOUT FIRST SEEKING CONSULATION FROM EASTLEIGH BC.

THE SOFT GROUND WITHIN THE CONSTRUCTION SITE SHALL BE PROTECTED FROM DAMAGE FROM VEHICLE TRACKS VIA USE OF 18mm PLYWOOD SHEETS OR GROUND PROTECTION SHEETS.


MATERIALS WHICH PRESENT A RISK OF CONTAMINATING THE SOIL (E.G. CONCRETE MIXING, DIESEL OIL AND VEHICLE WASHINGS) SHALL NOT BE DISCHARGED WITHIN RPAs.

FIRES SHALL NOT BE LIT ON SITE. NOTICE BOARDS, CABLES OR OTHER SERVICES SHALL NOT BE ATTACHED TO ANY PART OF A TREE.

FOUNDATIONS SHALL BE OF THE TRENCH-FILL TYPE, AND WILL BE DUG OUTSIDE OF RPAs AND TREE PROTECTION MEASURES.

SHOULD ANY DAMAGE BE CAUSED TO TREES, EITHER BY THE ABOVE WORKS, OR AS THE RESULT OF ANY OTHER ACTIONS, THEN THE SITE SUPERVISOR SHALL REPORT THE DAMAGE TO A QUALIFIED ABORICULTURIST AND/OR EASTLEIGH BOROUGH COUNCIL.

WHEN EXTERIOR CONSTRUCTION ACTIVITY IS COMPLETE AND ALL MACHINERY HAS BEEN REMOVED, THE PROTECTIVE MEASURES WILL BE DISMANTLED AND REMOVED.



SCALE 1:200 WHEN PRINTED ON A3

DRAWING NUMBER	305B
TITLE	11 MAYTREE ROAD, SO53 5RT TREE MITIGATION PLAN
DRAWN BY	E. C. GOWER
DATE	16th FEB 2026
SHEET X OF Y	1 OF 1