THIS DRAWING MUST NOT BE SCALED

THIS DRAWING IS TO BE READ IN CONJUNCTION WITH:


1. R & R Construction notes
2. Current building regulations, N.H.B.C. & specifications.
3. All other project drawings, and specialist contractors details.
4. R&R drawings to be read in conjunction with Structural Engineer drawings.
5. For SAP, Code FSH and Energy requirements please refer to SAP ASSESSOR documentation.
6. Noise impact assessment and glazing specification SCL7014.200529.R1

- WASTE STORAGE
- MATERIALS
- PLANT
- SITE OFFICE / WELFARE
- CONTRACTOR PARKING
- RE-FUELLING STATION
- FUEL STORAGE, SPILL KITS & DRIP TRAY CONTAINER
- WHEEL WASHING HARDSTANDING
- LOCKABLE SOLVENT/ADDITIVE CONTAINER
- STORAGE
- PEDESTRIAN ACCESS
- TREE PROTECTION ZONE
- GROUND PROTECTION ZONE
- HAYBALES
- SITE ACCESS
- 2M HIGH SECURE HOARDING
- PHASING ZONES
- PROPOSED PLOT BOUNDARY
- SITE BOUNDARY
- TREE PROTECTION BARRIERS
- TEMPORARY LAND DRAIN
- WHEEELWASHING
- EXISTING VEGETATION / FABRIC TO BE REMOVED
- SGN PIPE
- ESSO PIPE

BUILDING, ENGINEERING AND OPERATIONS TO BE CARRIED OUT ONLY BETWEEN THE HOURS OF 0800 - 1800 MONDAY TO FRIDAY, 0800 - 1300 ON SATURDAYS AND SHALL NOT BE CARRIED OUT AT ANY TIME ON SUNDAYS OR PUBLIC HOLIDAYS. CONTRACTOR TO FOLLOW BRITISH STANDARDS CODE OF PRACTICE FOR NOISE AND VIBRATION CONTROL ON CONSTRUCTION AND OPEN SITES

REFER TO FOLLOWING DOCUMENTATION PRIOR TO UNDERTAKING ANY WORKS ON SITE;
- HELLIS & SOLUTIONS LIMITED TREE REPORT REF: 19/12/241/NH DATED NOVEMBER 2020 V5.0
- HELLIS & SOLUTIONS LIMITED CONSTRUCTION METHOD STATEMENT FOR ACCESS CONSTRUCTION METHODOLOGY
- THE LANDSCAPE MANAGEMENT AND MAINTENANCE PLAN DWG NO. 1038-5400 REV E

TREE PROTECTION ZONES ARE INDICATIVE, REFERENCE SHOULD BE MADE TO HELLIS & SOLUTIONS LIMITED TREE PROTECTION PLANS FOR ACTUAL ZONING

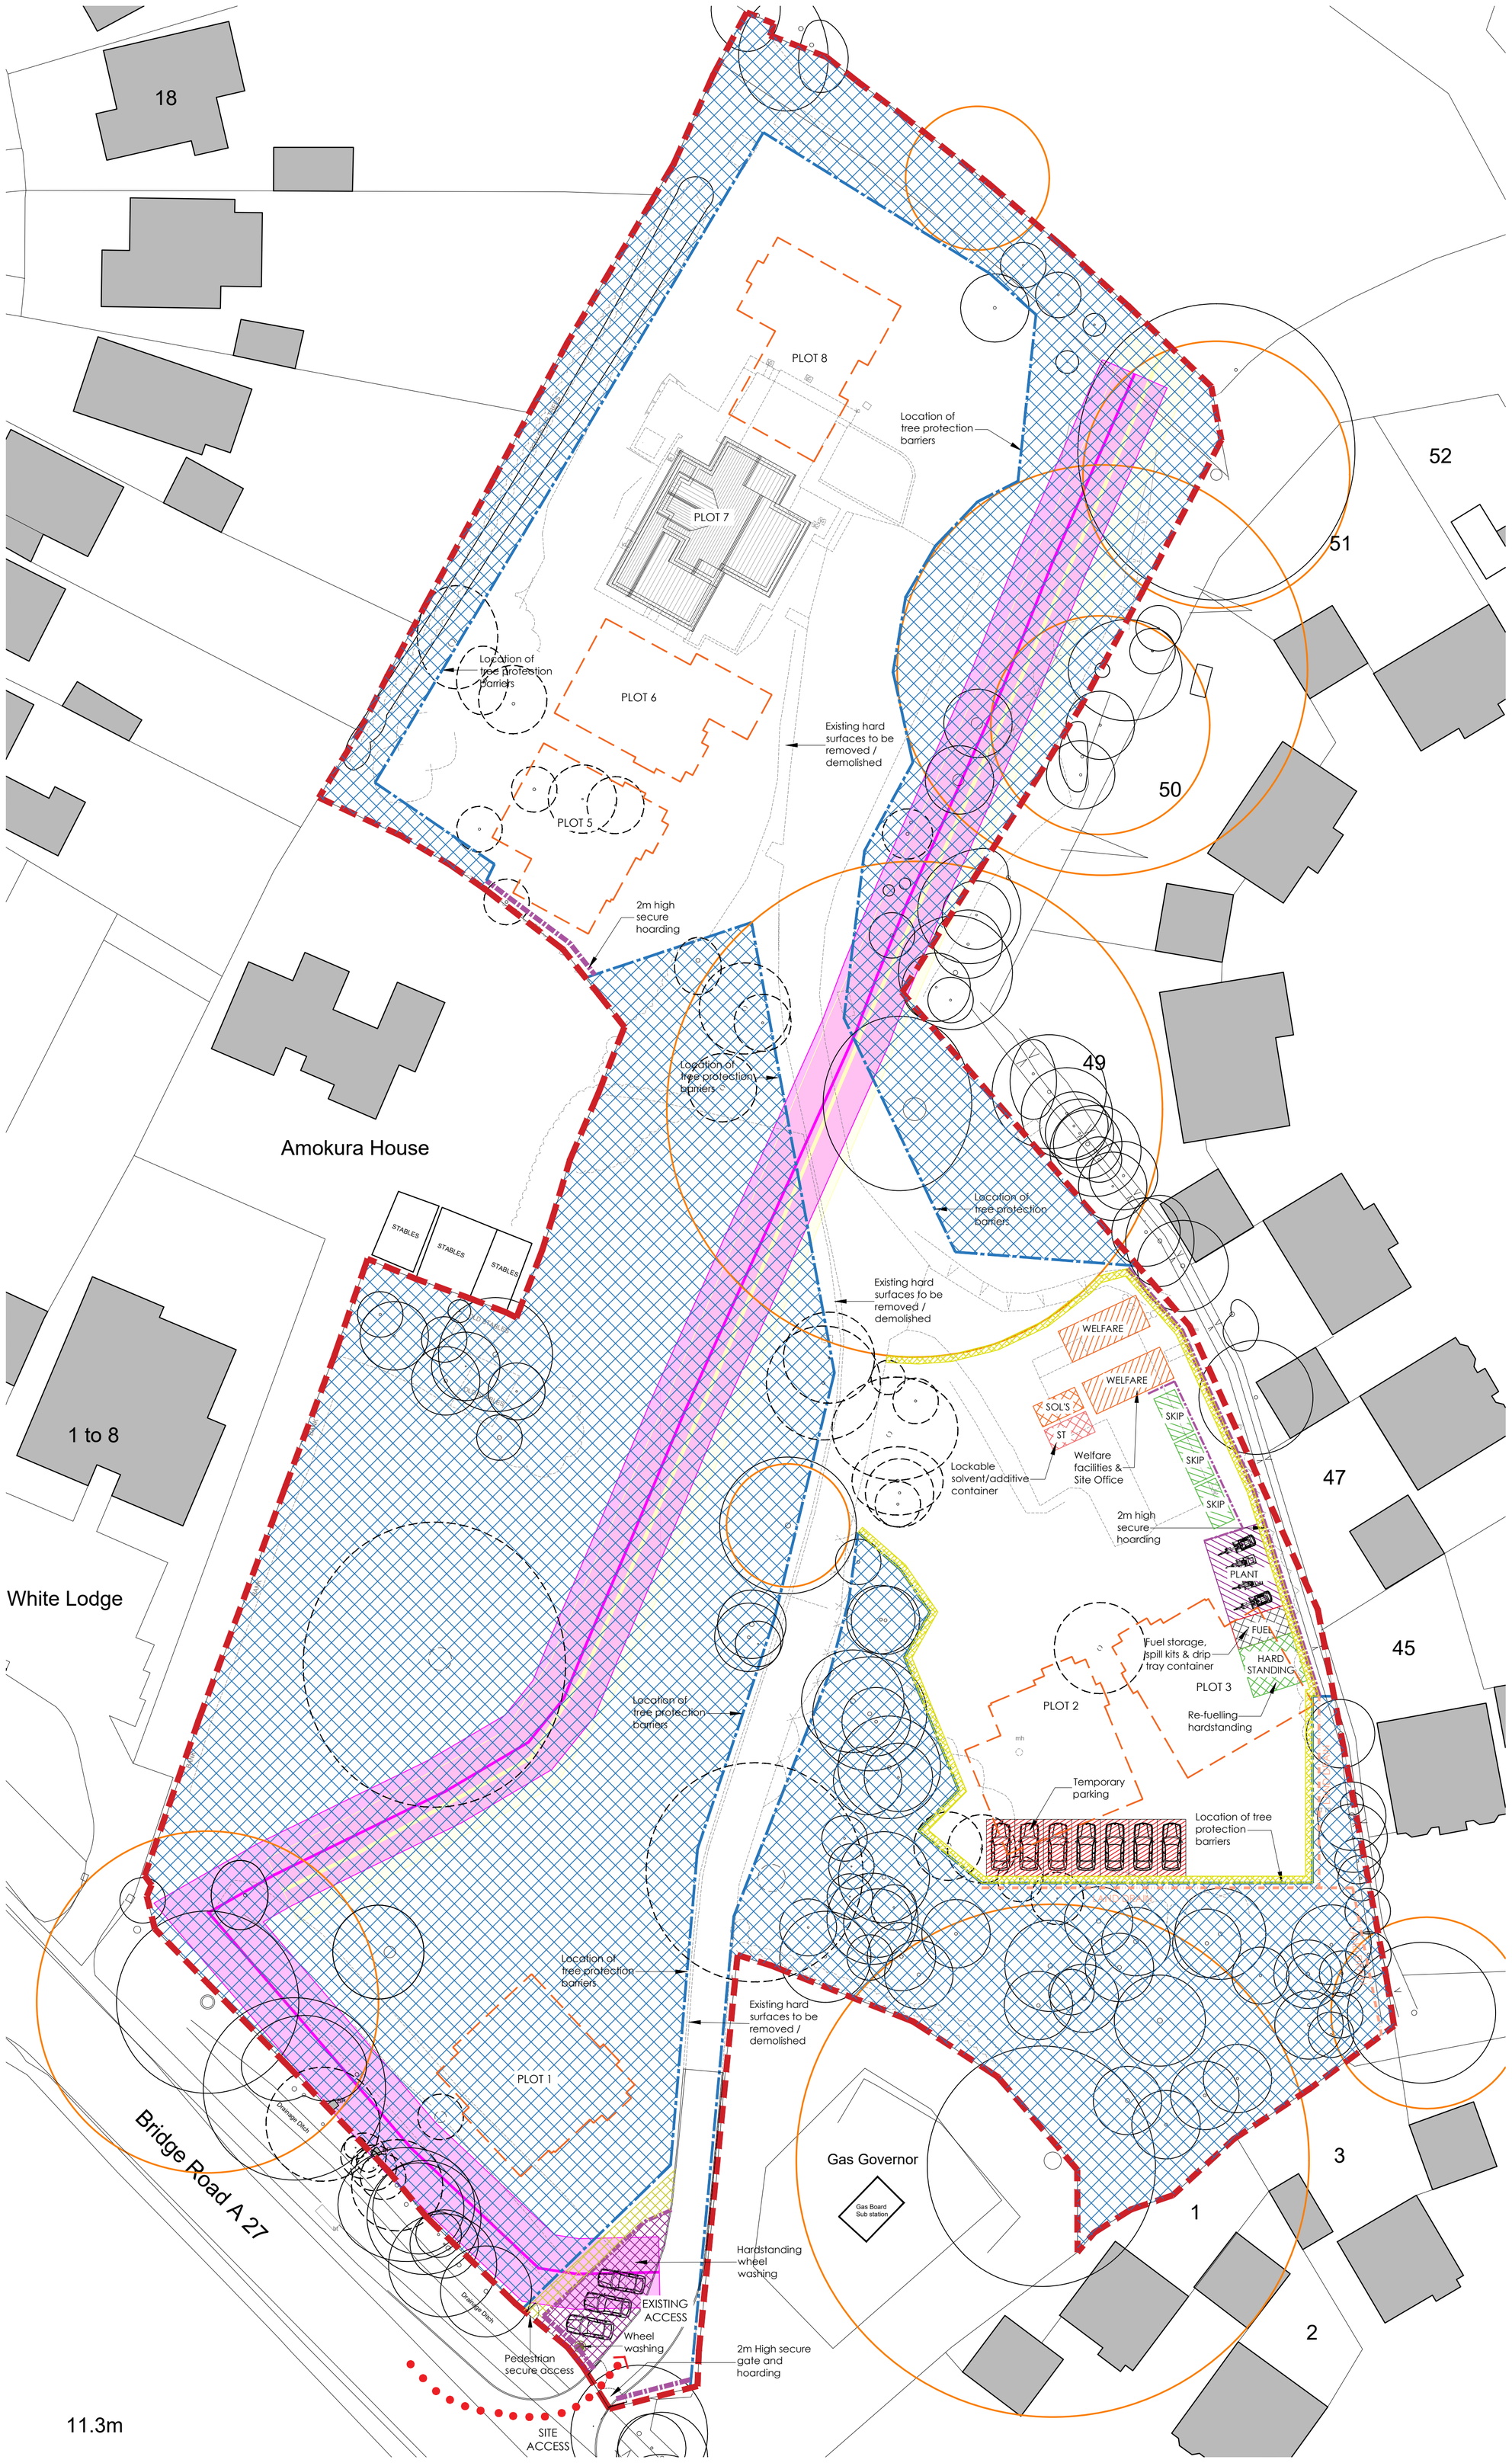

notes:

revisions:

A	14.12.2022	GR	Plan updated
B	16.05.2023	GR	Haybales temporary land drain added
C	11.09.2023	GR	Plan updated

0 100mm @A1

NOTE: The contractor is responsible for checking all site dimensions and levels. These should be checked prior to the ordering of any components and before the commencement of the works. All discrepancies should be brought to the attention of the Contract Administrator

Capital Homes

Bridge Road

Bursledon

drawing information

title: CEMP plan 1 of 4 site set-up

status: Planning
date: July 2022
scale: NTS @A1
drawn: GR
chk'd: SCR

R & R DESIGN STUDIO LTD

job: 1122 dwg: 1110 rev: C