


Eastleigh Borough Council Tree Preservation Order and Conservation Area Assessment Form

Application Number	T/26/101451					
Surveyor	IF					
Address	Land to the rear of 60-64 Thistle Road, Hedge End, SO30 4TS					
Proposed work	1no. Oak (T2) - Reduce crown by 2-3 m all over to leave a finished branch length of approximately 5 m north, 1m East, 4m South and 7m West for management. 1no. Oak (T4) - Fell tree for risk management 1no. Oak (T5) - Reduce crown by 2-3 m to previous pruning points for management.					
Assessment Date	15/07/2026					
Officer comments	TPO 851-E (G1) a group of 14no. Oak A group of mature oak trees behind the properties at Thistle Road provide a high level of public amenity and are visible over the rooftops. T2 is at the rear of number 64 Thistle Road. The tree was pruned in the past, it has an asymmetrical crown with a pronounced bias over the residential garden, some deadwood is present in the crown. The proposed reduction of the canopy to achieve finished branch measurements as stated in the proposal are considered to be a reasonable management measure and will not significantly affect the tree's amenity nor is it likely to cause detrimental effect to its long-term health and vitality. T5 appears healthy overall, it has a natural lean and does overhang significantly into the rear garden of number 60 Thistle Road. The proposed crown reduction back to the previous points is considered a reasonable management of the tree in its environment. T4 the crown appears healthy however on the inspection of the stem and base of the tree it becomes apparent that the multiple dysfunctions along the stem and bark necrosis exposing the decaying wood is a significant defect that warrants removal given the size and targets of the tree for health and safety. Replant.					
Decision	Consent	Refuse	Part consent/ Part refuse	Withdrawn / Invalid	Conservation Area	
					Raise no objection	TPO
	X					
Decision notice	Consent to: 1no. Oak (T2) - Reduce crown by 2-3 m all over to leave a finished branch length of approximately 5 m north, 1m East, 4m South					

	and 7m West for management. 1no. Oak (T4) - Fell tree for risk management. 1no. Oak (T5) - Reduce crown by 2-3 m to previous pruning points for management.		
Conditions	Replant 1no. Oak of min 12cm girth close to the original location.		
Notes to applicant			
Parish comments	No Objection subject to suitable replacement planting and the usual conditions of the tree officer.		
Public objection/ support	Support	Objection	Observation
	1	0	1
Objection/ support consideration			



T5

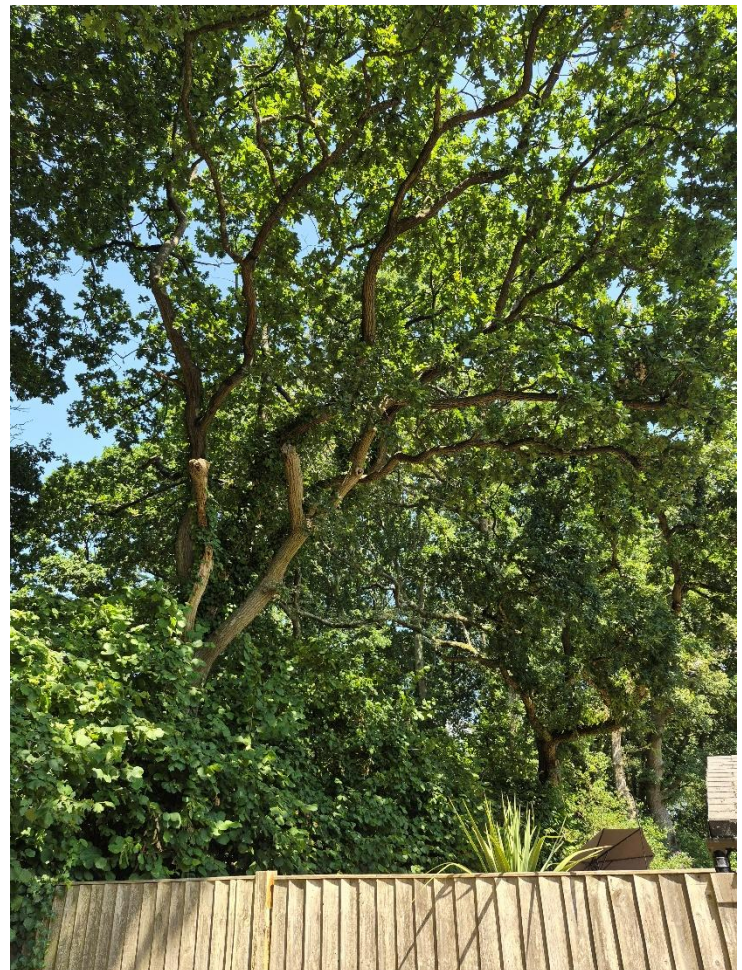

T2

